

Body

india's strongest tile body

built to last for decades

3

Original

india's first and original
authentic full body tile

Full

from top to bottom
same design· same color

 Restile
every inch of **imagination**



THE ORIGINAL FULL BODY TILES


WHAT YOU SEE

ON TOP

IS WHAT YOU HAVE

ON THE INSIDE

GREEN - OUR BADGE OF HONOR!

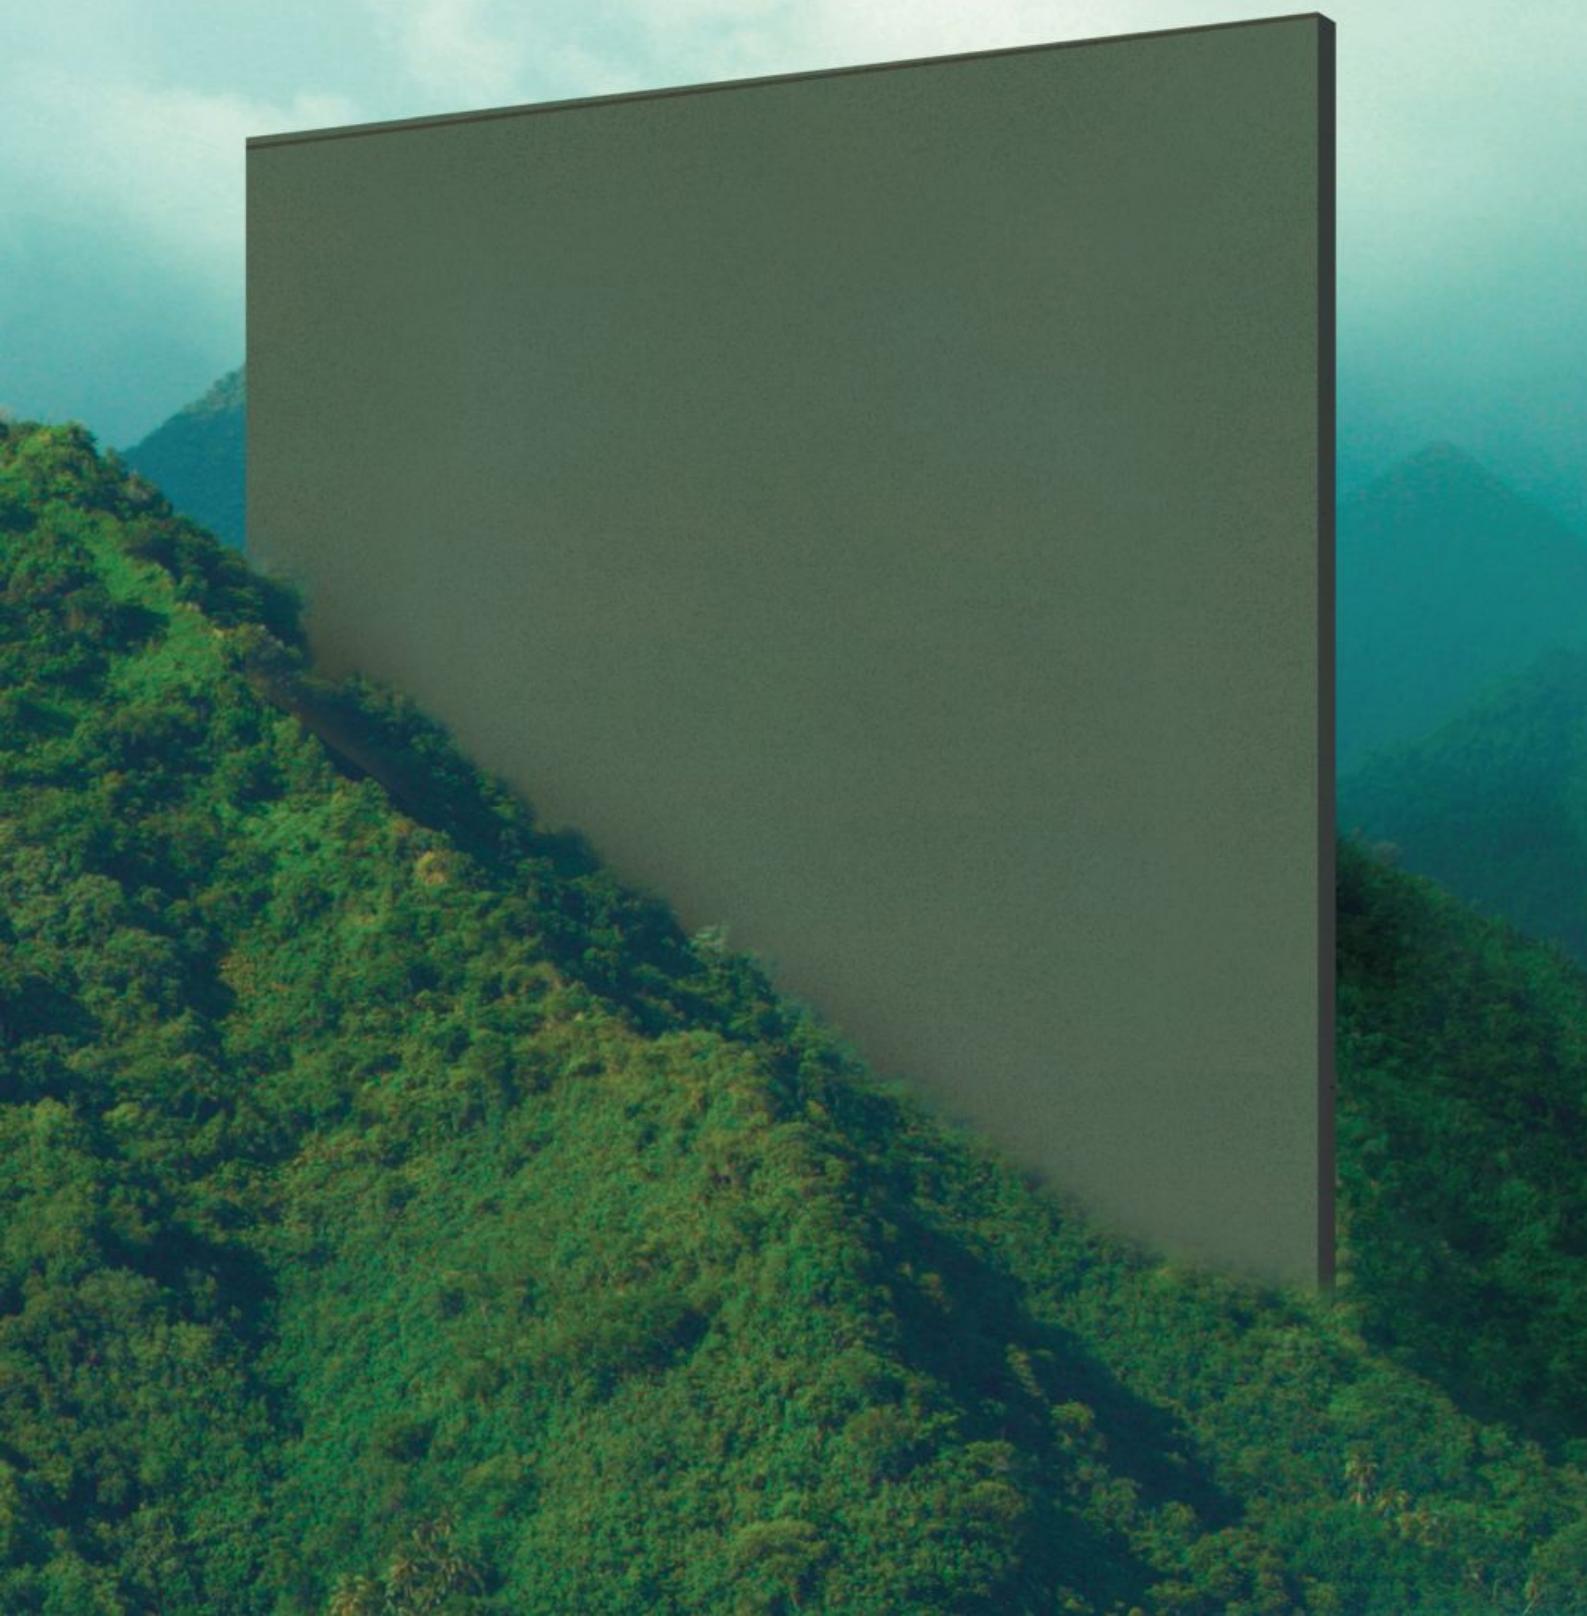

RECYCLING WATER

RECYCLING POWDER WASTAGE

RECYCLING HEAT EXHAUST

RECYCLING TILES

2MW GREEN SOLAR ENERGY

1 ACRE ORGANIC FARMING



FROM EVERY ANGLE.
ALL YOU SEE IS **AUTHENTIC TILES!**

UNIQUE
METAL
PUNCH



THROUGH
BODY
DESIGNS!

UNIQUE
MATTE
SURFACE

FULL
BODY
COLOR

FEEL IT, TO BELIEVE IT
OUR UNIQUE METAL SURFACE FINISH



Restile has been in the tiling industry for over three decades, and our belief in manufacturing 100% Naturally Pressed Designs that Mother Nature has to offer with 0% Digital Printing, and 0% Glaze Coating is still as strong. This makes our tiles very sustainable and durable. Restile has always had its love for designing tiles for Architects, and we are constantly updating our products and technology to give our Customers a more Authentic Flooring Experience.

Our Dream and Imagination leads us to Innovation and its this innovation that creates Trends. Proudly carrying the tag of "**TREND SETTERS**" in the tiling segment. Restile showcases its whole product range in this catalogue which imbibes Restile's signature "Unpolished" Smooth Matte surface finish, and also be available in polished finish, making it the ideal choice for both indoor and outdoor settings.

The tiling industry has always made every efforts in making itself Eco-Friendly. From using energy saving machinery, to recycling water and waste material. At Restile, we truly believe that green is not just a color, but a badge of honor to be worn by those who truly care for the environment.



Let us Floor You!



ABOUT

PROCESS	8	COLORS	14-27
MATERIAL	9	SALT N PEPPER	28-39
FINISH	10	CHIPS	40-49
APPLICATION	11	MAKERS	50-58
SIZES & THICKNESS	12	STEP-UP	59-64
		IMPACTA	65-75
		TECH SPECS	76-82

COLLECTIONS



RAW MATERIAL

Only Natural and the highest quality of Raw Materials sourced from the best mines are used in the our production process to give you the best and most authentic Full Body Homogeneous Porcelain Tile!

CHIPS & GRAINS

A variety of natural color powders is used in the making of our in house chips scalia and grains which is used in our products to elevate the experience of your flooring.

RANDOM EFFECT

The distribution of the colors and grain randomly blended to create a unique unrepeatable mix in every tile. Each tile composes a harmony with the unique fascination of nature and hand craftsmanship

PRESSURE & FIRE

Restile Full Body Tiles - An exceptionally solid rock hard material is the result of the highest pressure and compaction of the powder and ultra high firing temperatures which welds fuses the material.

**SOLID, STRONG,
LONG LASTING**

Naturally
yours.



**STRONGEST
AUTHENTIC
FULL BODY**

Color of the tile - from **top** to bottom
Design of the tile - from top to **bottom**

Full Body Homogeneous Vitrified Tiles are the only product that is the most preferred and recommended tile for any project / commercial flooring. With Advancements in technology, and continuous R&D, we have also developed products in Full Body Tile that will bring new life to any interior space, and give you the feel of granite in various sizes and colors. Experience the truest form of flooring tiles, and make every square feet matter.

FINISHES



MATT



POLISH



**ANTI-SKID
SANDY. R>II**




**ANTI-SKID
FLAMED. R>I2**



APPLICATION AREAS



RESIDENTIAL



GARDEN & POOL



HOTELS



SCHOOLS & COLLEGE



OFFICE



CAFE & RESTAURANT



SUPERMARKET



MALLS



PUBLIC SPACES



AIRPORTS



TRAIN STATION



INDUSTRY

IDEAS ARE **ENDLESS**, APPLICATION IS **LIMITLESS**



THICKNESS UPTO **20MM**

EVERY SPACE HAS DIFFERENT LOAD
REQUIREMENTS - AND RESTILE
TILES CAN HANDLE THE HEAVIEST
LOAD YOU THROW AT IT.

STEPS

5FT

4FT

3FT

5FT SLABS

4FT SLABS

3FT SLABS

1520x310MM
1200x300MM | 1220x310MM
1030x300MM | 920x300MM

1520X640MM
thickness: 10 MM

1200X600MM
thickness: 10 MM

920X615MM
thickness: 10 MM

800X800MM
thickness: 10 MM

600X600MM
thickness: 9 MM

600X300MM
thickness: 9 MM

300X300MM
thickness: 9 MM

**GET YOUR EXCLUSIVE
FULL BODY TILES NOW!**





**RICH, DENSE, PLAYFUL
FULL BODY COLORS!**

COLORS COLLECTION

A dash of color to spice up any space. The richness and density of the colors are attained because of the full body properties of the tile. The tile is of the same color from top to bottom, giving the best sustainable and durable product, and leave you with a look and feel that leaves you awe-struck.



FULL
BODY
COLOR

THRU
BODY
DESIGNS

UN-
GLAZED
SURFACE

ANTI-
SLIP
R>10

TECHNICAL
GRANITO
PORCELAIN



AZZURO

FINISHES:
SM

SIZES:
300X300*, 600X300*, 600X600, 800X800* MM
SLAB - 1200X600* MM

*requires moq



POLO

FINISHES:
SM

SIZES:
300X300*, 600X300*, 600X600, 800X800* MM
SLAB - 1200X600* MM

*requires moq





SUPER POLO

FINISHES:
SM, PL*

SIZES:
300X300*, 600X300*, 600X600, 800X800* MM
SLAB - 1200X600, 1520X640 MM
STEP - 1200X300, 1520X310 MM

*requires moq



STEEL GREY

FINISHES:
SM. PL*

SIZES:
300X300*, 600X300*, 600X600, 800X800* MM
SLAB - 1200X600, 1520X640 MM
STEP - 1200X300, 1520X310 MM

*requires moq



DARK GREY

FINISHES:
SM. PL*

SIZES:
300X300*, 600X300*, 600X600, 800X800* MM
SLAB - 1200X600 MM

*requires moq



KOTA GREEN

FINISHES:
SM. PL*

SIZES:
300X300*, 600X300*, 600X600, 800X800* MM
SLAB - 1200X600, 1520X640 MM
STEP - 1200X300, 1520X310 MM

*requires moq





ESPRESSO

FINISHES:
SM

SIZES:
300X300*, 600X300*, 600X600, 800X800* MM
SLAB - 1200X600* MM

*requires moq



NERO

FINISHES:
SM. PL*

SIZES:
300X300*, 600X300*, 600X600, 800X800* MM
SLAB - 1200X600 MM

*requires moq





TERACOTTA

FINISHES:
SM.

SIZES:
300X300*, 600X300*, 600X600, 800X800* MM
SLAB - 1200X600* MM

*requires moq




TRENDY

FINISHES:
SM

SIZES:
300X300*, 600X300*, 600X600, 800X800* MM
SLAB - 1200X600* MM

*requires moq



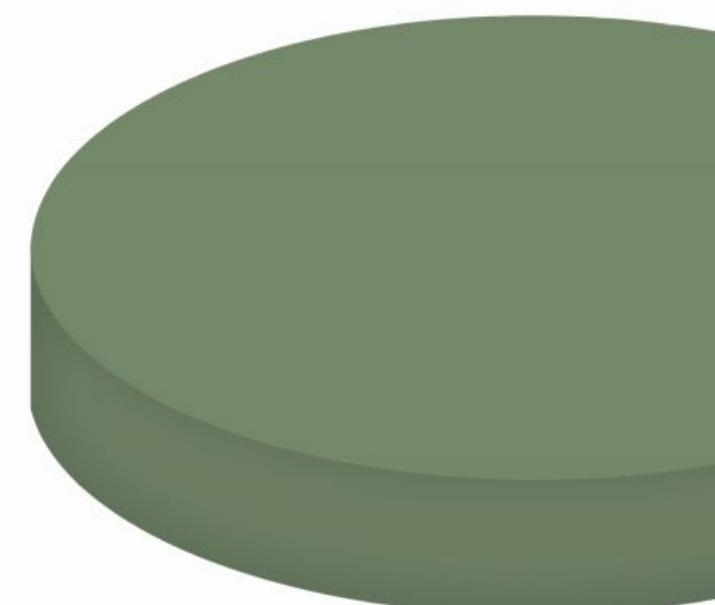

JADE

FINISHES:
SM

SIZES:
300X300*, 600X300*, 600X600, 800X800* MM
SLAB - 1200X600* MM

*requires moq



MUSHROOM

FINISHES:
SM, PL*

SIZES:
300X300*, 600X300*, 600X600, 800X800* MM
SLAB - 1200X600* MM

*requires moq






ROSETTA

FINISHES:
SM

SIZES:
300X300*, 600X300*, 600X600, 800X800* MM
SLAB - 1200X600* MM

*requires moq

INSPIRED BY GRANITE! GRANAMITE TILES

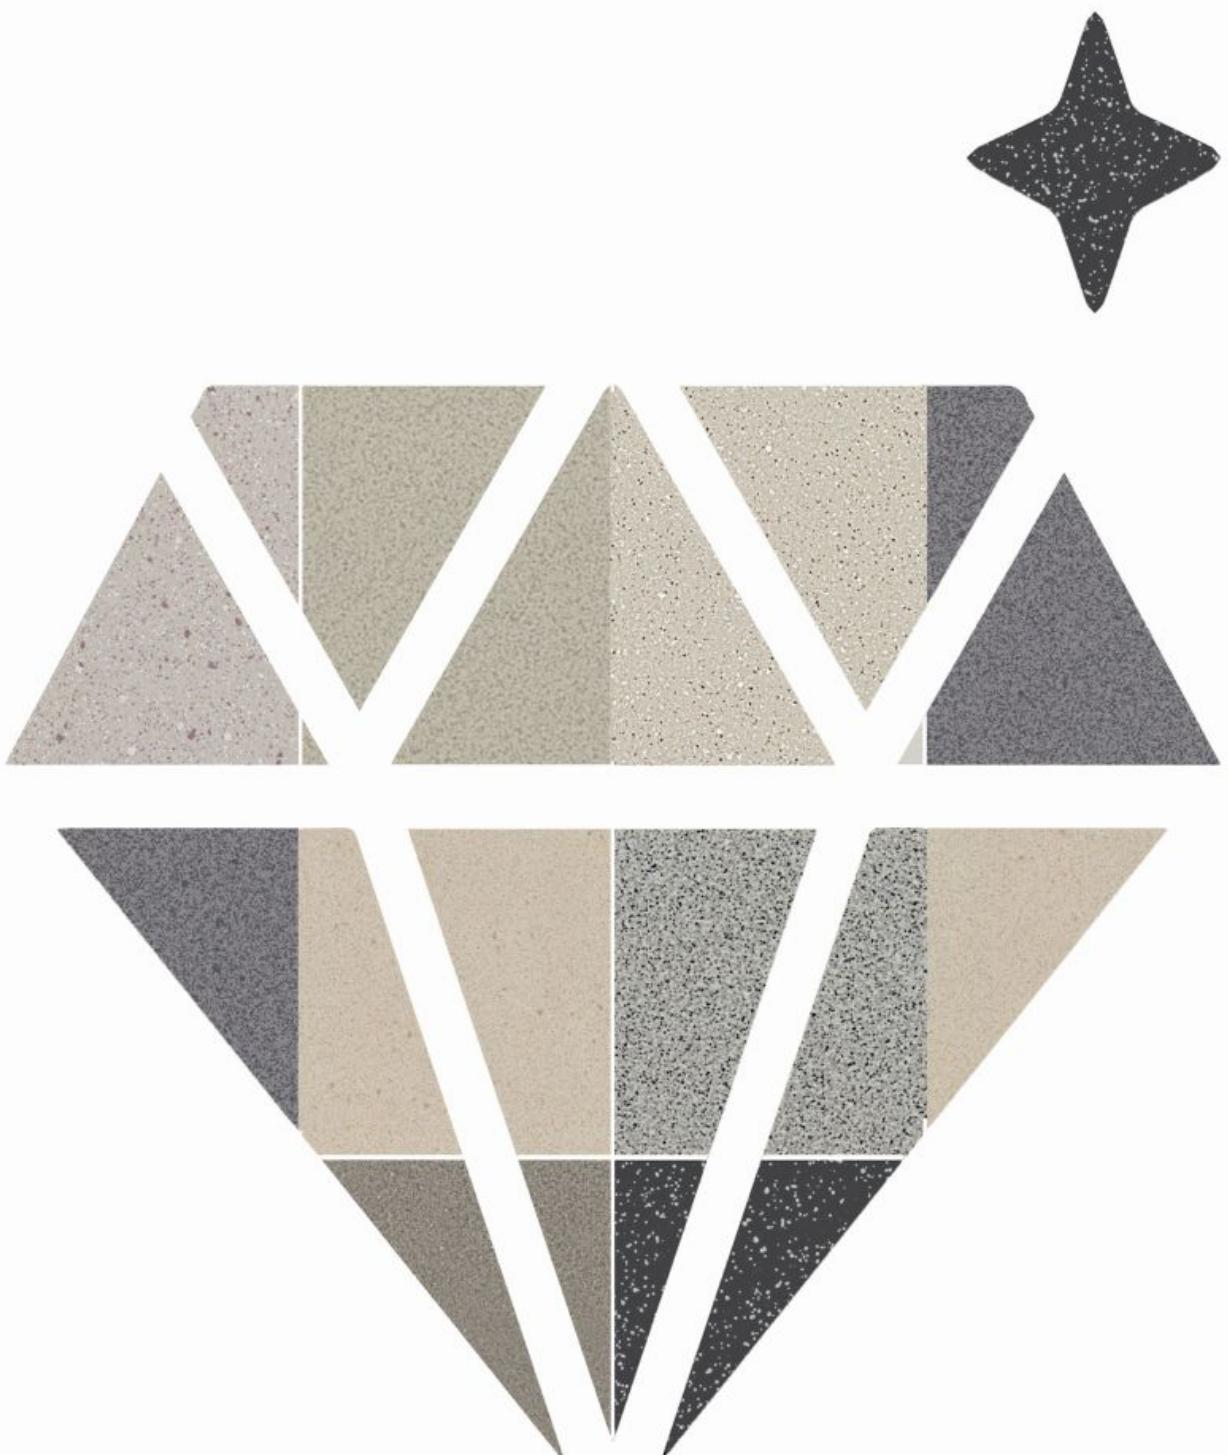

GRANAMITE COLLECTION

Full-body / Absolute Through-body design tiles comes in the rich eloquence of granite. Also known as the "Immortals of Tiles", no matter how rough the usage, the look of the tile stil looks brand new, if not even better. This collection offers a salt and pepper look coming close to some inspired granites.



FULL
BODY
COLOR

THRU
BODY
DESIGNS

UN-
GLAZED
SURFACE

ANTI-
SLIP
R>10

TECHNICAL
GRANITO
PORCELAIN



Restile
every inch of **imagination**

ELENA

FINISHES:
SM. PL*

SIZES:
300X300*. 600X300*. 600X600. 800X800* MM
SLAB - 1200X600. 1520X640 MM
STEP - 1200X300. 1520X310 MM

*requires moq






Restile
every inch of **imagination**

SPECKLED GREY

FINISHES:
SM, PL*

SIZES:
300X300*, 600X300*, 600X600, 800X800* MM
SLAB - 1200X600 MM

*requires moq

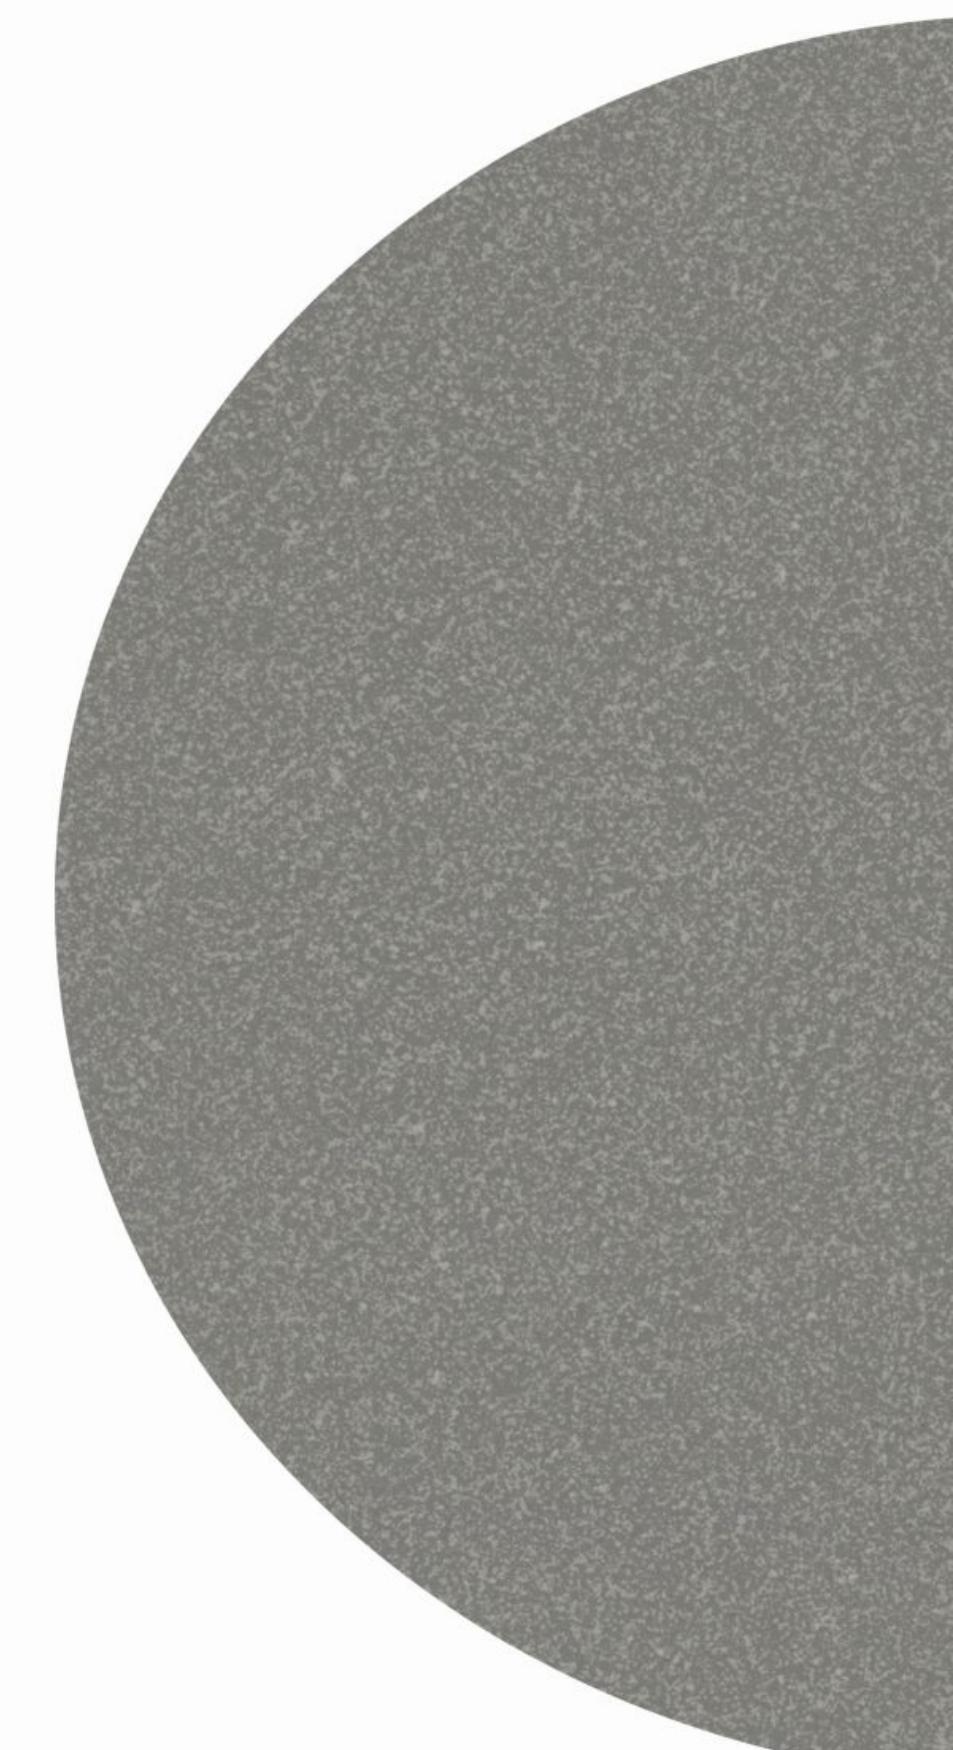



SAHARA

FINISHES:
SM. PL*

SIZES:
300X300*. 600X300*. 600X600. 800X800* MM
SLAB - 1200X600. 1520X640 MM
STEP - 1200X300, 1520X310 MM

*requires moq



Restile
every inch of **imagination**

COSMIC

FINISHES:
SM. PL*

SIZES:
300X300*. 600X300*. 600X600. 800X800* MM
SLAB - 1200X600 MM

*requires moq



ABACUS

FINISHES:
SM, PL*

SIZES:
300X300*, 600X300*, 600X600, 800X800* MM
SLAB - 1200X600 MM

*requires moq





Restile
every inch of **imagination**


EDEN

FINISHES:
SM. PL*

SIZES:
300X300*, 600X300*, 600X600, 800X800* MM
SLAB - 1200X600 MM

*requires moq



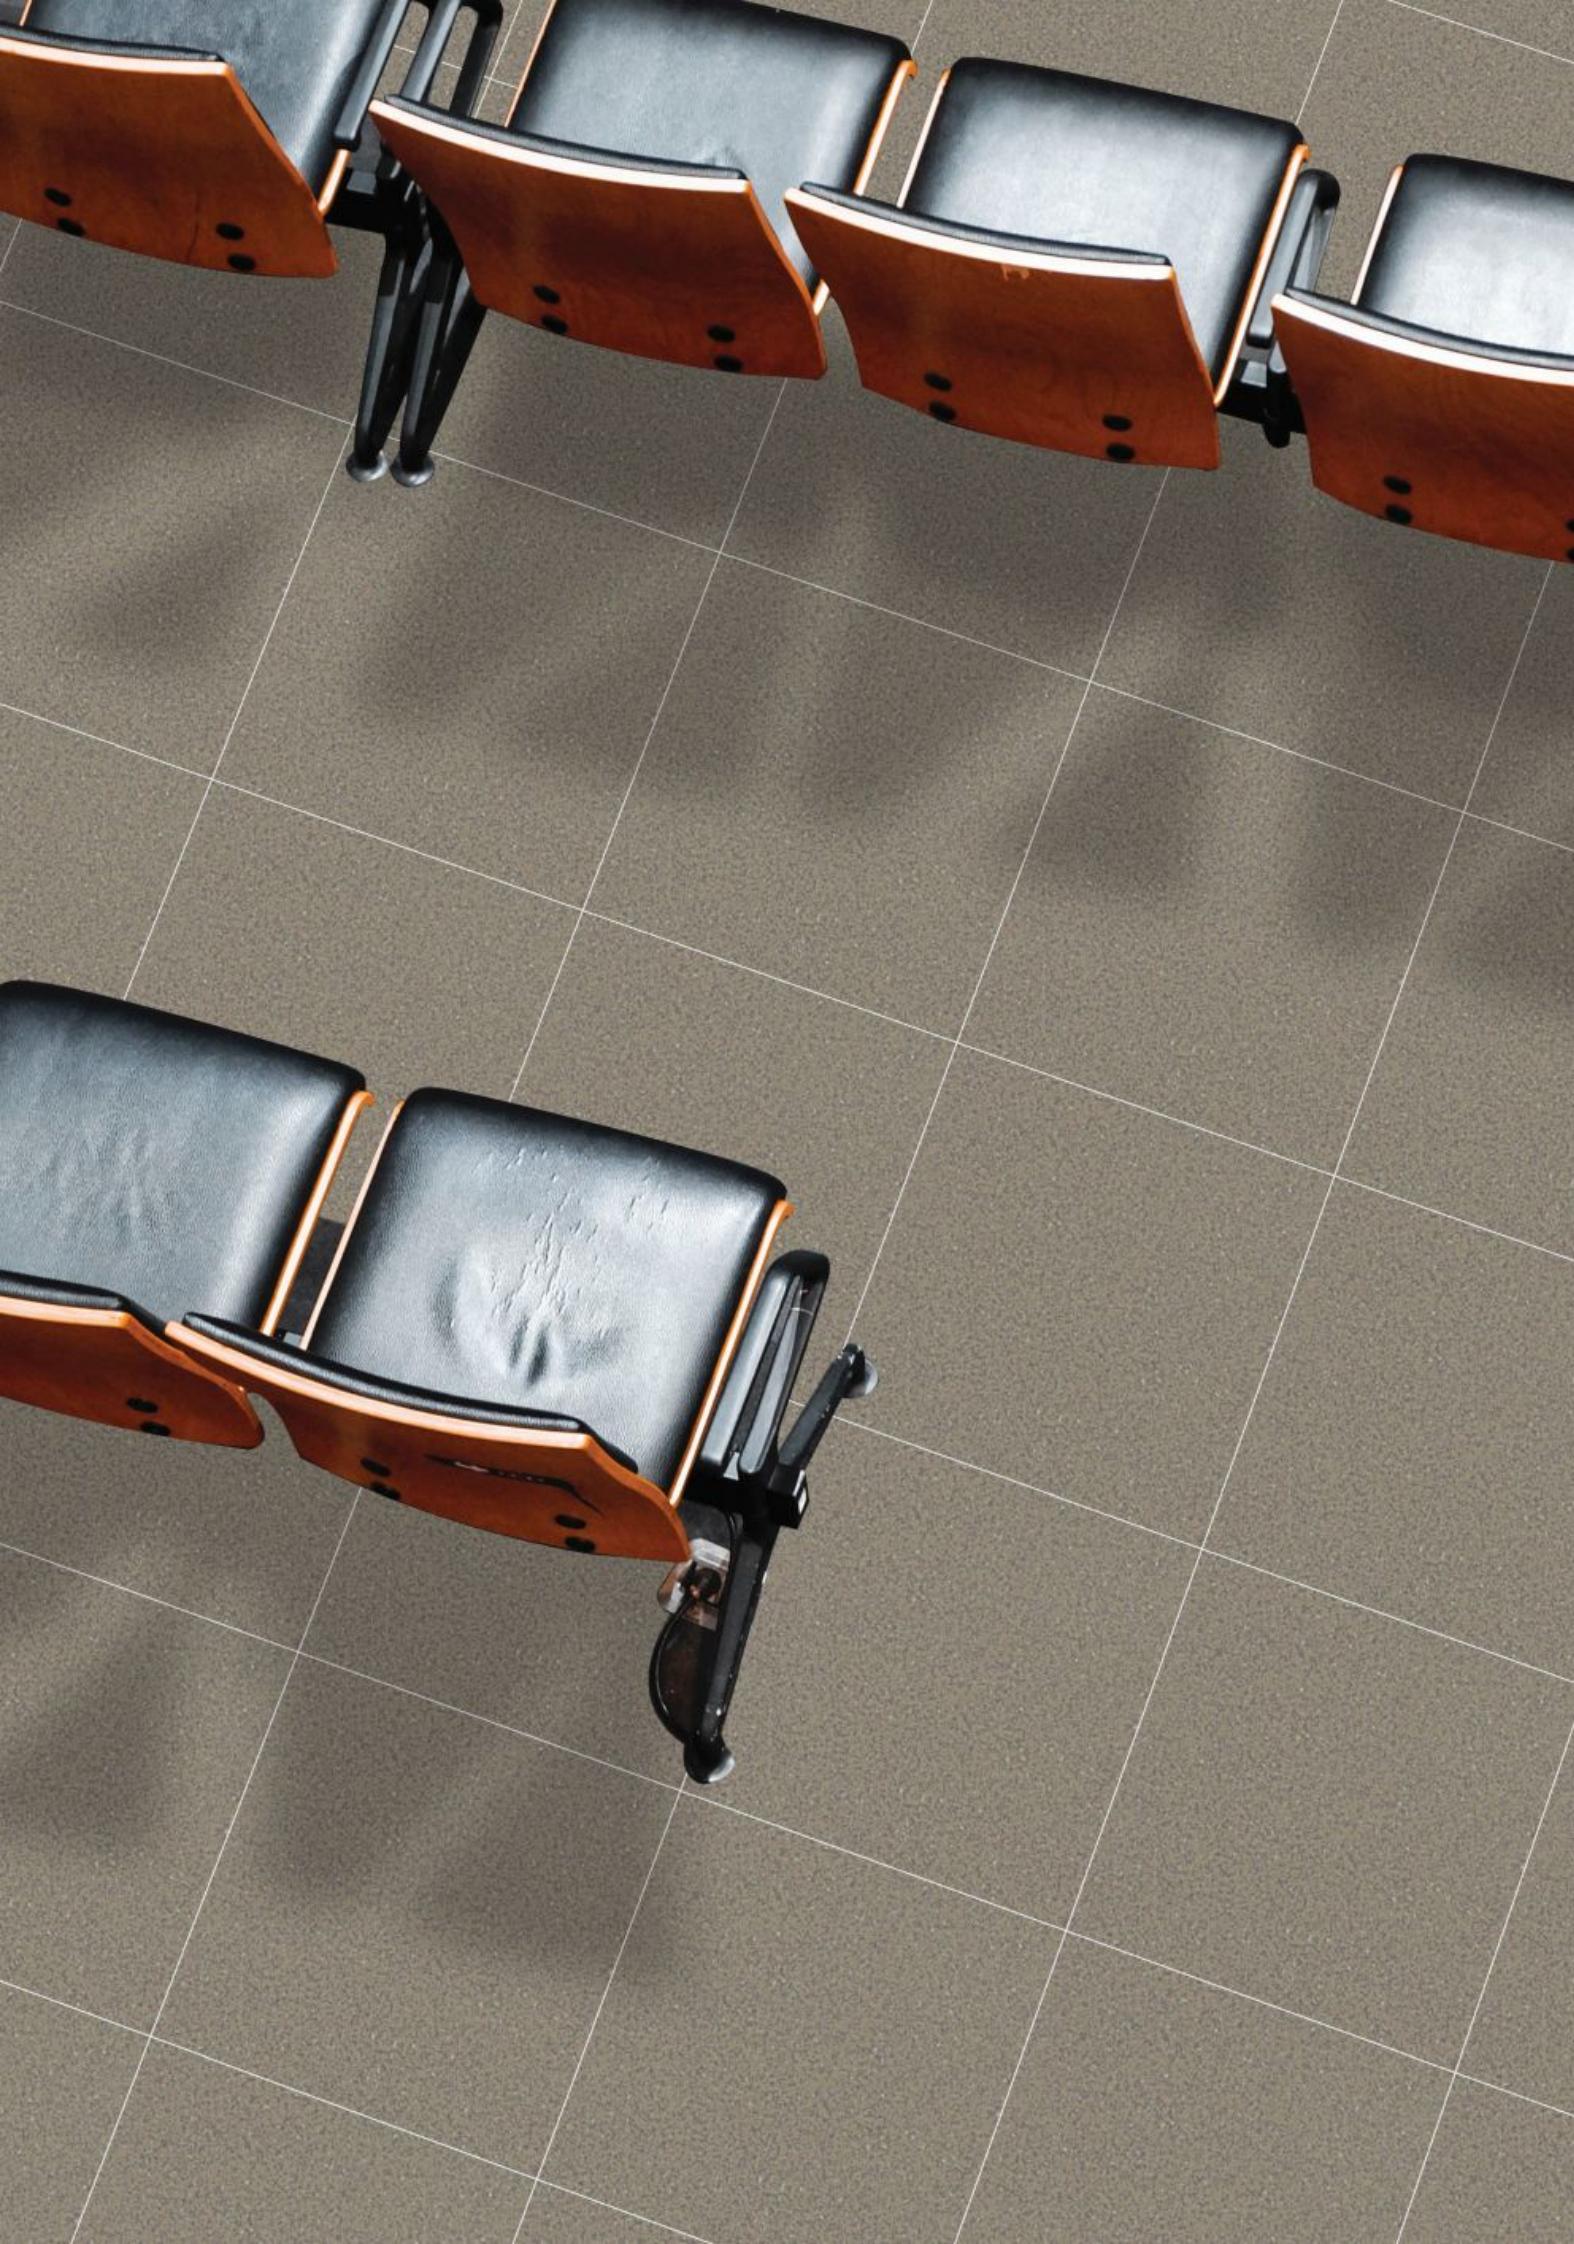

Restile
every inch of **imagination**

CHAMPAGNE

FINISHES:
SM, PL*

SIZES:
600X600, 800X800* MM
SLAB - 1200X600* MM

*requires moq




Restile
every inch of **imagination**

MATRIX

FINISHES:
SM. PL*

SIZES:
300X300*, 600X300*, 600X600, 800X800* MM
SLAB - 1200X600 MM
STEP - 1200X300 MM

*requires moq

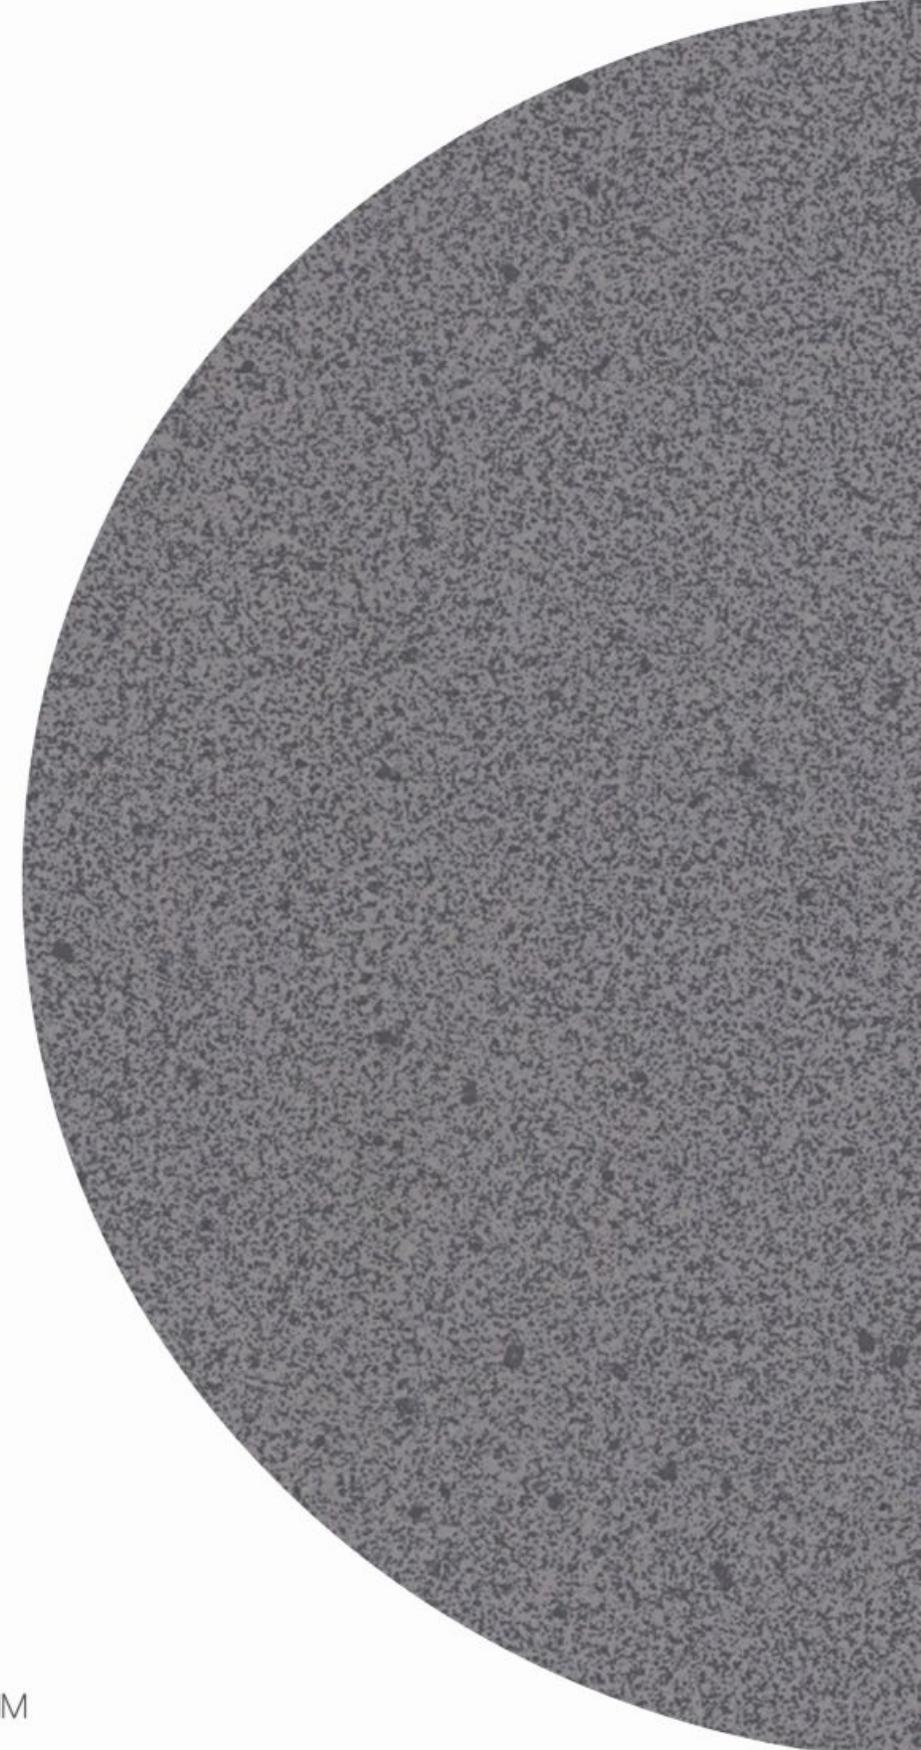



Restile
every inch of **imagination**

LUNA

FINISHES:
SM. PL*

SIZES:
300X300*, 600X300*, 600X600, 800X800* MM
SLAB - 1200X600, 1520X640 MM
STEP - 1200X300, 1520X310 MM

*requires moq






Restile
every inch of **imagination**

CARAMEL

FINISHES:
SM. PL*

SIZES:
300X300*. 600X300*. 600X600. 800X800* MM
SLAB - 1200X600 MM

*requires moq

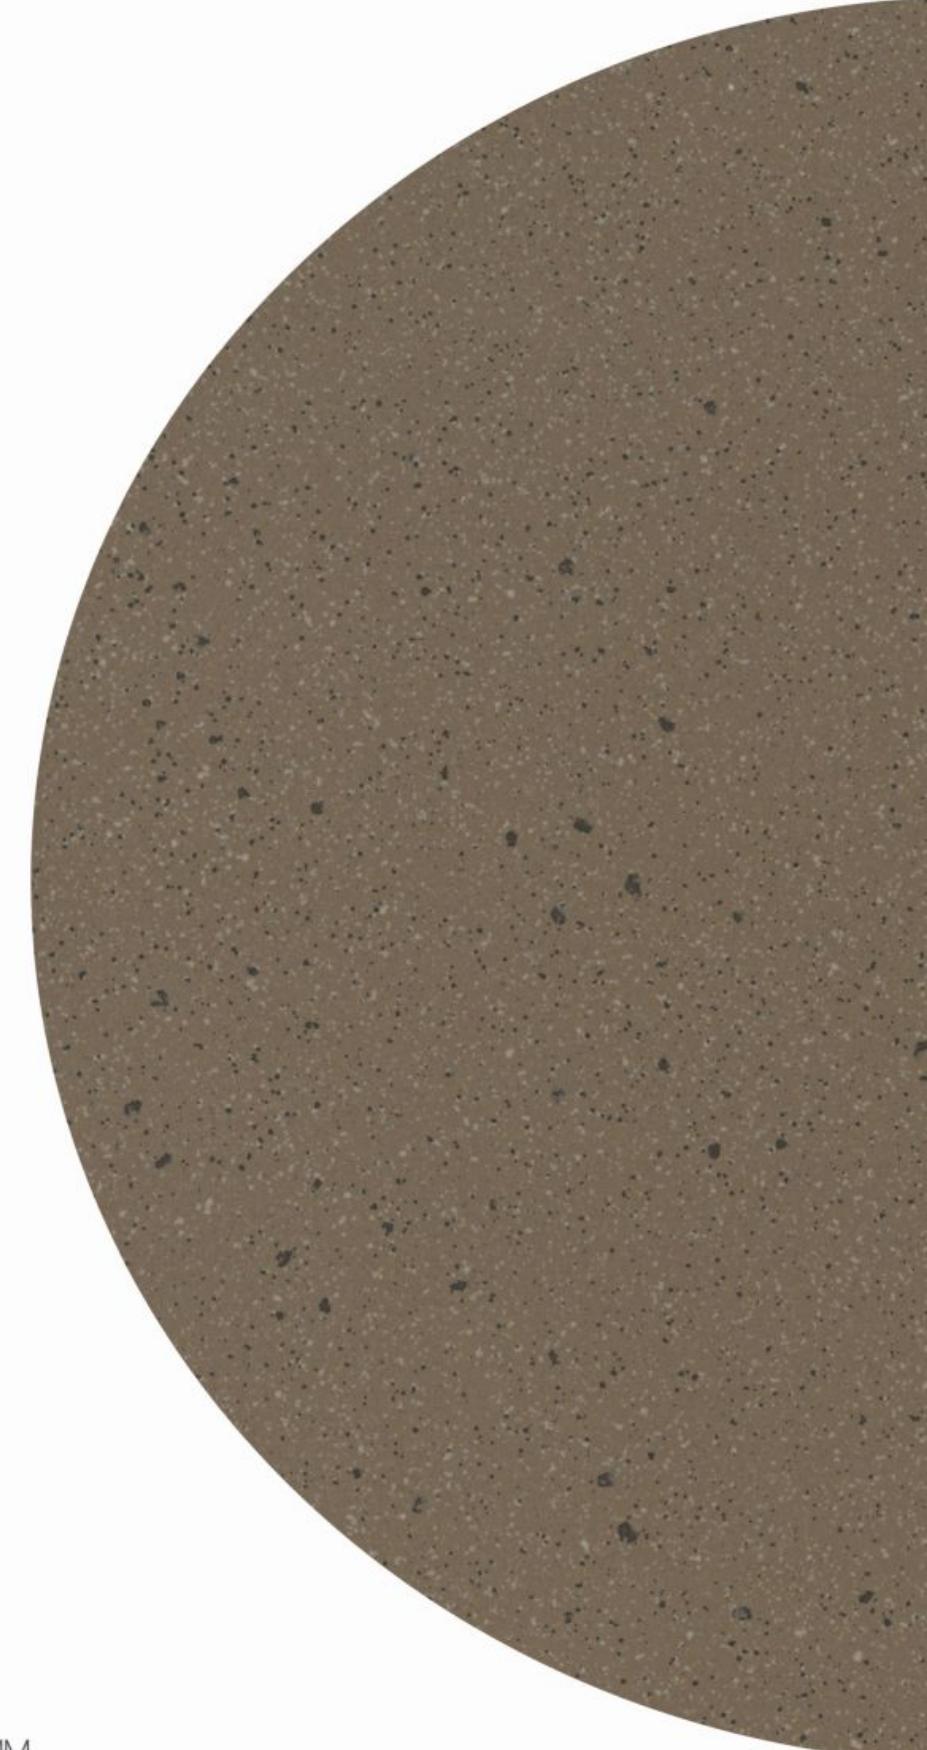




Restile
every inch of **imagination**

CEMENTO

FINISHES:
SM. PL*

SIZES:
300X300*. 600X300*. 600X600. 800X800* MM
SLAB - 1200X600 MM

*requires moq

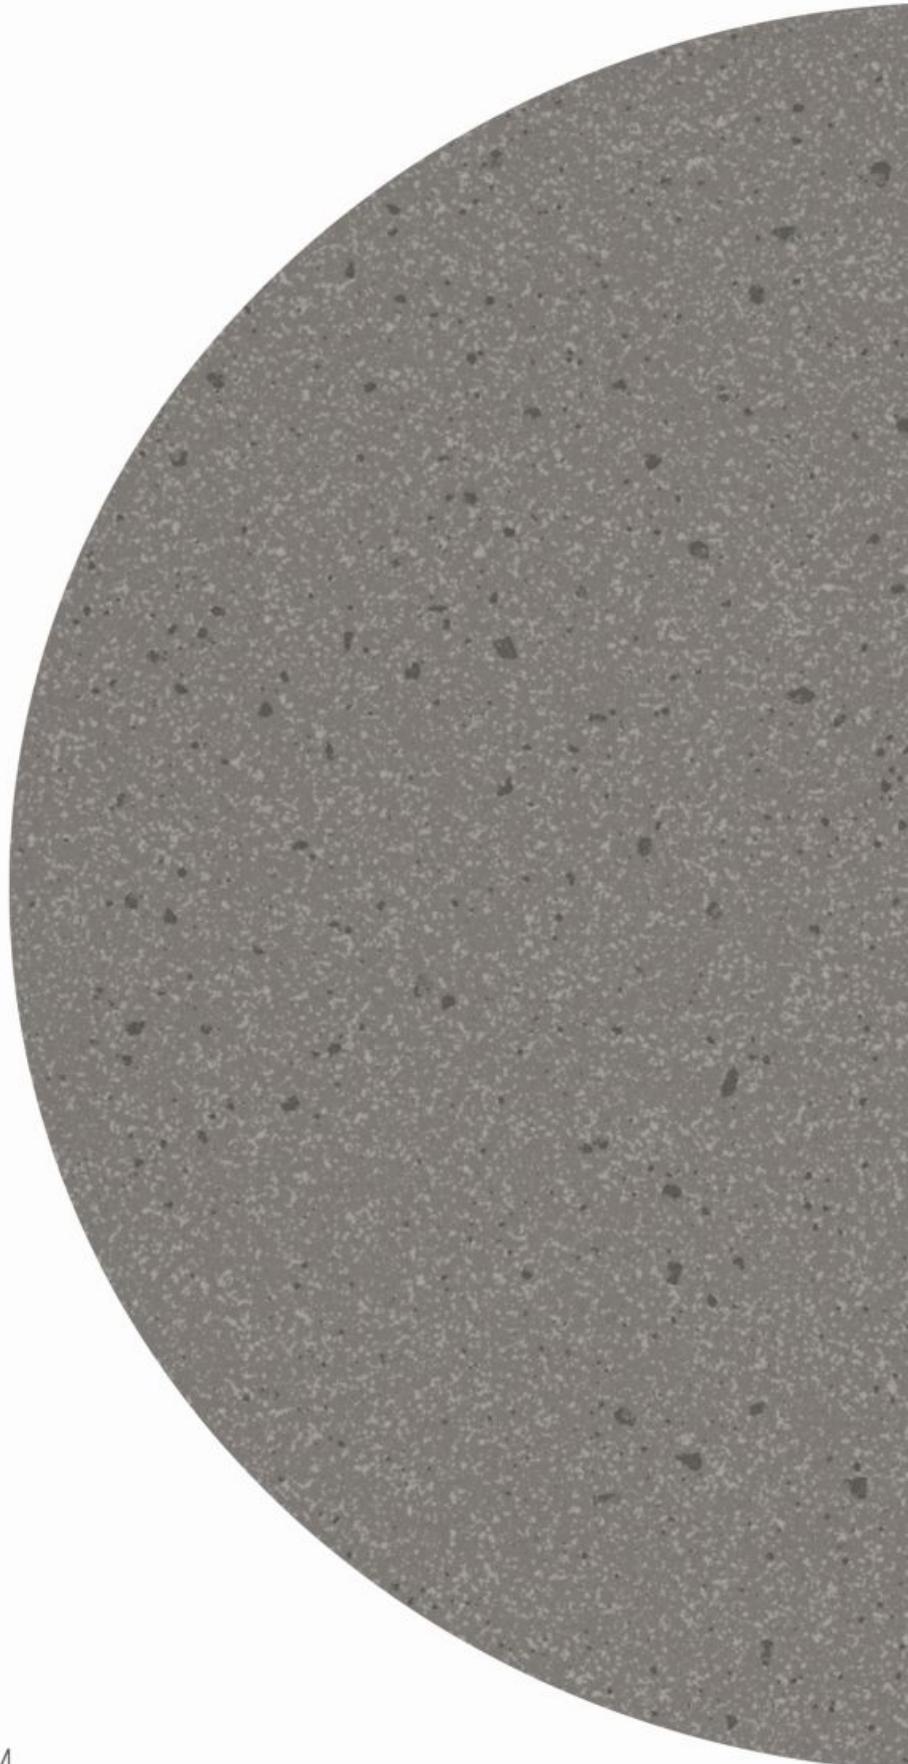

BRINGING BACK THE GOOD OLD DAYS!



CHIPS COLLECTION

This collection brings back memories of the beautiful vintage style flooring yet with a modern touch and various color ranges and chips sizes. The Terrazzo flooring not only brings the vintage feels, but our tiles made with modern technology makes it perfect for any surface or any space.



FULL
BODY
COLOR

THRU
BODY
DESIGNS

NATURAL
PRESS
DESIGNS

UN-
GLAZED
SURFACE

ANTI-
SLIP
R>10

TECHNICAL
GRANITO
PORCELAIN

HIGH
TRANSIT

< 0.08
WATER
ABSORPTION

ACID
ALKALI
RESISTANT

EASY
TO
CLEAN



 **Restile**
every inch of **imagination**

MARMO

FINISHES:
SM, PL*

SIZES:
300X300 MM*
600X300 MM*
600X600 MM
800X800 MM*

SLAB - 1200X600 MM

*requires mod



 **Restile**
every inch of **imagination**

AMAZON



FINISHES:
SM, PL*

SIZES:

300X300 MM*
600X300 MM*
600X600 MM
800X800 MM*

SLAB - 1200X600 MM

*requires mod

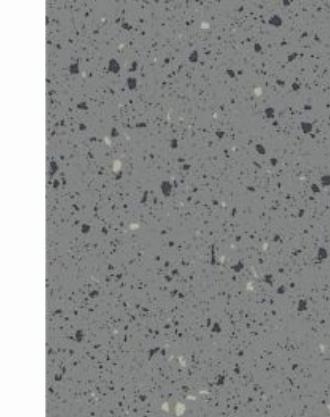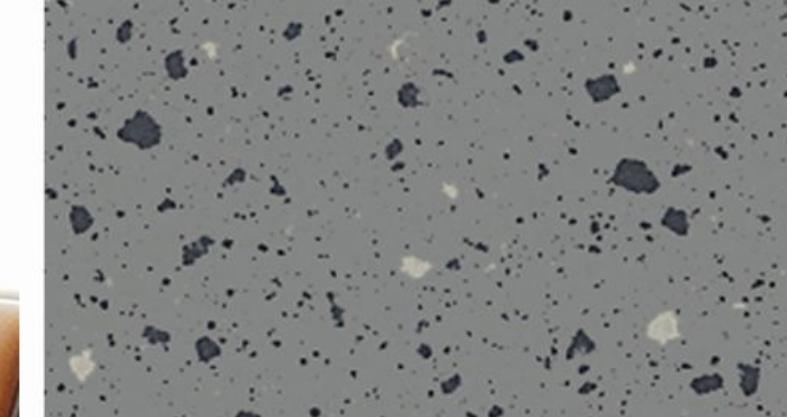

 **Restile**
every inch of **imagination**

BAZAAR

FINISHES:
SM. PL*



SIZES:

300X300 MM*
600X300 MM*
600X600 MM
800X800 MM*

SLAB - 1200X600 MM
SLAB - 1520X640 MM*

STEP - 1200X300 MM
STEP - 1520X310 MM*

*requires mod

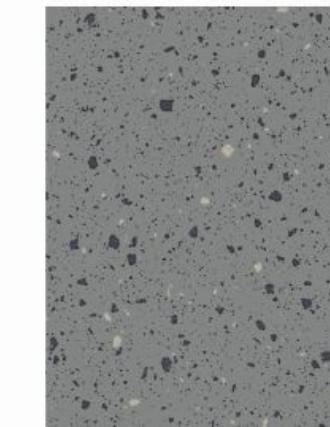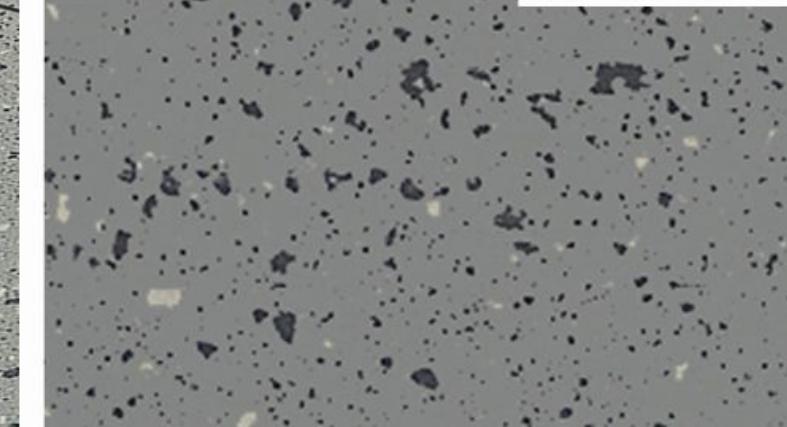



 **Restile**
every inch of **imagination**

ICONIC

FINISHES:
SM. PL*

SIZES:
300X300 MM*
600X300 MM*
600X600 MM
800X800 MM*

SLAB - 1200X600 MM
SLAB - 1520X640 MM*

STEP - 1200X300 MM
STEP - 1520X310 MM*

*requires mod



 **Restile**
every inch of **imagination**

MIST

FINISHES:
SM. PL*


SIZES:

300X300 MM*
600X300 MM*
600X600 MM
800X800 MM*

SLAB - 1200X600 MM
SLAB - 1520X640 MM*

STEP - 1200X300 MM
STEP - 1520X310 MM*

*requires mod

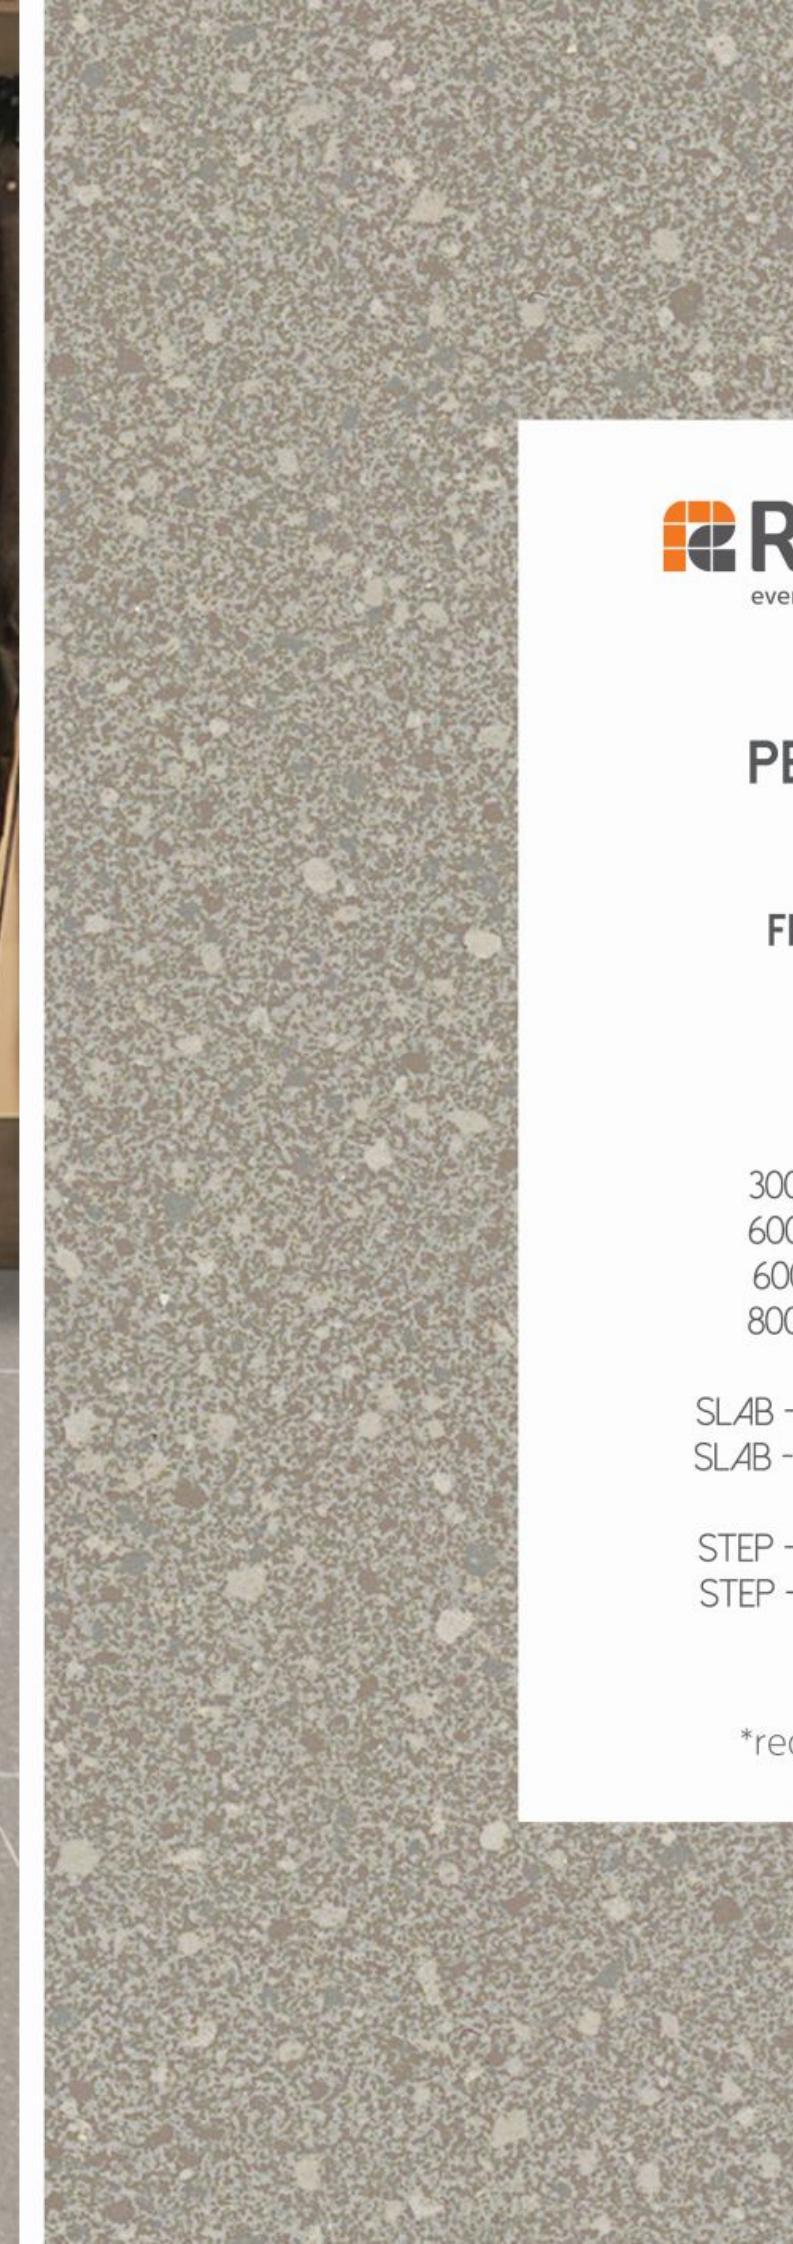

 **Restile**
every inch of **imagination**

PEBBLES


FINISHES:
SM. PL*


SIZES:
300X300 MM*
600X300 MM*
600X600 MM
800X800 MM*

SLAB - 1200X600 MM
SLAB - 1520X640 MM*

STEP - 1200X300 MM
STEP - 1520X310 MM*

*requires mod

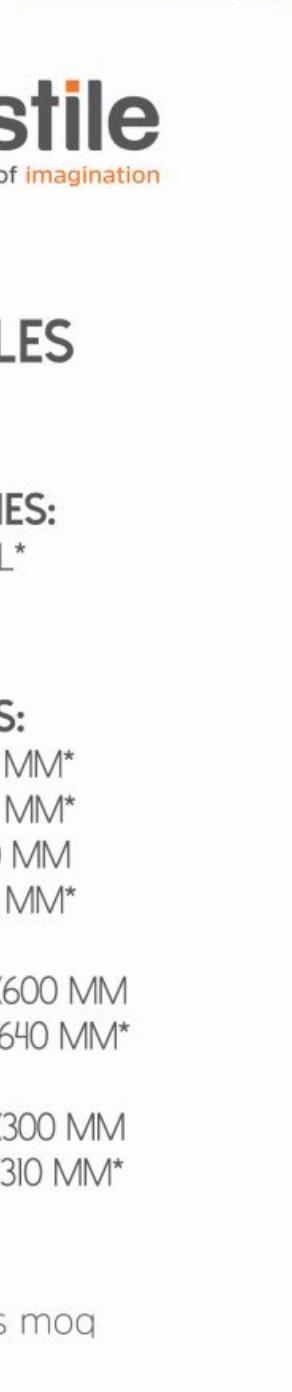

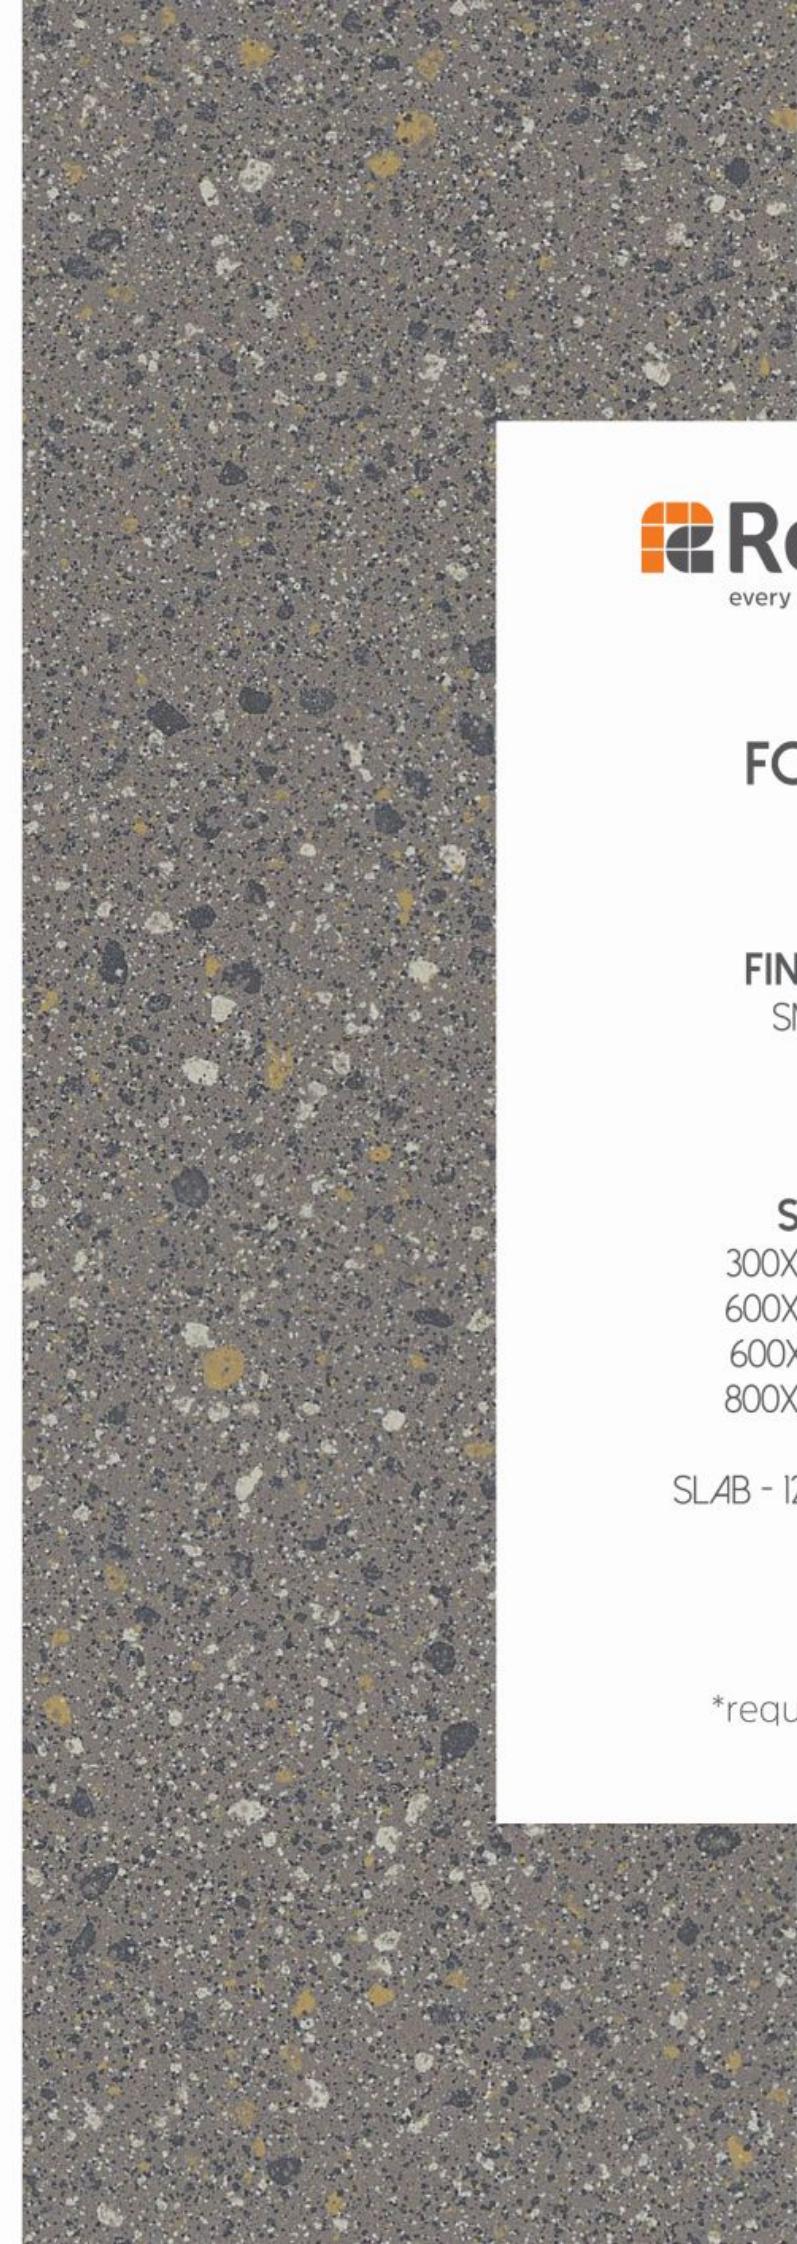

 **Restile**
every inch of **imagination**


FOSSIL



FINISHES:
SM, PL*

SIZES:
300X300 MM*
600X300 MM*
600X600 MM
800X800 MM*

SLAB - 1200X600 MM

*requires mod

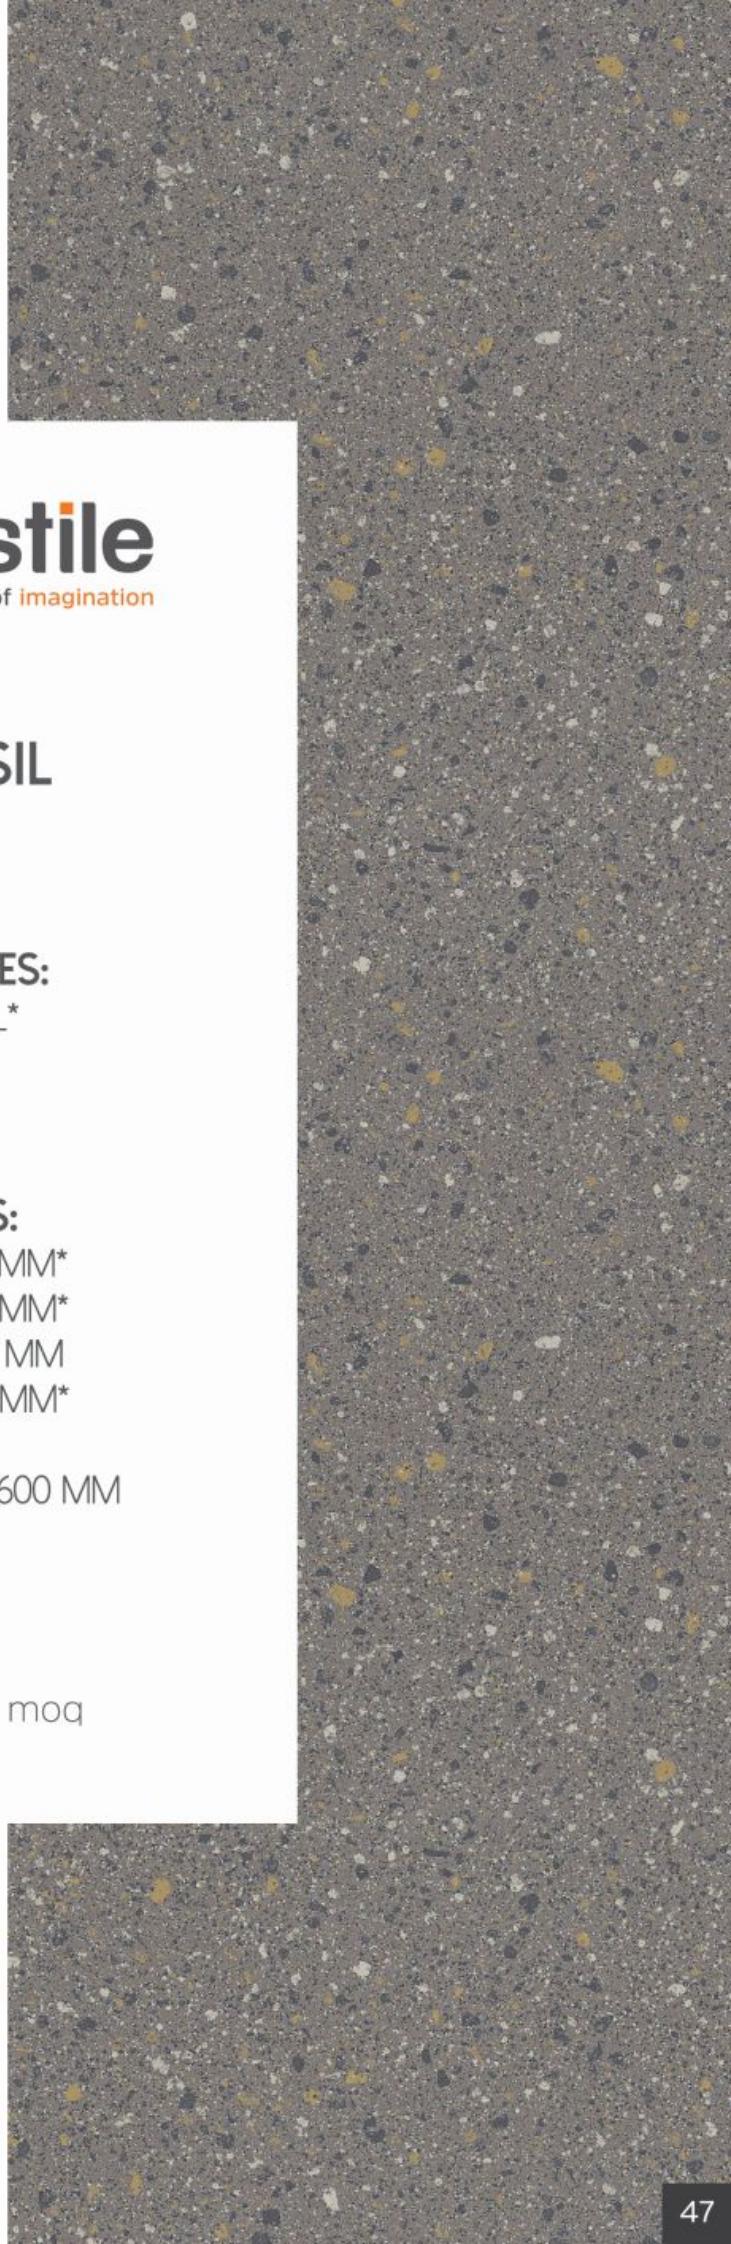

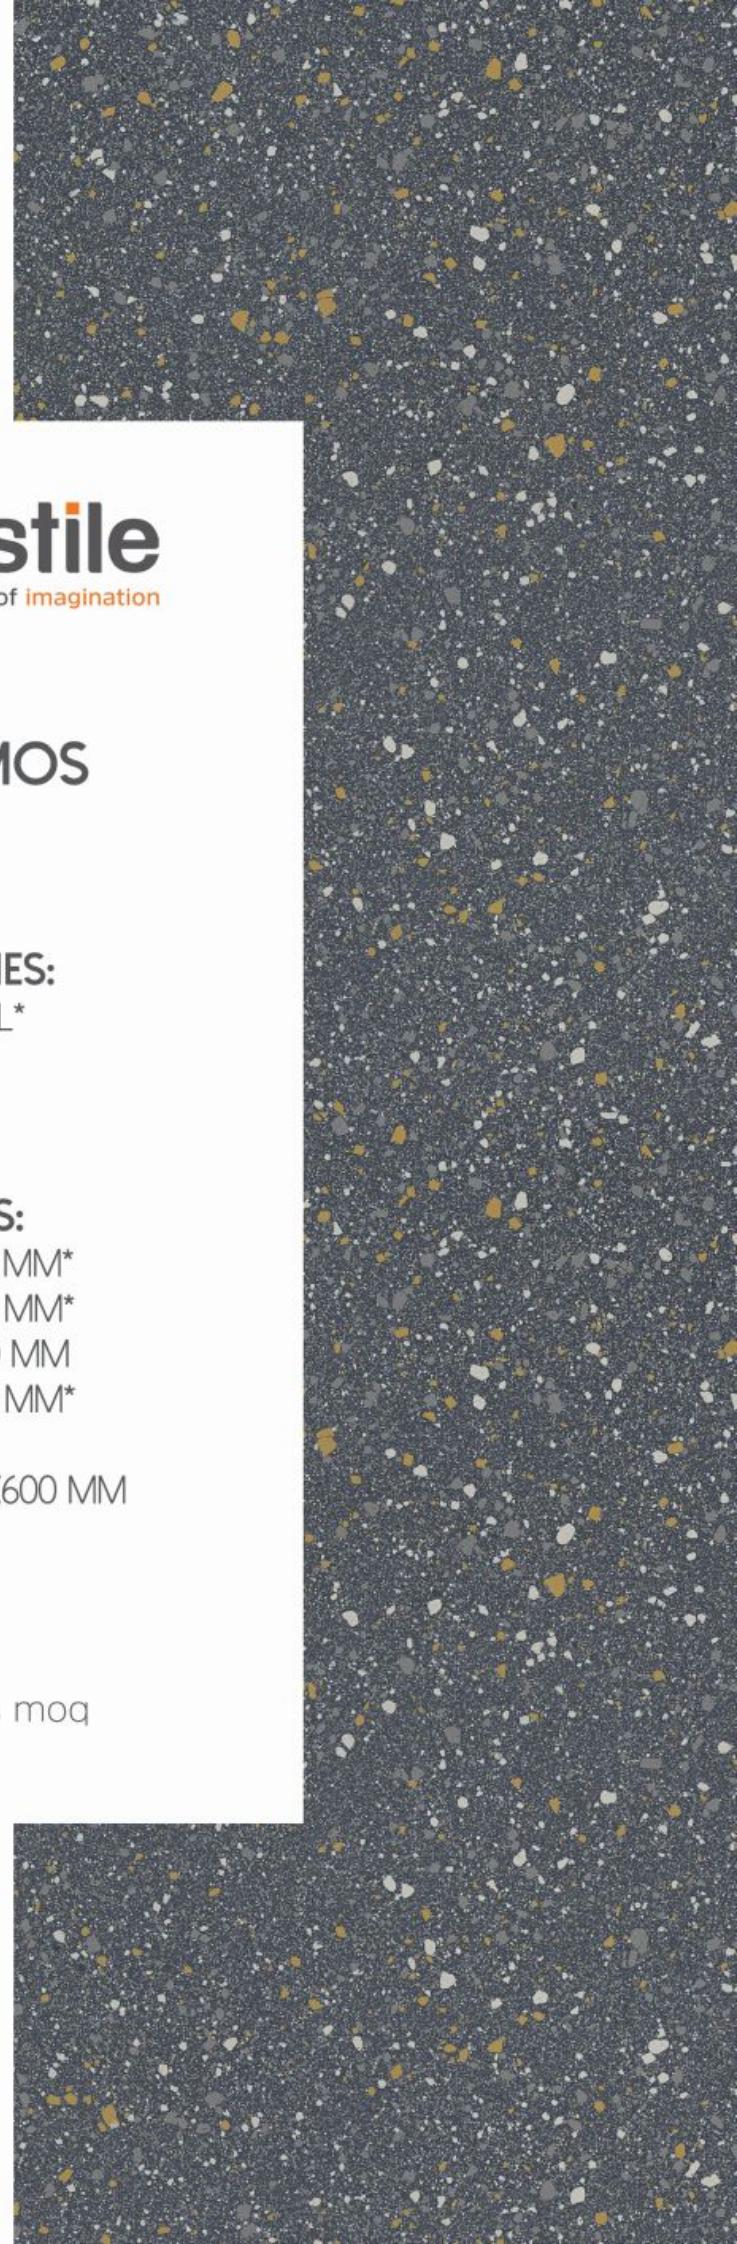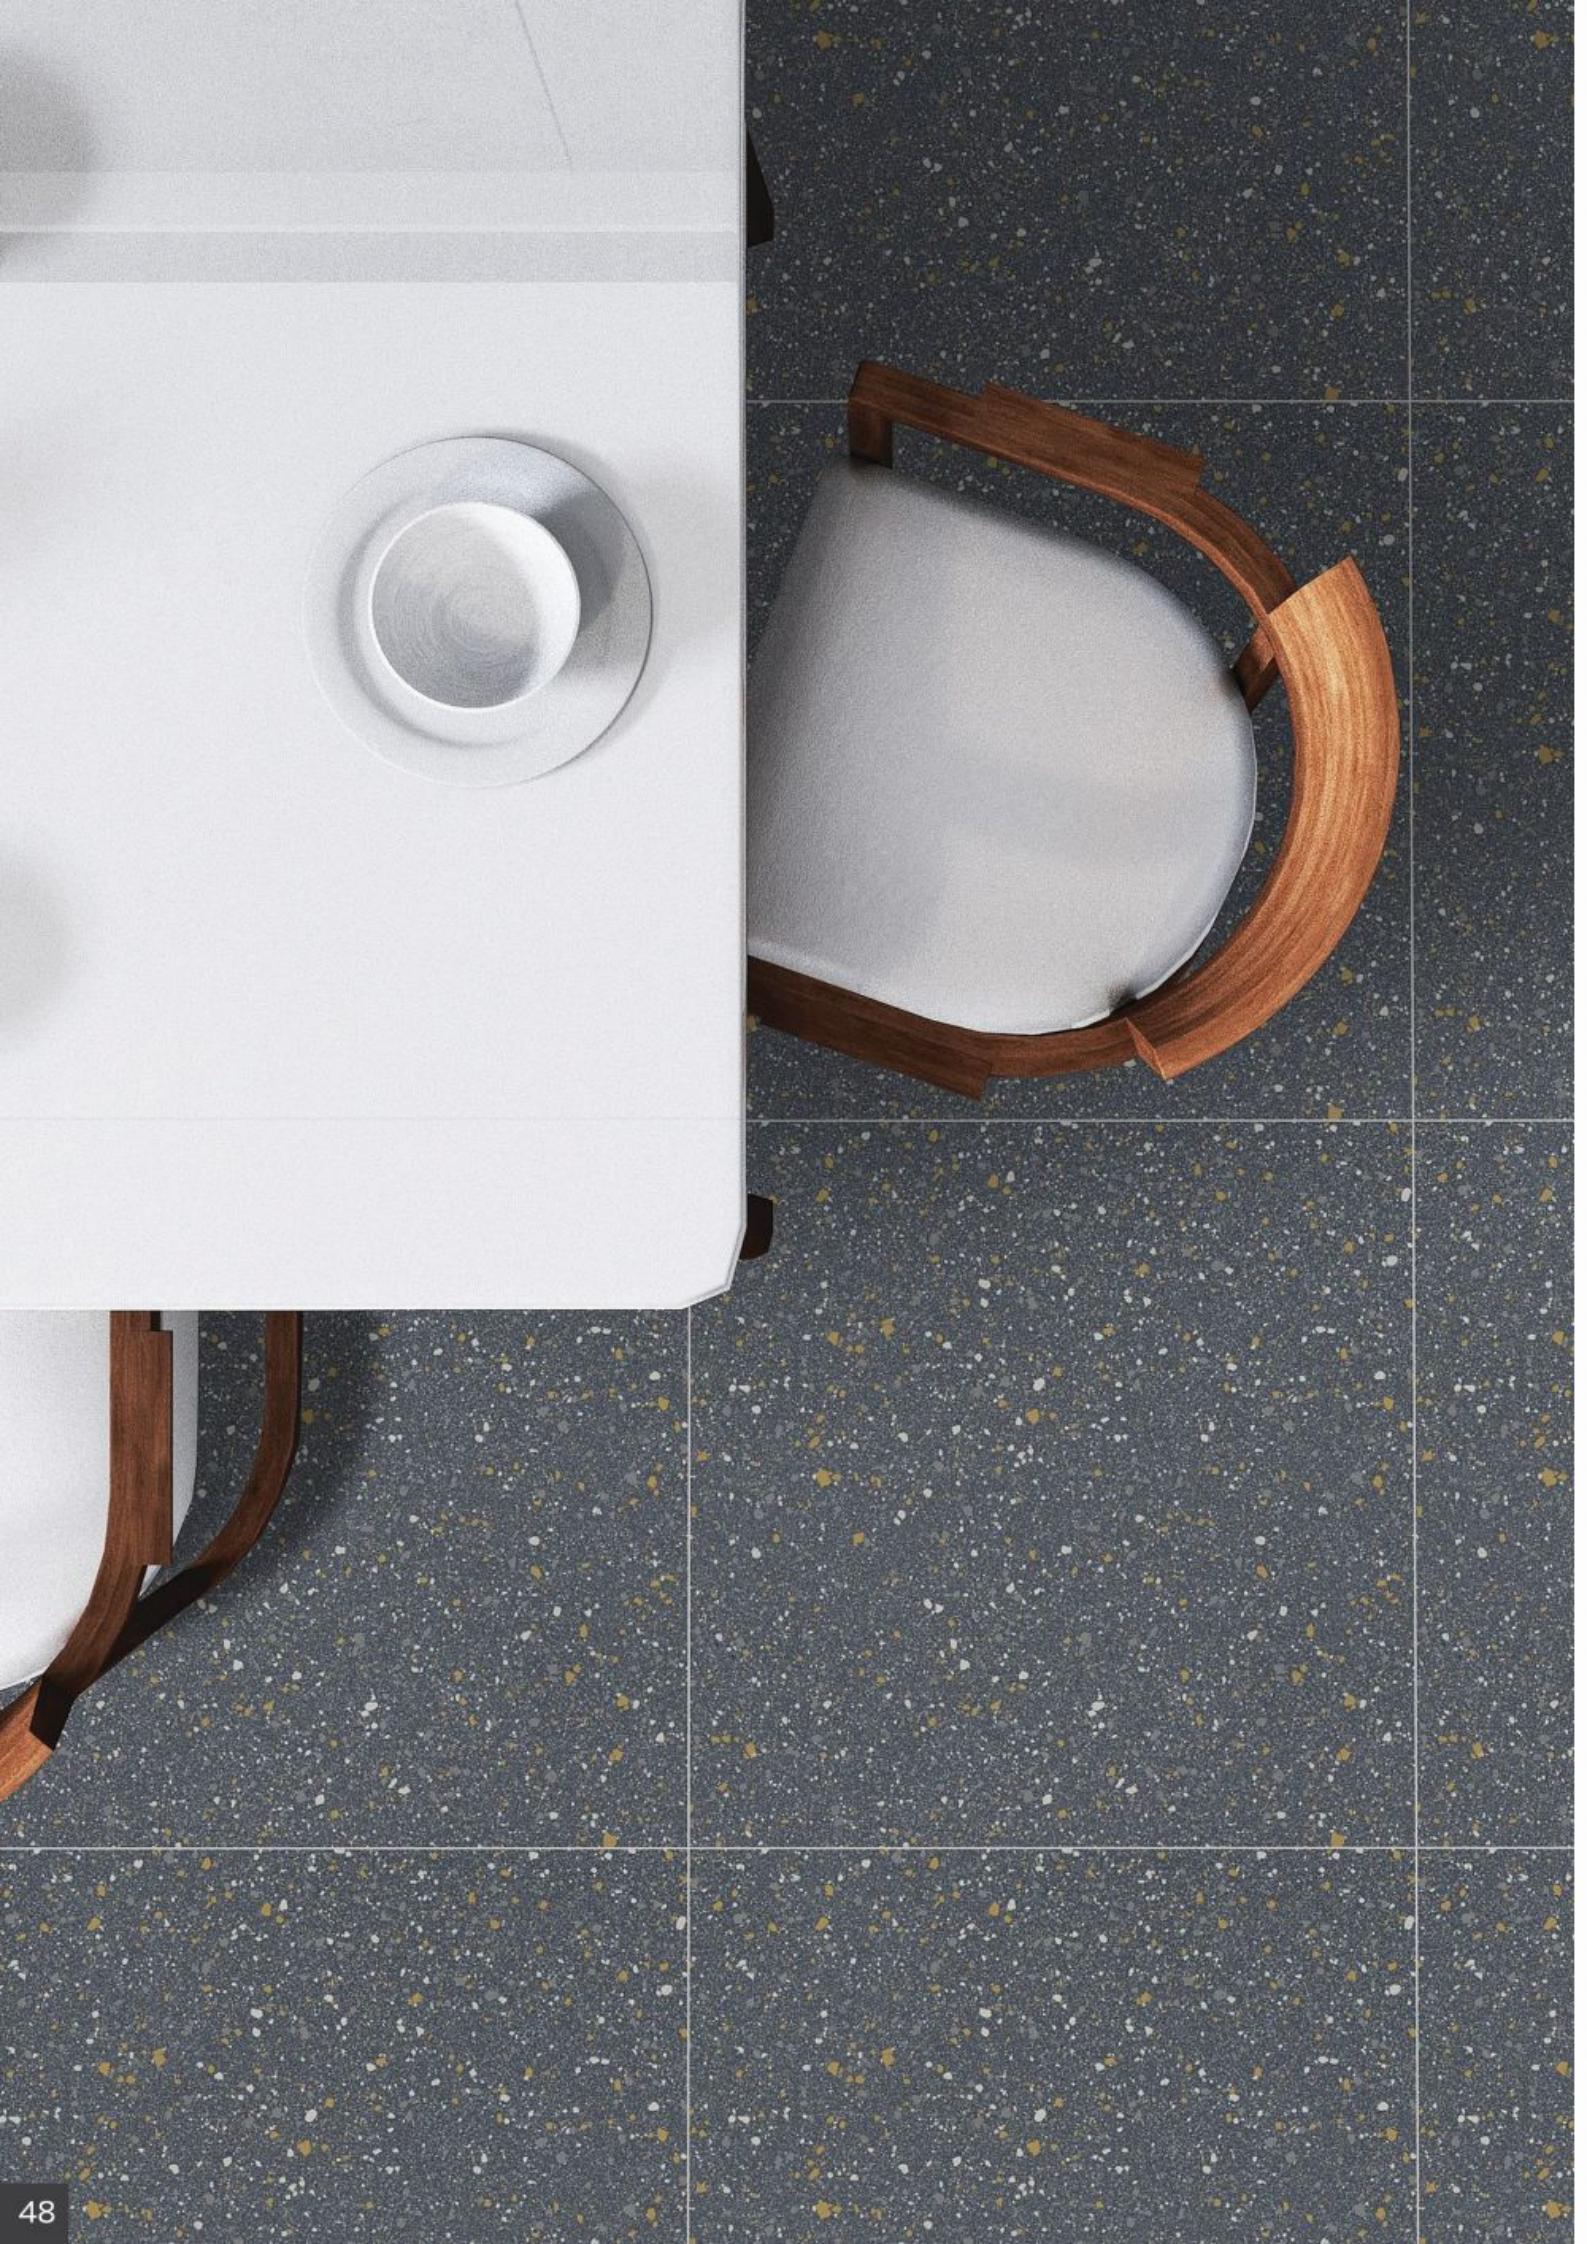

 **Restile**
every inch of **imagination**


COSMOS

FINISHES:
SM, PL*

SIZES:
300X300 MM*
600X300 MM*
600X600 MM
800X800 MM*

SLAB - 1200X600 MM

*requires mod

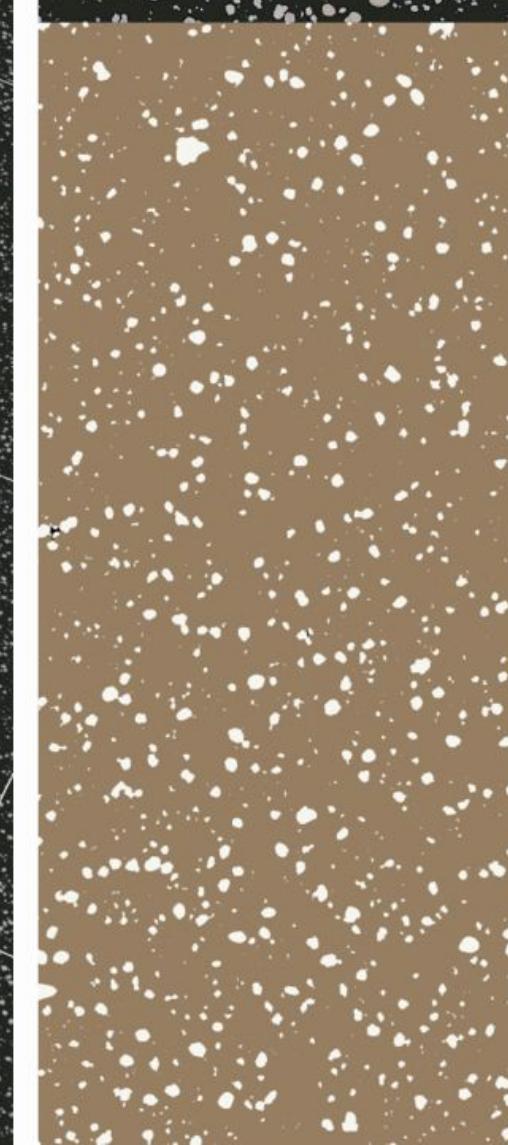

 **Restile**
every inch of **imagination**

POLKA -

BLACK
TRENDY
BROWN
GREEN


FINISHES:
PL

SIZES:
600X600 MM
SLAB - 1200X600 MM

*requires mod



CLOSEST TO ROCK ANTI-SKID NATURAL FINISH

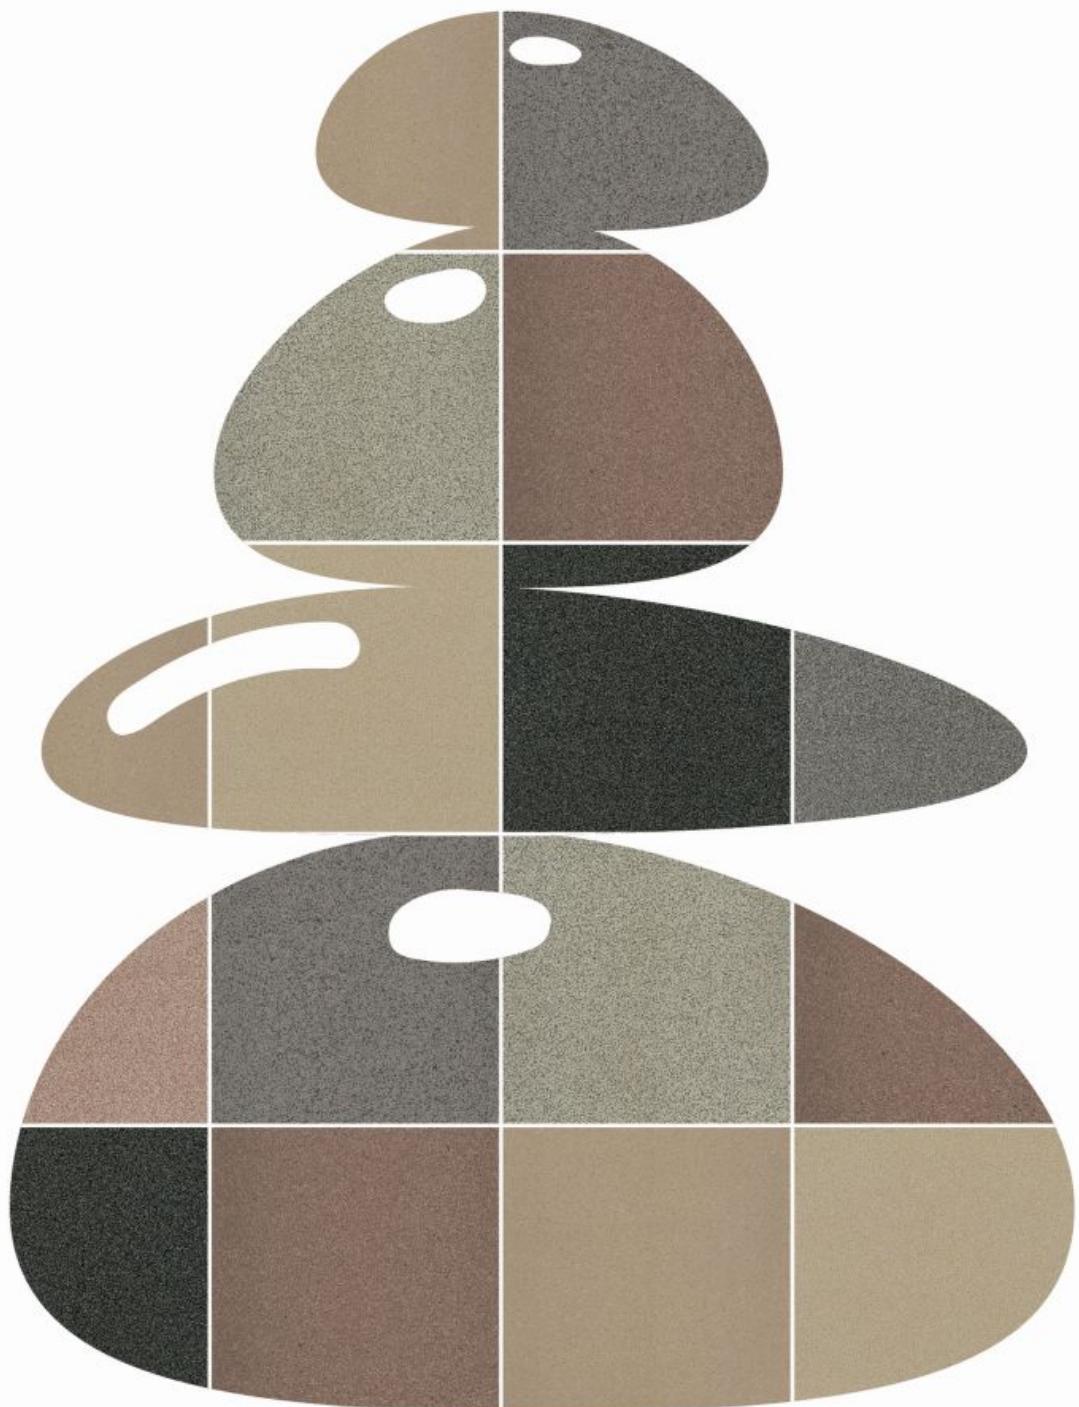

MAKERS COLLECTION


Restile, known for its speciality in Full Body Homogeneous tiles, now raises the bar with its TRUE ANTI-SKID finish. with supreme strength, and a true leader in the anti-skid quotient, this collection captures the roughness and beauty of natural stones, making it the perfect choice to use in any wet areas.



- | | | | | |
|-----------------|-------------------|-------------------|----------------|-----------------------------|
| FULL BODY COLOR | THRU BODY DESIGNS | UN-GLAZED SURFACE | ANTI-SLIP R>11 | TECHNICAL GRANITO PORCELAIN |
|-----------------|-------------------|-------------------|----------------|-----------------------------|



TRUE ANTI-SKID

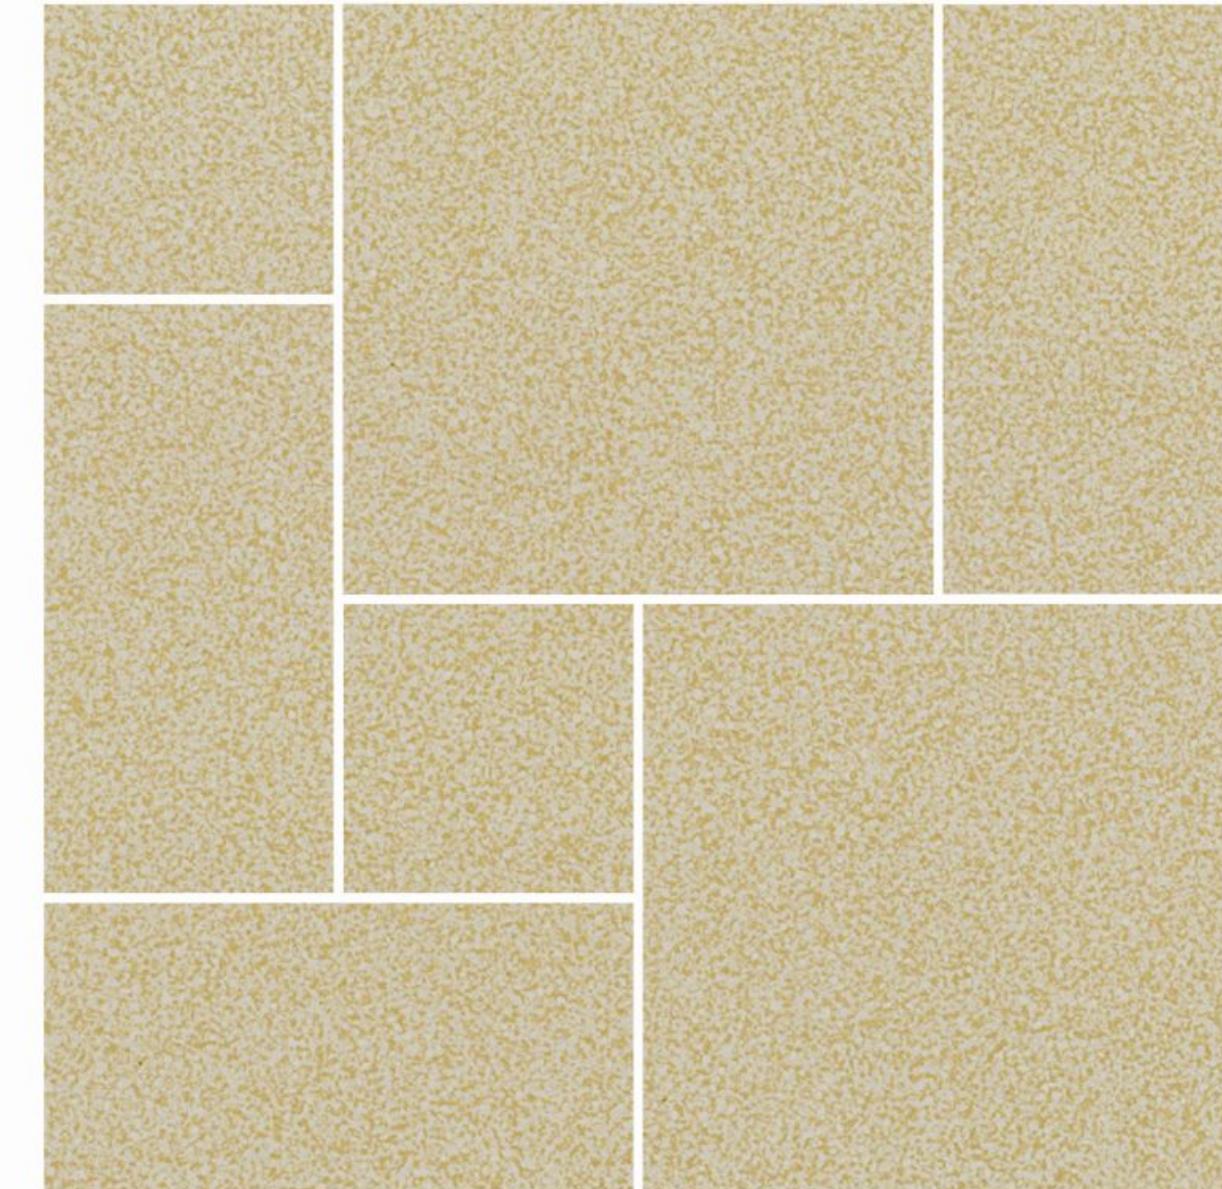

SANDY BEIGE

R>11, V2

FINISH:

AS - SANDY

SIZES:

300X300, 600X300, 600X600 MM
SLAB - 1200X600* MM
STEP - 1200X300* MM

*requires moq



TRUE ANTI-SKID



SANDY RED

R>11, V2

FINISH:

AS - SANDY

SIZES:

300X300, 600X300, 600X600 MM


SLAB - 1200X600* MM

STEP - 1200X300* MM

*requires moq



TRUE ANTI-SKID

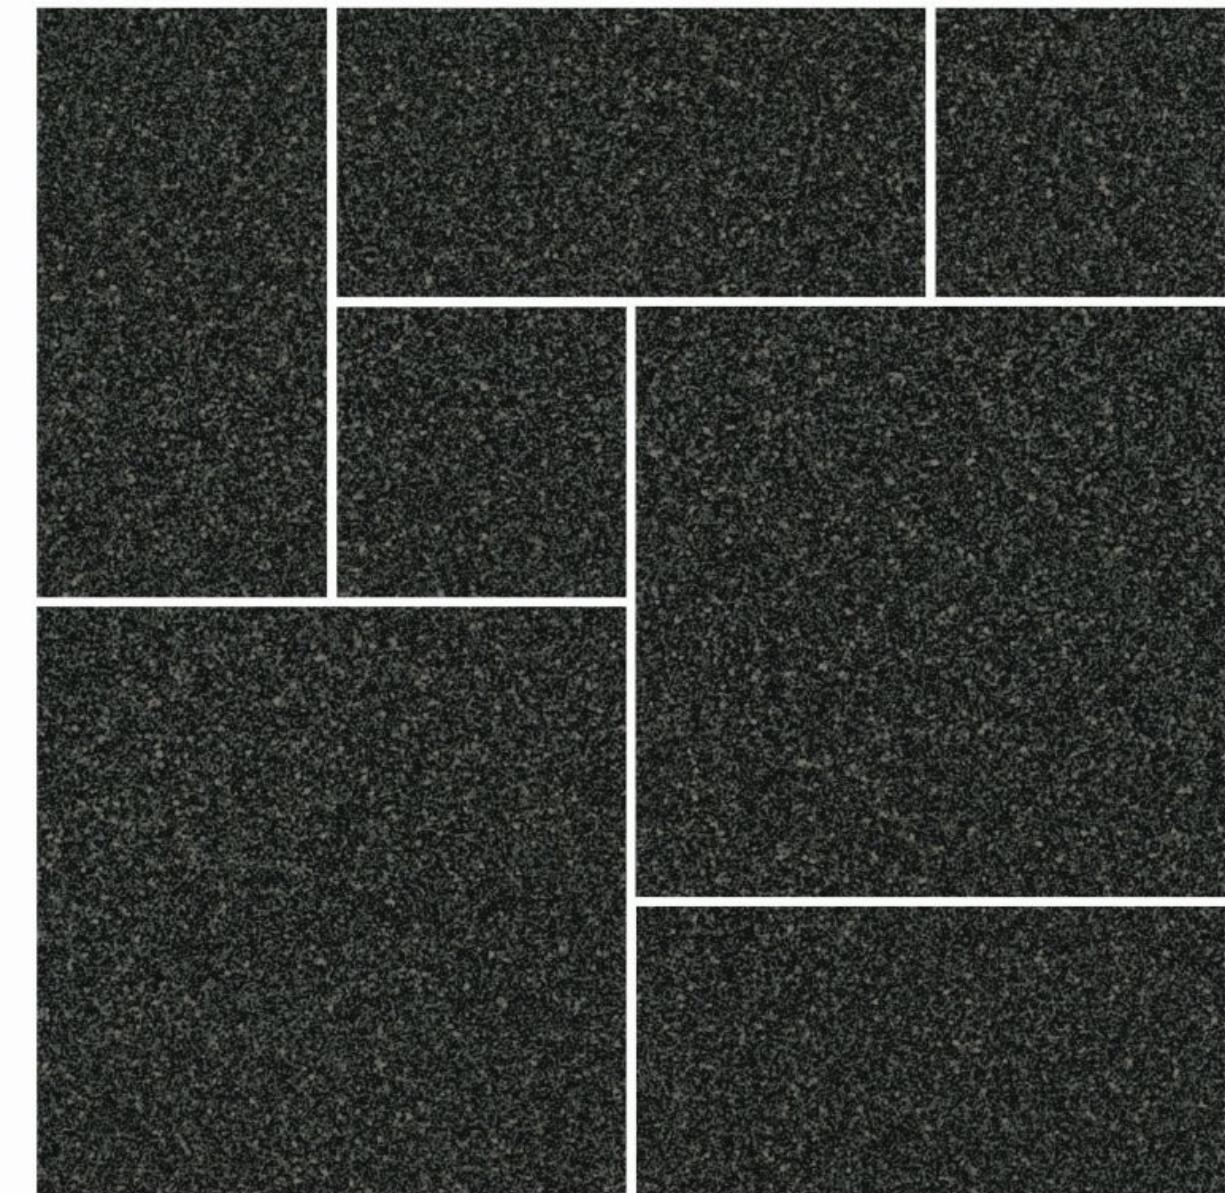

SANDY BLACK

R>11, V2

FINISH:

AS - SANDY


SIZES:

300X300, 600X300, 600X600 MM
SLAB - 1200X600* MM
STEP - 1200X300* MM

*requires moq



TRUE ANTI-SKID

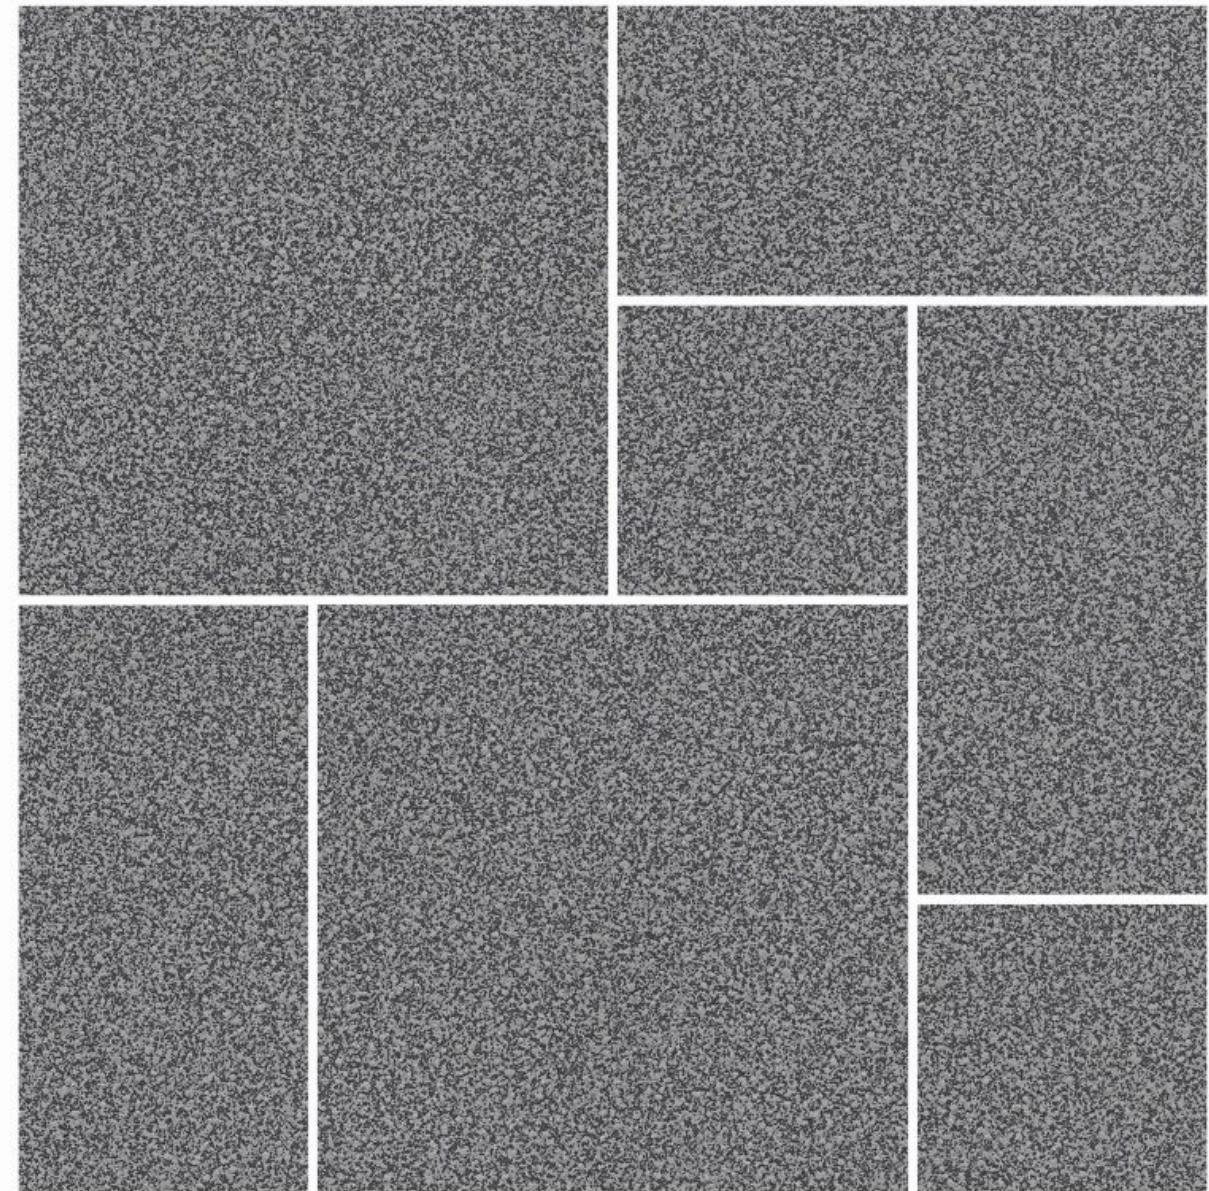

SANDY GREY

R>11, V2

FINISH:

AS - SANDY

SIZES:

300X300, 600X300, 600X600 MM


SLAB - 1200X600 MM

STEP - 1200X300* MM

*requires moq



TRUE ANTI-SKID

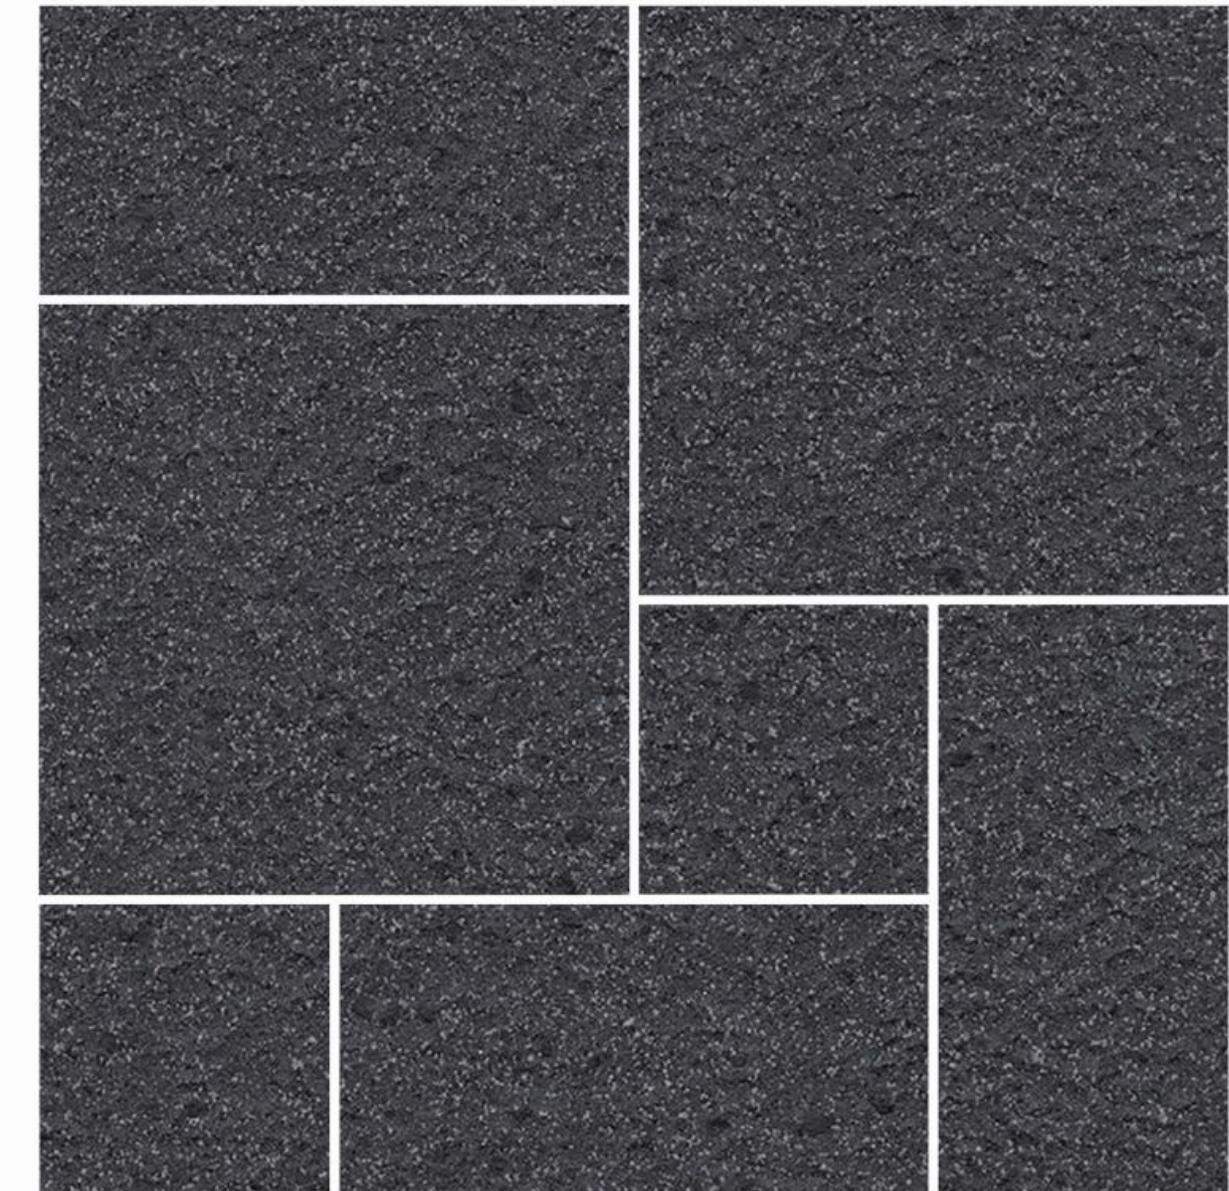

FLAMED ICONIC

R>12, V2

FINISH:

AS - FLAMED


SIZES:

300X300*, 600X300*, 600X600 MM
SLAB - 1200X600* MM

*requires moq



TRUE ANTI-SKID

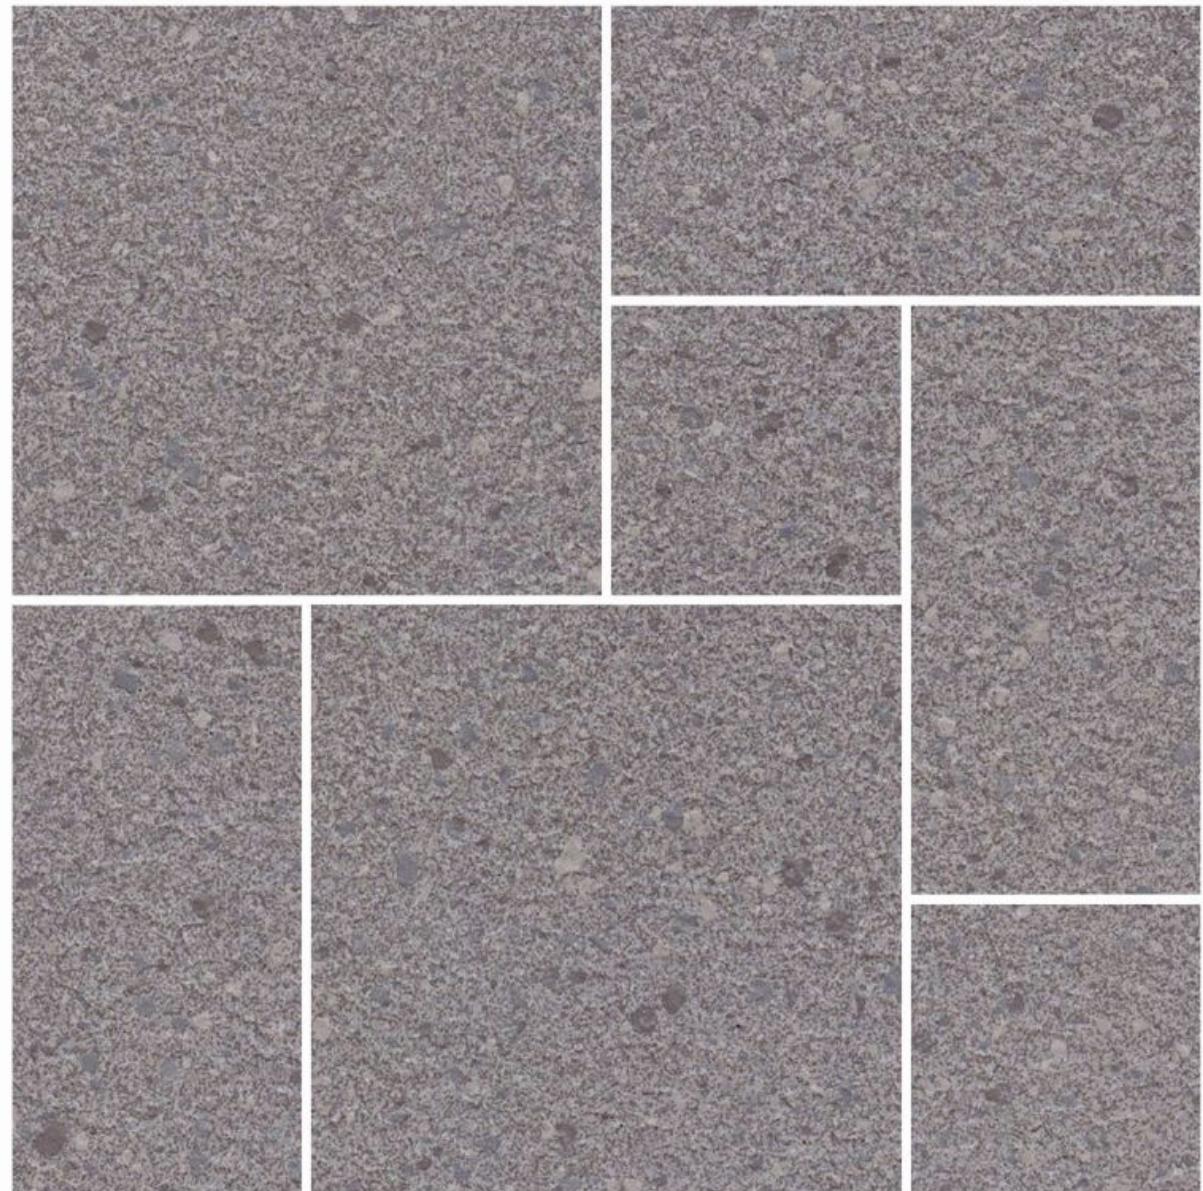


FLAMED PEBBLES

R>12, V2

FINISH:
AS - FLAMED

SIZES:
300X300*, 600X300*, 600X600 MM
SLAB - 1200X600* MM

*requires moq

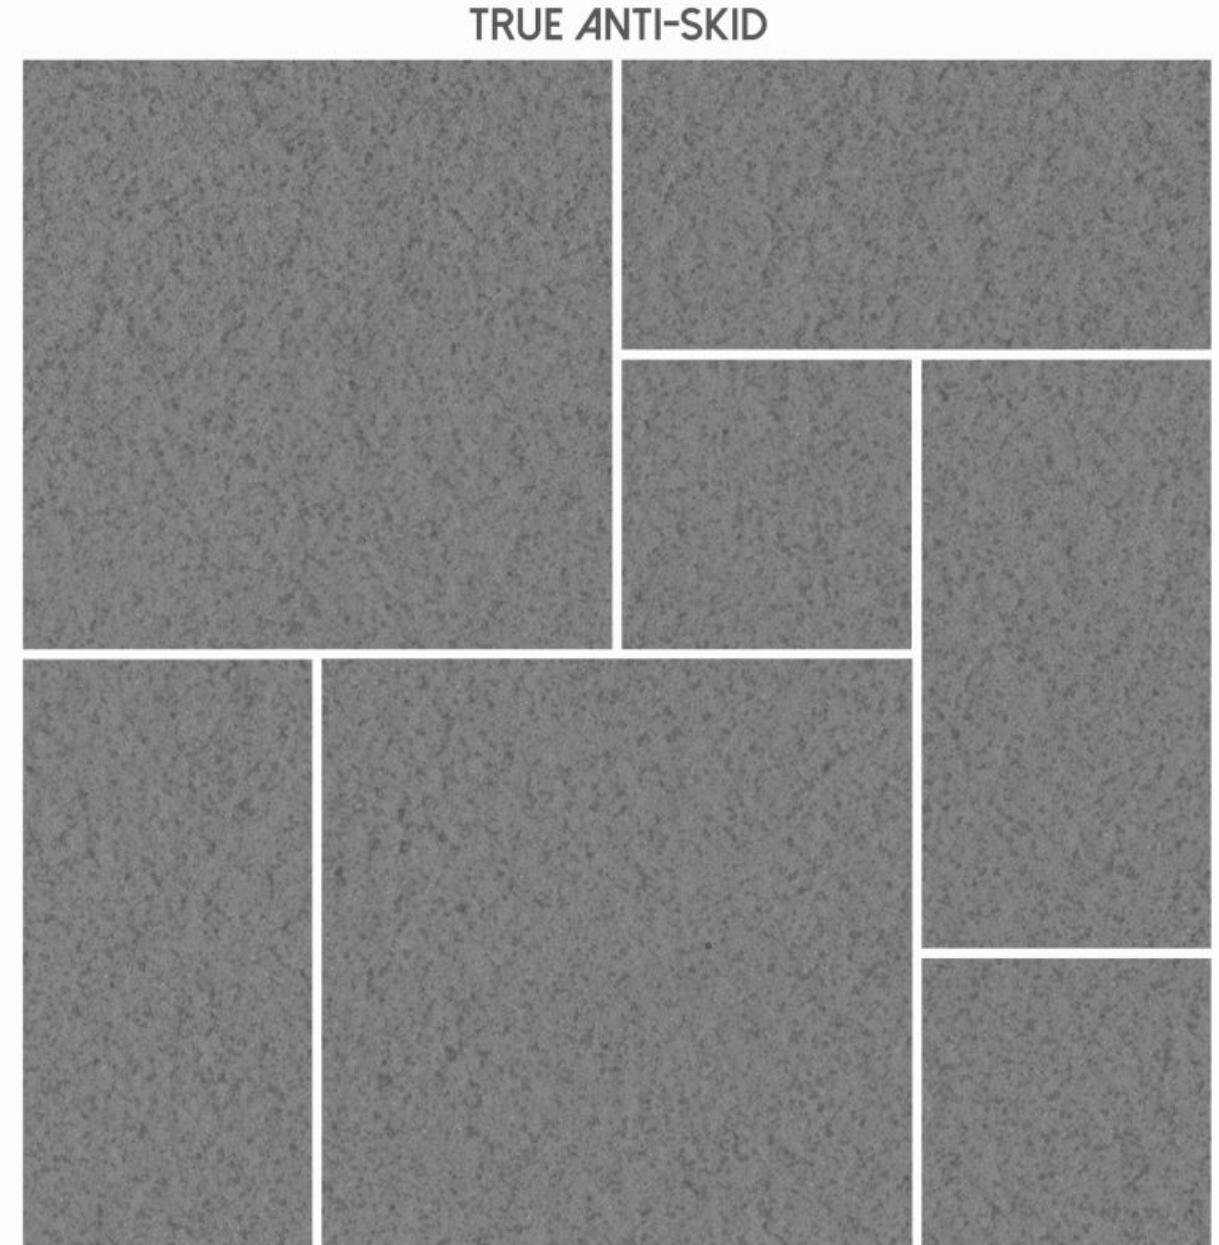

FLAMED DARK GREY

R>12, V2


FINISH:
AS - FLAMED

SIZES:
300X300*, 600X300*, 600X600 MM
SLAB - 1200X600* MM

*requires moq



TRUE ANTI-SKID

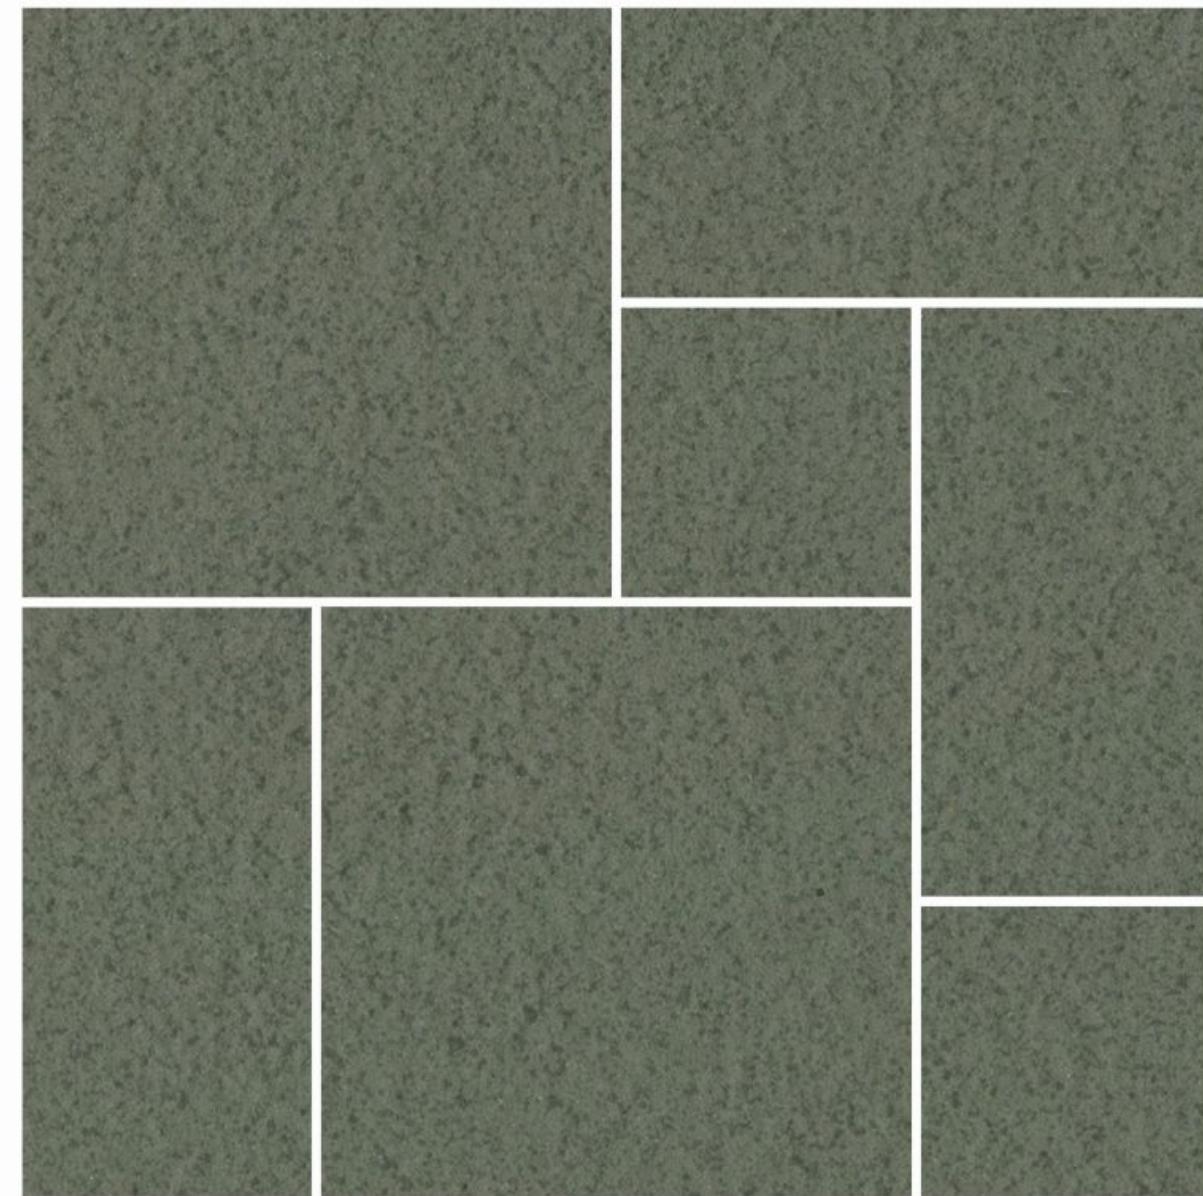

FLAMED KOTA GREEN


R>12, V2

FINISH:
AS - FLAMED

SIZES:
300X300*, 600X300*, 600X600 MM
SLAB - 1200X600 MM

*requires moq

READY-TO-INSTALL STEP TILES

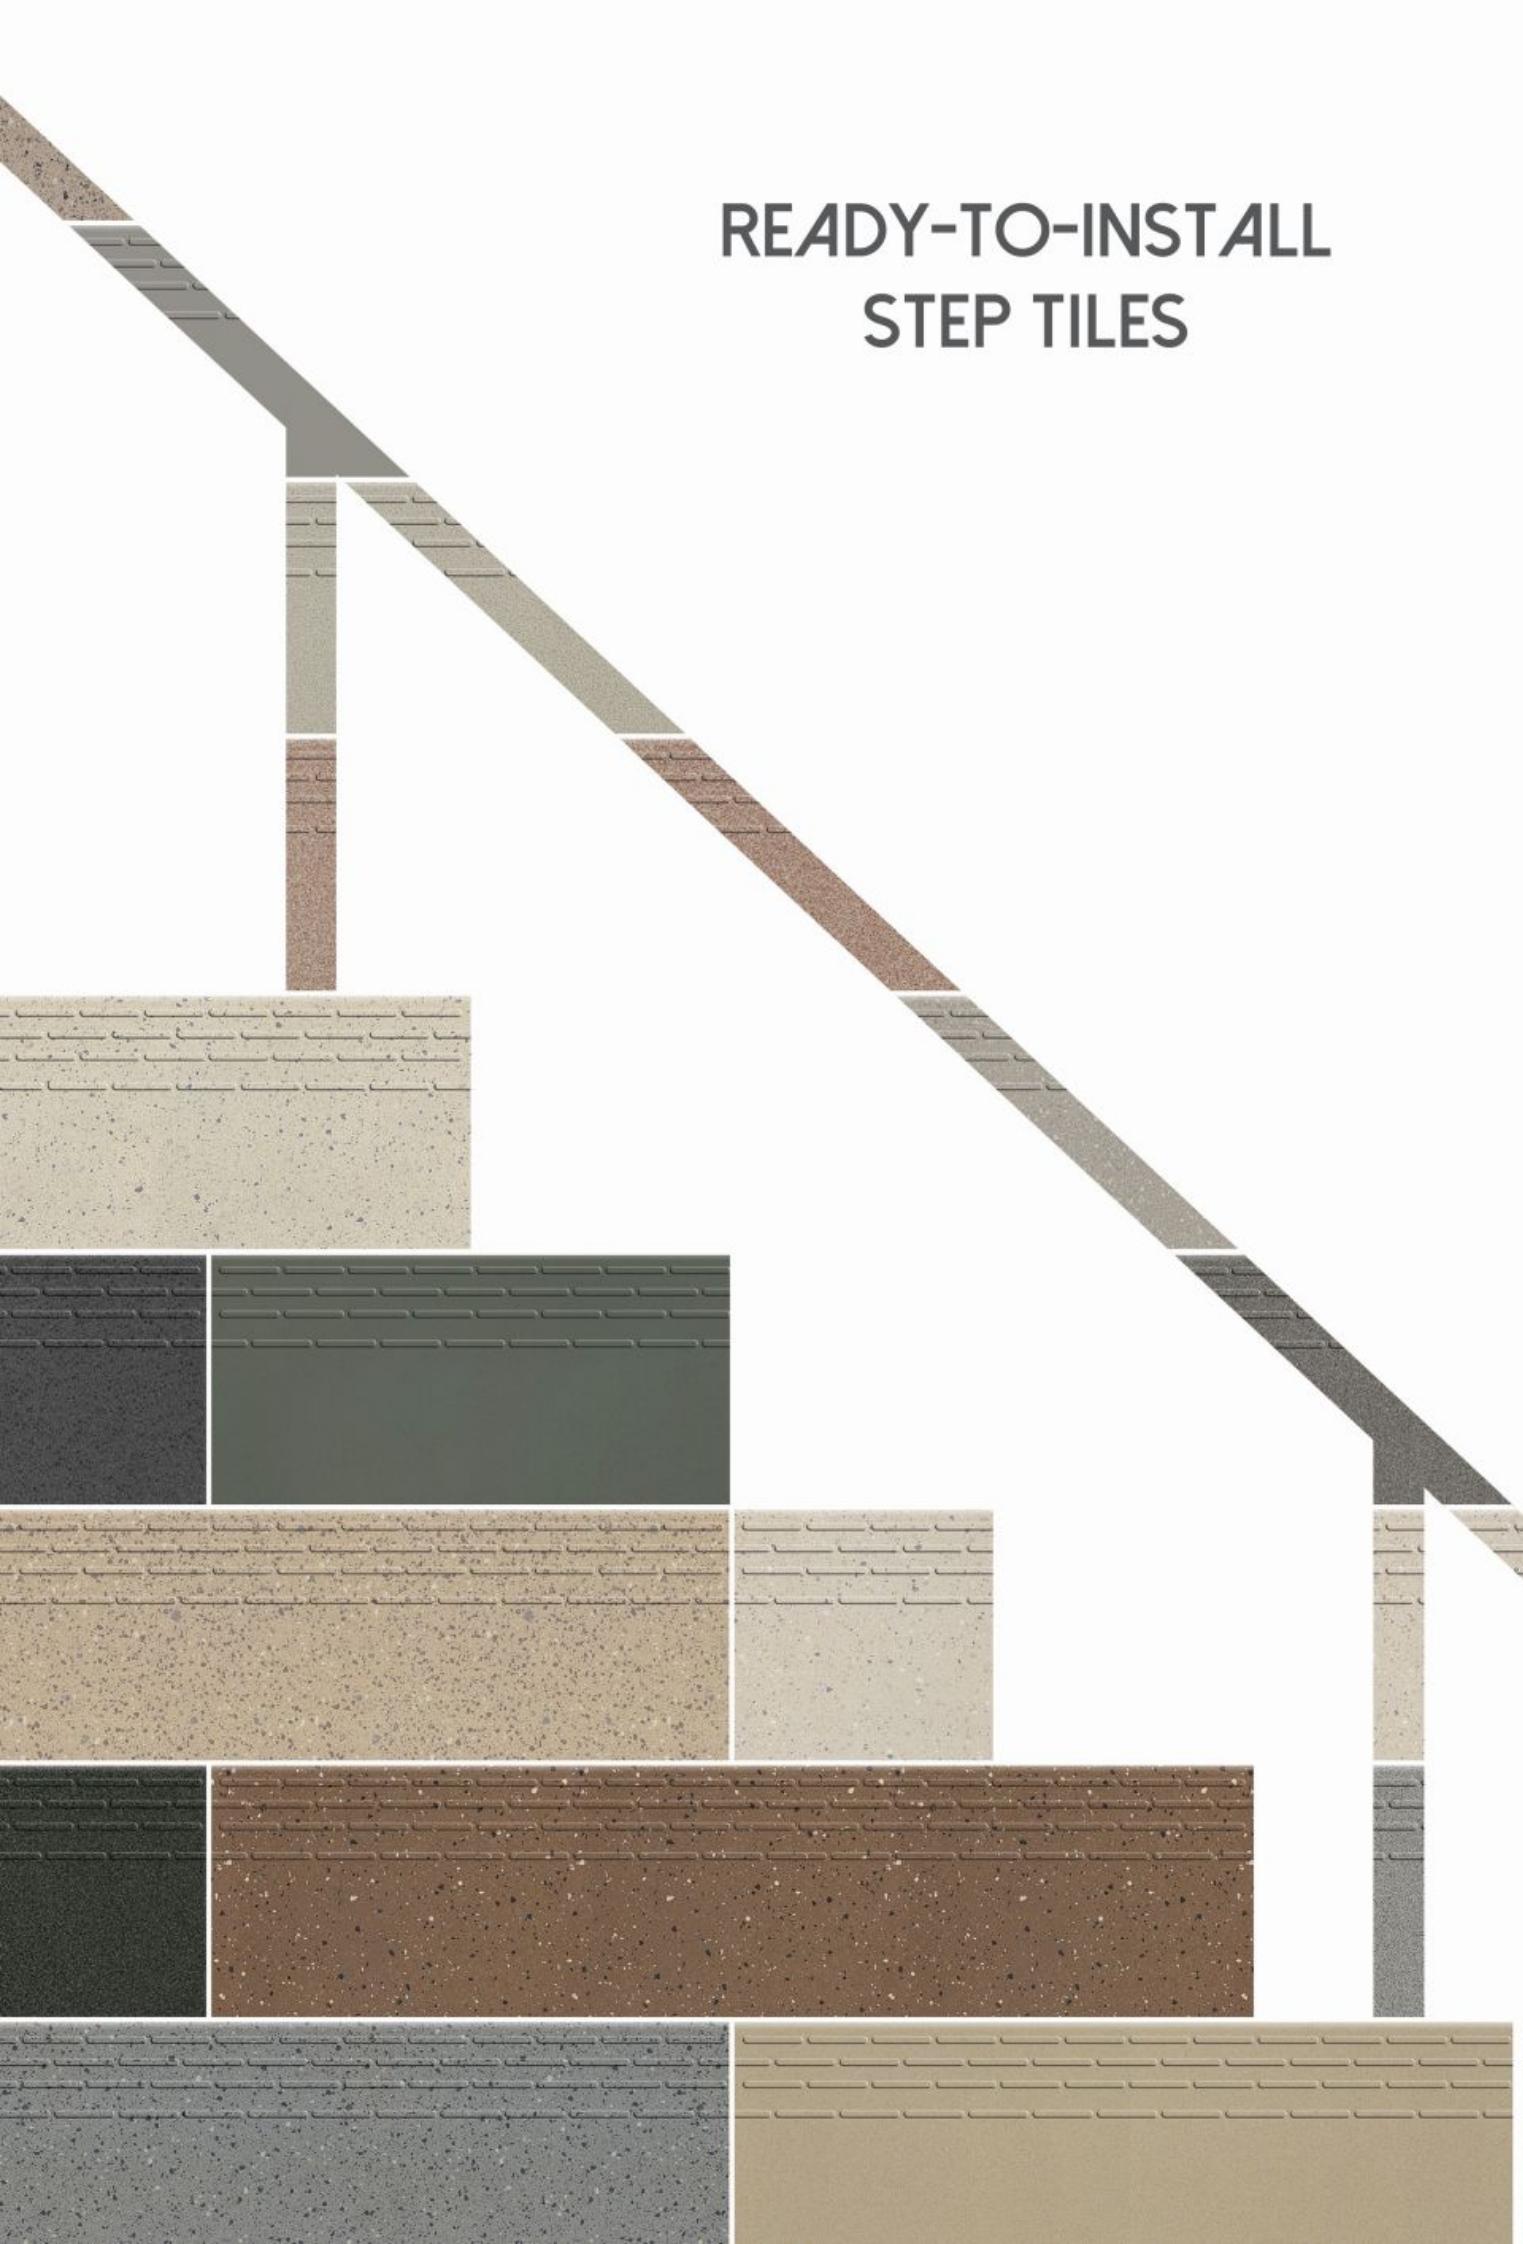

STEP-UP COLLECTION

	A 1520X310MM * moq		B 1220X310MM * moq		C 1200X300MM		D 1050X310MM * moq		E 920X310MM * moq
---	--------------------------	---	--------------------------	---	-----------------	---	--------------------------	---	-------------------------

GRANITE STEP	VS	RESTILE STEP
BUY THE GRANITE SLAB		<input checked="" type="checkbox"/> BUY THE RESTILE - READY TO INSTALL STEP BOX
GRANITE SHADE, COLOUR, DENSITY ETC... MIGHT VARY IN GRANITE		<input checked="" type="checkbox"/> UNPACK BOX, LAY THE TILE, ALL DONE!
SLAB HAS TO BE CUT INTO THE STEP SIZE		<input checked="" type="checkbox"/> AVAILABLE IN VARIETY OF DESIGN
BULL NOSING / HALF MOULDING WILL NEED TO BE DONE		<input checked="" type="checkbox"/> AVAILABLE FOR INDOOR AND OUTDOOR STEPS. CUT GROOVES WILL NEED TO BE DONE
CUT GROOVES WILL NEED TO BE DONE		<input checked="" type="checkbox"/> BULL NOSE READY!
LONGER INSTALLATION TIME		<input checked="" type="checkbox"/> SELF EMBOSSED GROOVES READY
LABOR ORIENTED PROCESS		<input checked="" type="checkbox"/> EASY TO CLEAN
APPROX COST OF GRANITE: 70 - 130RS / SQ FT (DEPENDING ON QUALITY)		<input checked="" type="checkbox"/> EASY TO INSTALL
APPROX COST OF MOULDING: 20 - 45RS / SQ FT (DEPENDING ON CITY)		<input checked="" type="checkbox"/> AT LEAST 65-70% FASTER LAYING TIME COMPARED TO GRANITE STEPS
APPROX COST OF LEATHER FINISH: 25 - 50RS / SQ FT (DEPENDING ON CITY)		<input checked="" type="checkbox"/> AT LEAST 20 - 40% CHEAPER COMPARED TO GRANITE STEPS
FINAL APPROX COST OF GRANITE STEP: 100-220/SQ FT.		<input checked="" type="checkbox"/> FINAL APPROX COST OF RESTILE STEP TILE: 100-150 / SQ FT



Restile
every inch of **imagination**

SELF EMBOSSED GROOVES

- Provides better grip
- Easy to clean compared to line cut
- Less chance of dirt getting stuck in grooves

BULL - NOSE FINISH

- Prevents injury from sharp edges

ANTI SKID PROPERTY

- Coefficient of friction (μ)
- $\mu < 0.4$ - indoor step tile (smooth finish)
- $\mu > 0.4$ - outdoor step tile (anti-skid finish)

FULL BODY TILE

- Design top-to-bottom
- Sustainability




STEP-UP COLLECTION

READY-TO-INSTALL

STEP-TILE

 Restile
every inch of **imagination**

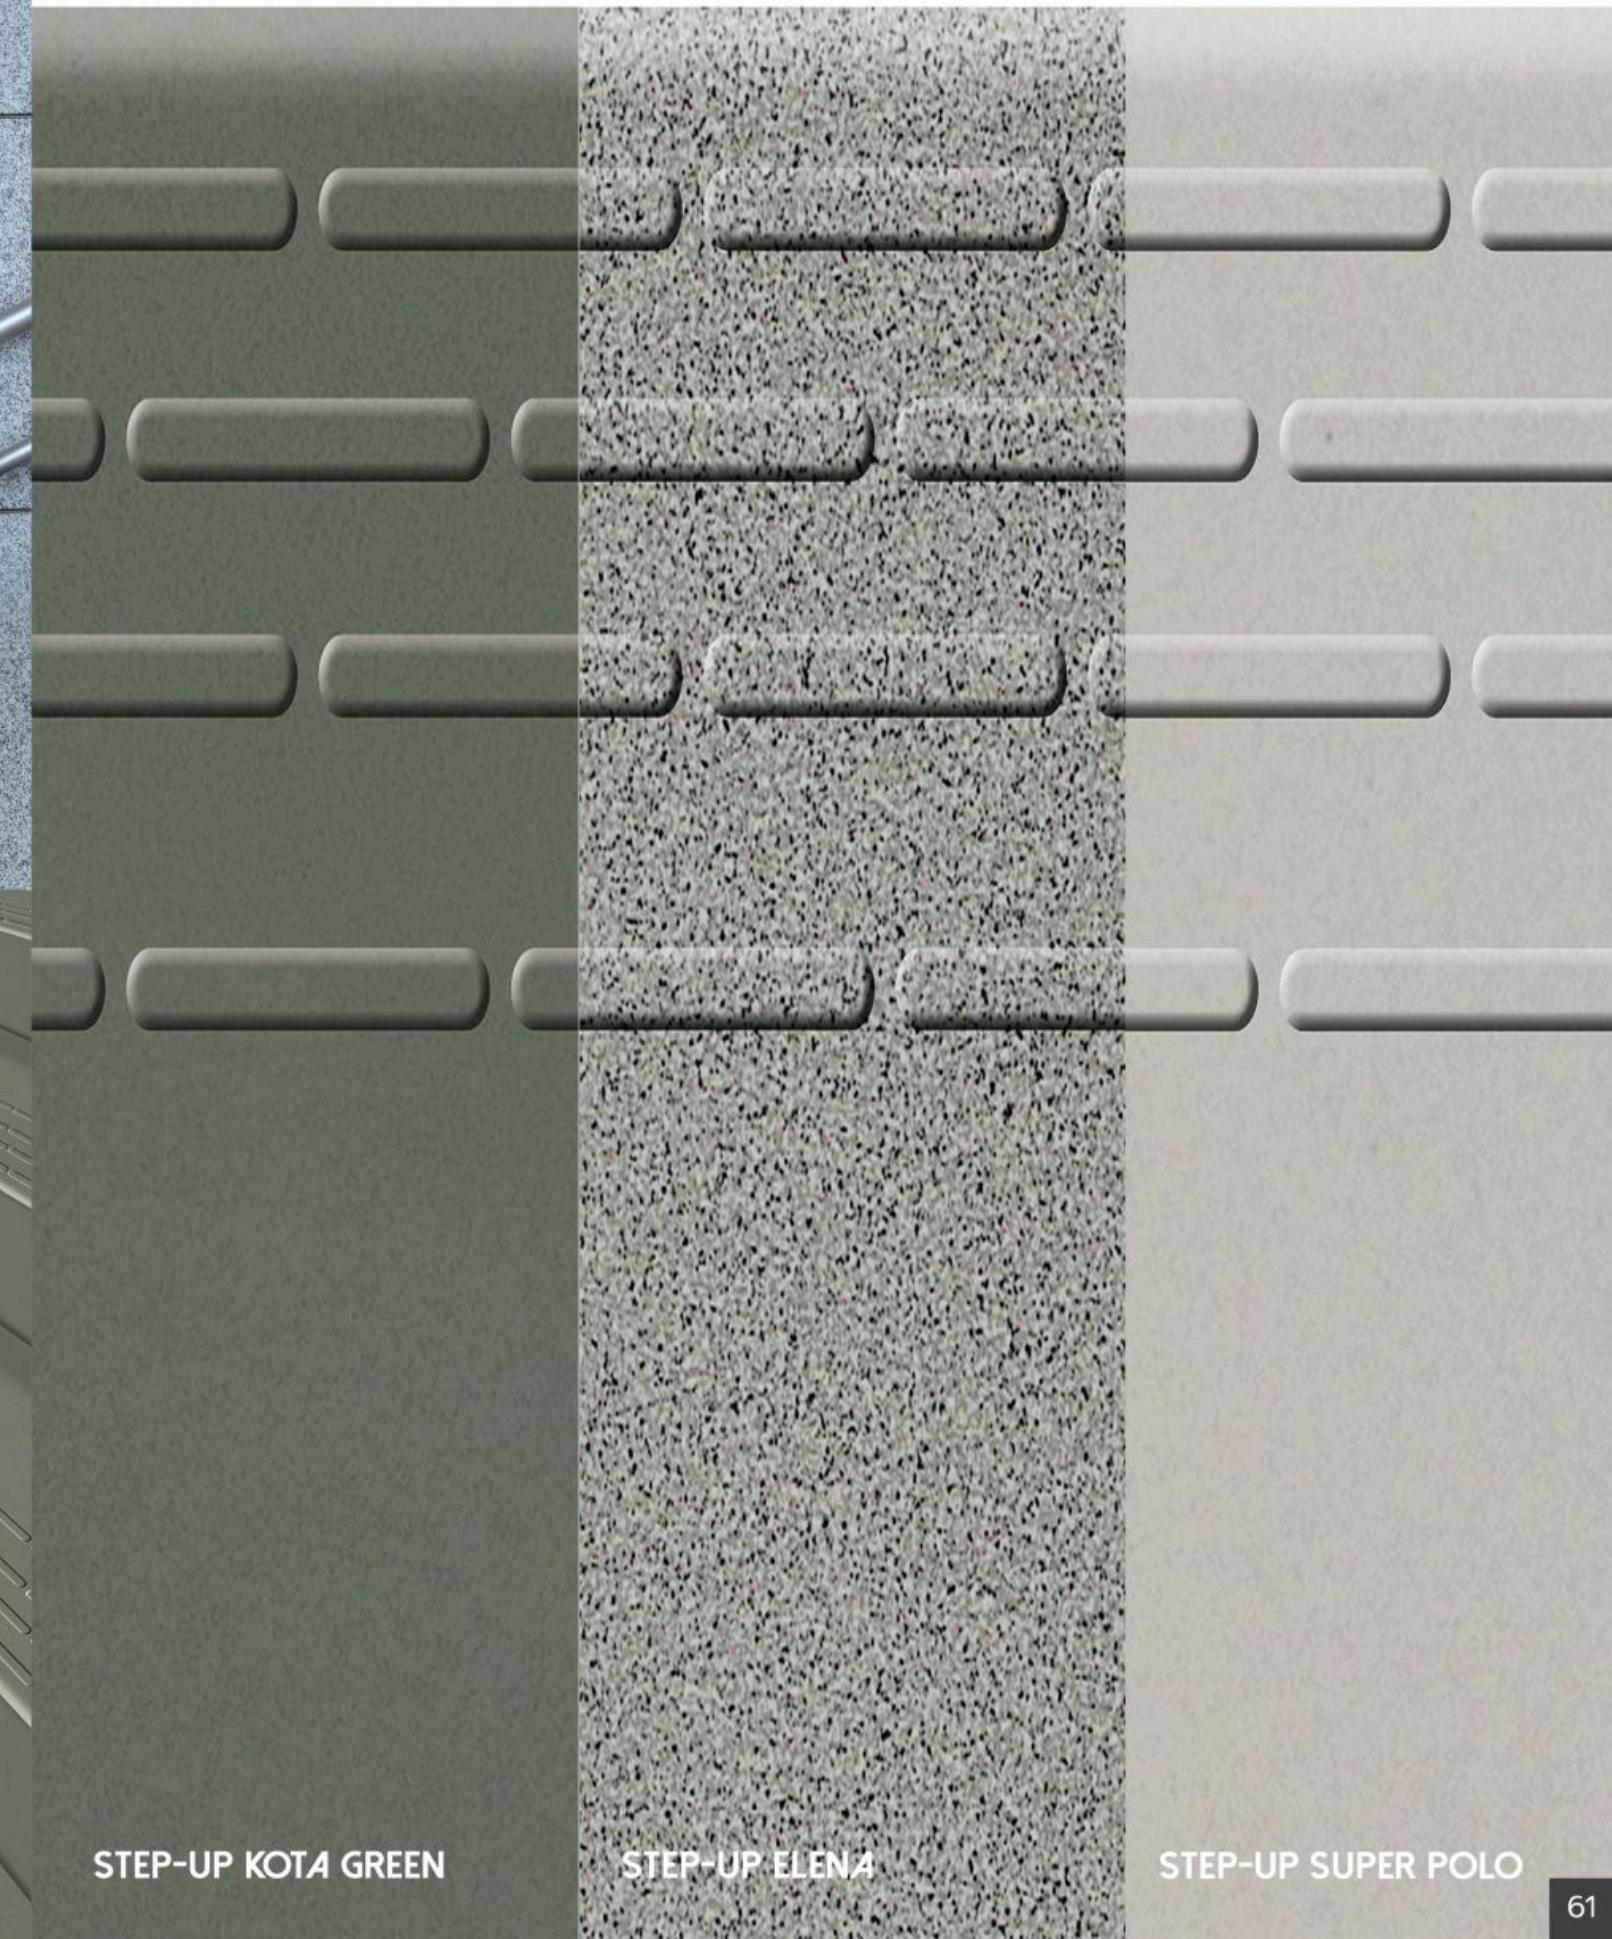

STEP-UP KOTA GREEN

STEP-UP ELENA


STEP-UP SUPER POLO



STEP-UP COLLECTION

READY-TO-INSTALL
STEP-TILE

 Restile
every inch of **imagination**

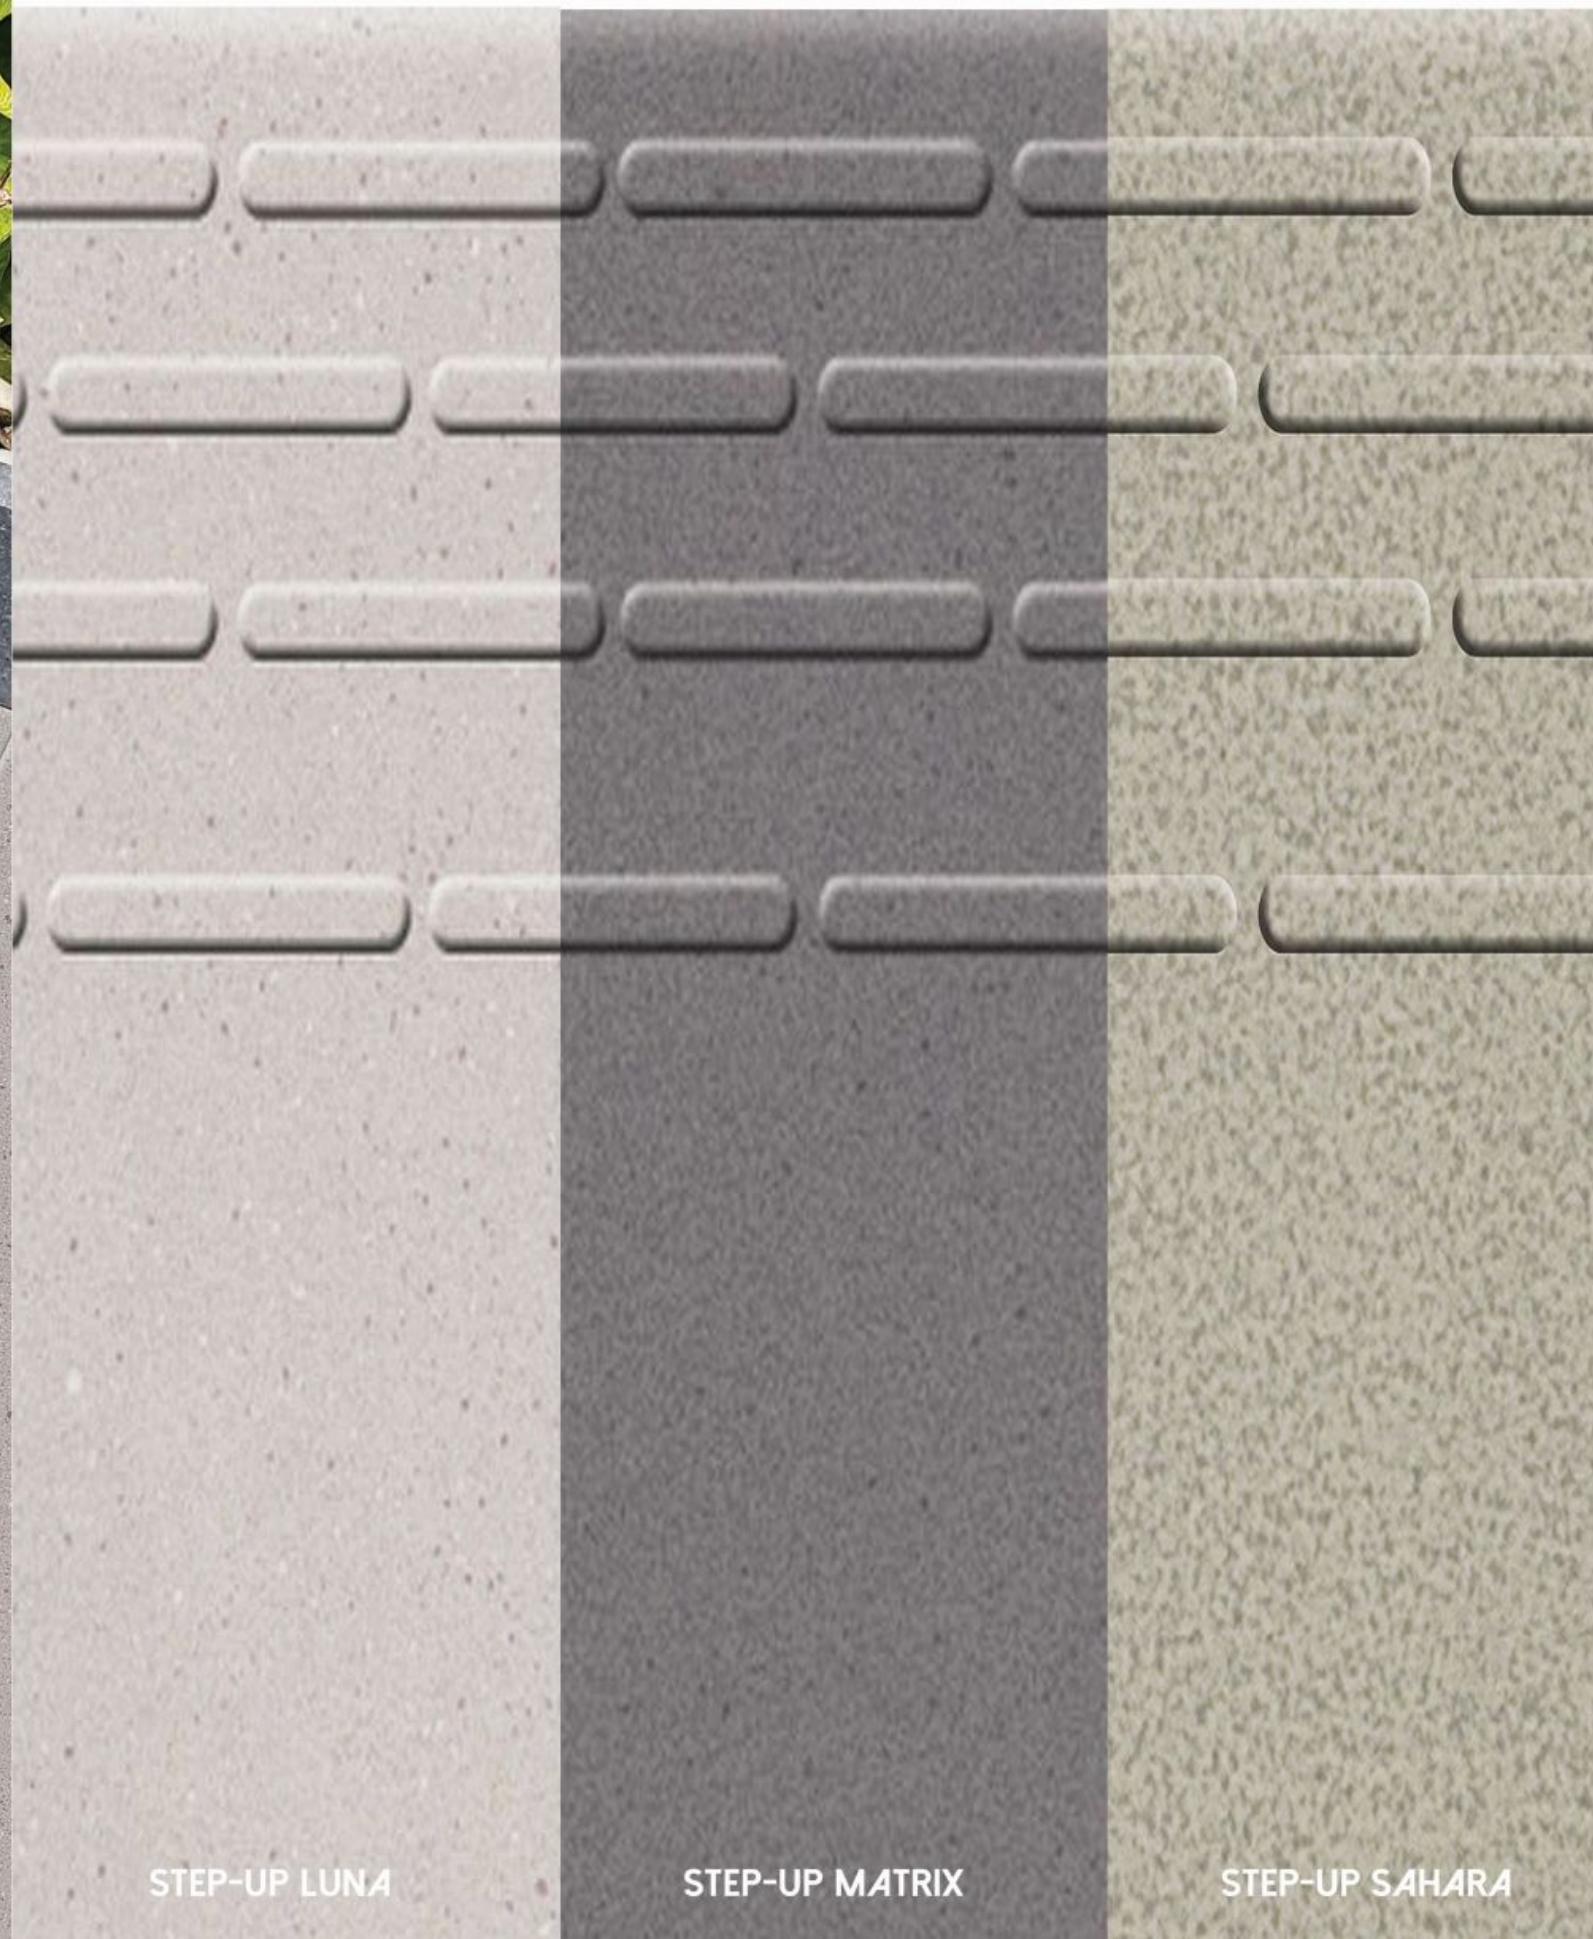

STEP-UP LUNA

STEP-UP MATRIX

STEP-UP SAHARA



STEP-UP COLLECTION

READY-TO-INSTALL

STEP-TILE

STEP-UP ICONIC

STEP-UP MIST

STEP-UP PEBBLES



STEP-UP COLLECTION

READY-TO-INSTALL

STEP-TILE

Restile
every inch of **imagination**



STEP-UP BLACK



STEP-UP BEIGE





STEP-UP GREY

HEAVY-DUTY INDUSTRIAL TILING SOLUTIONS


IMPACTA COLLECTION

The Original Favorite for Industrial flooring, now expanding its footprint into various segments where heavy-duty flooring is required. From kitchens, to station platforms to factories, Impacta Collection is the perfect choice to take the load you have to offer, plus added benefits of acid and alkali resistance.


From Heavy Industries to Heavy Trailers, we've got you covered. Our Experts will suggest you size and thickness according to your usage and application areas.

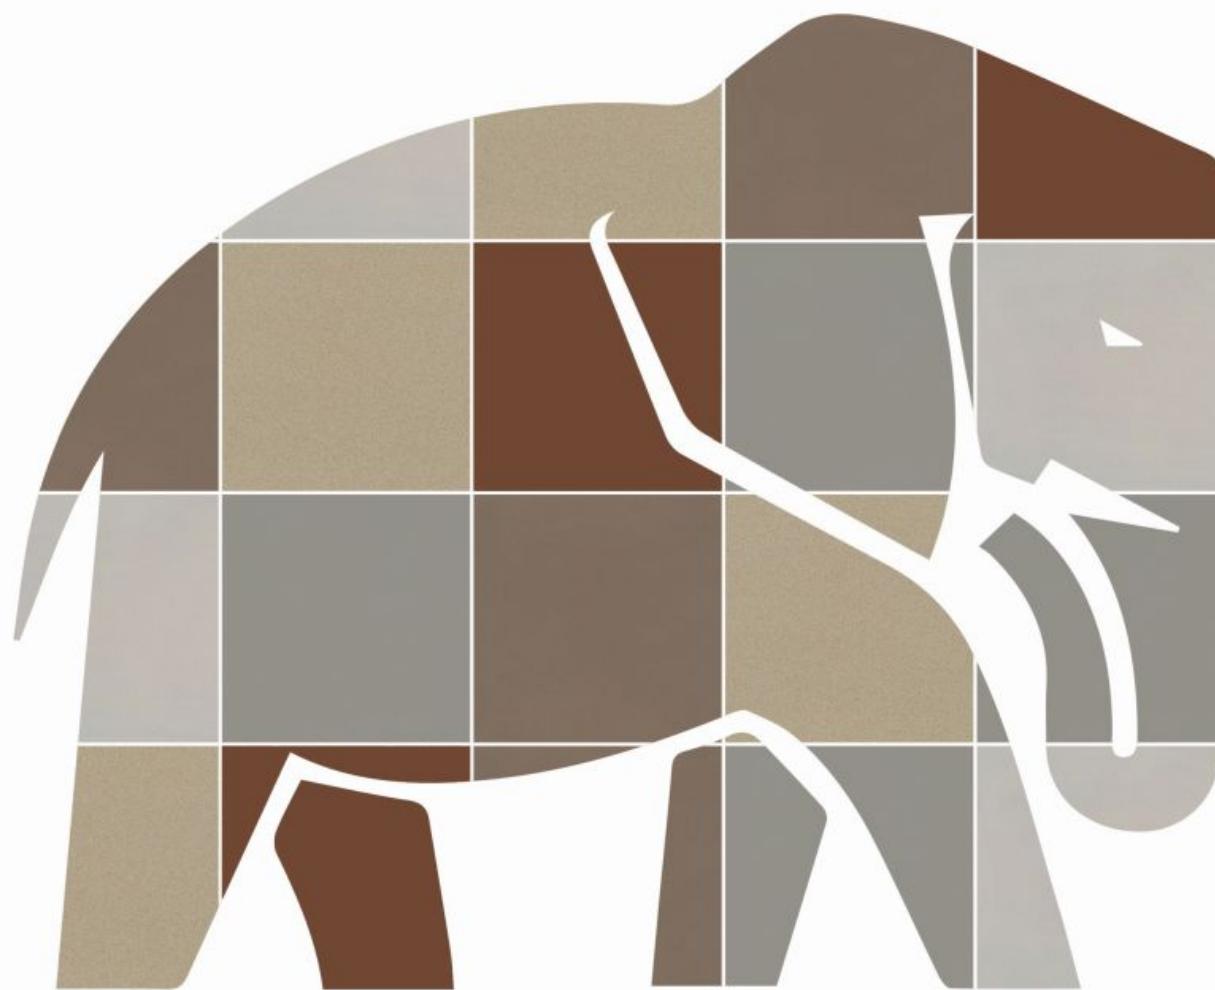

12 MM



14 MM



20 MM

(and any thickness in between)

FULL
BODY
COLOR

THRU
BODY
DESIGNS

UN-
GLAZED
SURFACE

ANTI-
SLIP
R>10

TECHNICAL
GRANITO
PORCELAIN




HEAVY LOADS DEMANDS THICK TILES.

THERE ARE CERTAIN APPLICATION AREAS, WHEREIN THE ENVIRONMENT AND USAGE REQUIRES A THICK STRONG TILE - TO TAKE THE HEAVY LOAD. FROM FORKLIFT MOVEMENT TO BARRELS STORAGE. THERE IS NO RISK OF DAMAGE ONCE YOU HAVE RESTILE IMPACTA TILES INSTALLED. THE PRODUCT COMES WITH A HIGH COMPACT STRENGTH, AND BREAKING STRENGTH, GIVING YOU THE BEST OPTION FOR YOUR HEAVY LOAD FLOORING.

EASY MAINTENANCE, EASY CLEANING.

HAVING THE PROPERTY OF FULL BODY HOMOGENEOUS UNTRIFIED TILES, AND WITH THE WATER ABSORPTION < 0.06%. THE SURFACE IS LITERALLY INPENETRABLE. THE TILES ARE ALSO ACID AND ALKALI AND CHEMICAL RESISTANT, MAKING IT PERFECT FOR ANY FOOD, PHARMA, AUTO INDUSTRY. IMPACTA TILES REQUIRES MINIMUM BUT REGULAR MAINTENANCE AND CLEANING - AND THE TILES WILL LOOK LIKE NEW ALWAYS!

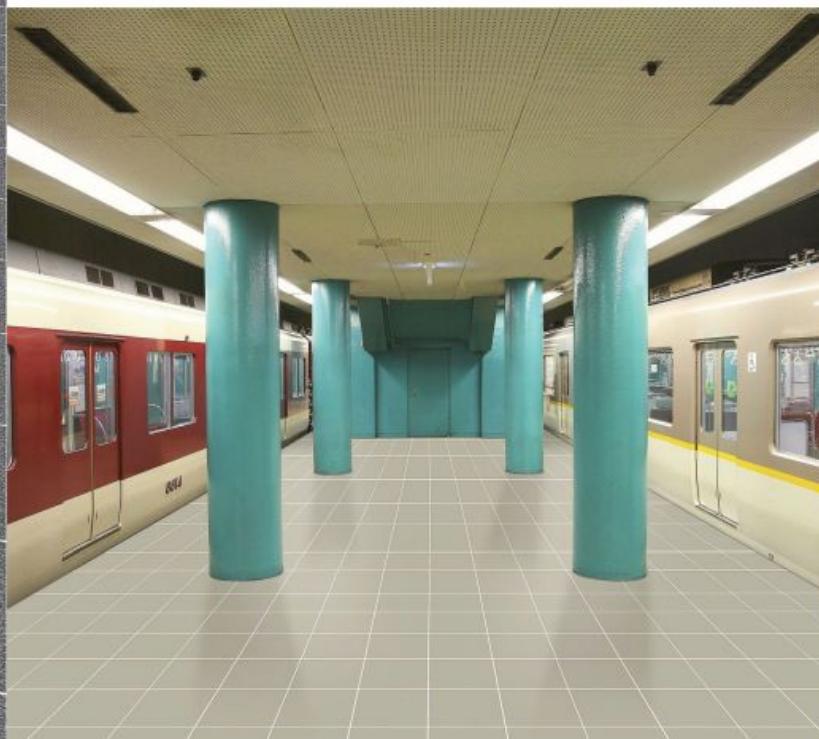

UNGLAZED - SAFE EVEN WHEN WET!

RESTILE TILES IN GENERAL HAVE AN INHERIT ANTI-SKID PROPERTY. THIS IS DUE TO THE UNIQUE UNPOLISHED SURFACE FINISH. BEING UNGLAZED - GIVES OUR TILE THE SUPERIOR QUALITY OF ANTI-SLIP RESISTANT EVEN IN WET CONDITIONS, WHICH IS THE BIGGEST FACTORY WHEN IT COMES TO FOOD AND BEVERAGES INDUSTRIES. DIFFERENT INDUSTRIES HAS ITS DIFFERENT REQUIREMENT ON SIZES, BUT THE REQUIREMENT OF ANTI-SLIP IS UNIVERSAL.



IMPACTA COLLECTION

APPLICATION AREAS

APPLICATION AREAS OF IMPACTA TILES

Food
Industry

Beverage
Industry

Brewery
Factory

Super
Markets

Super
Markets

Auto
Industry

Textile
Industry

Packing
Industry

Parking
Areas

Railway
Stations


ADVANTAGES OF IMPACTA TILES

- FULL BODY HOMOGENEOUS
- HIGHEST MECHANICAL LOAD POSSIBLE
- UNGLAZED SURFACE FINISH
- HIGH TEMPERATURE RESISTANT
- WATER ABSORPTION < 0.06%
- IDEAL FOR WET AREAS
- RESISTANT TO ABRASION
- EASY TO MAINTAIN AND CLEAN
- CONSISTENT DENSITY TOP TO BOTTOM
- ECONOMICAL SOLUTION FOR INDUSTRIES
- CHEMICAL AND STAIN RESISTANT
- ONE TIME SOLUTION - LASTS FOR DECADES!



IMPACTA COLLECTION
HEAVY-DUTY TILES

 Restile
every inch of **imagination**

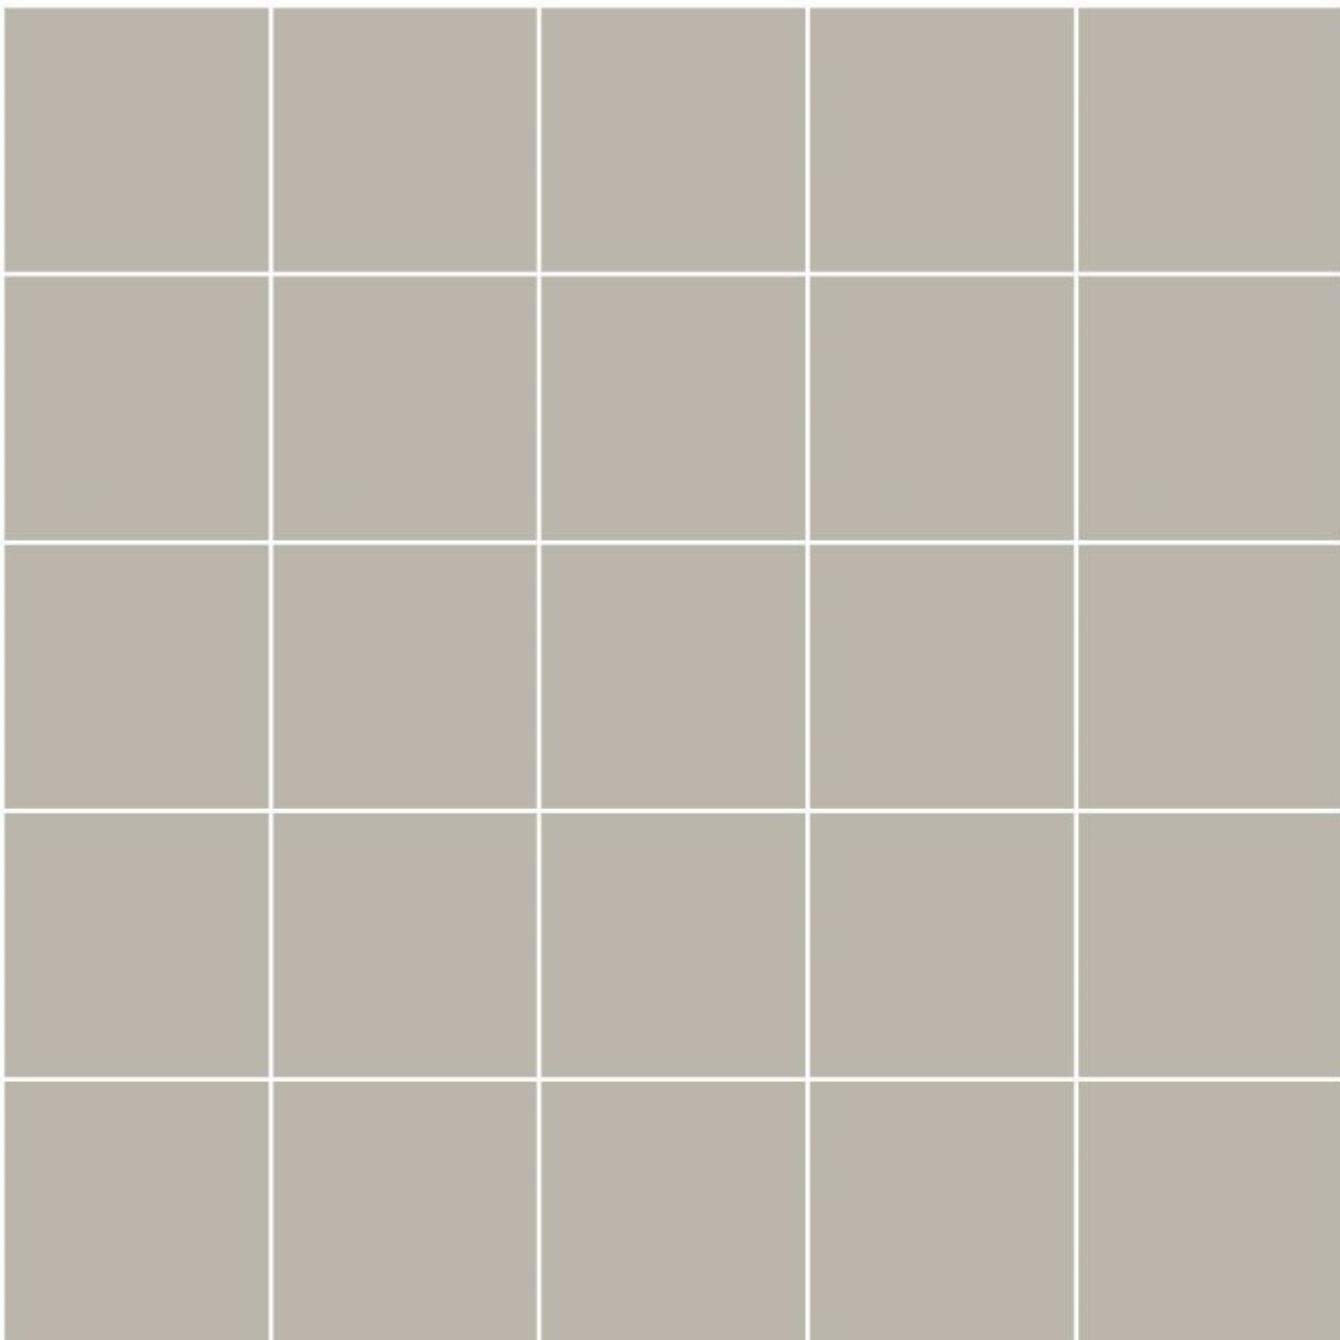

BEIGE

FINISH: SM


THICKNESS: 12, 14, 16, 20 MM

SIZES: 300X300, 600X300, 600X600 MM



IMPACTA COLLECTION
HEAVY-DUTY TILES

 Restile
every inch of **imagination**

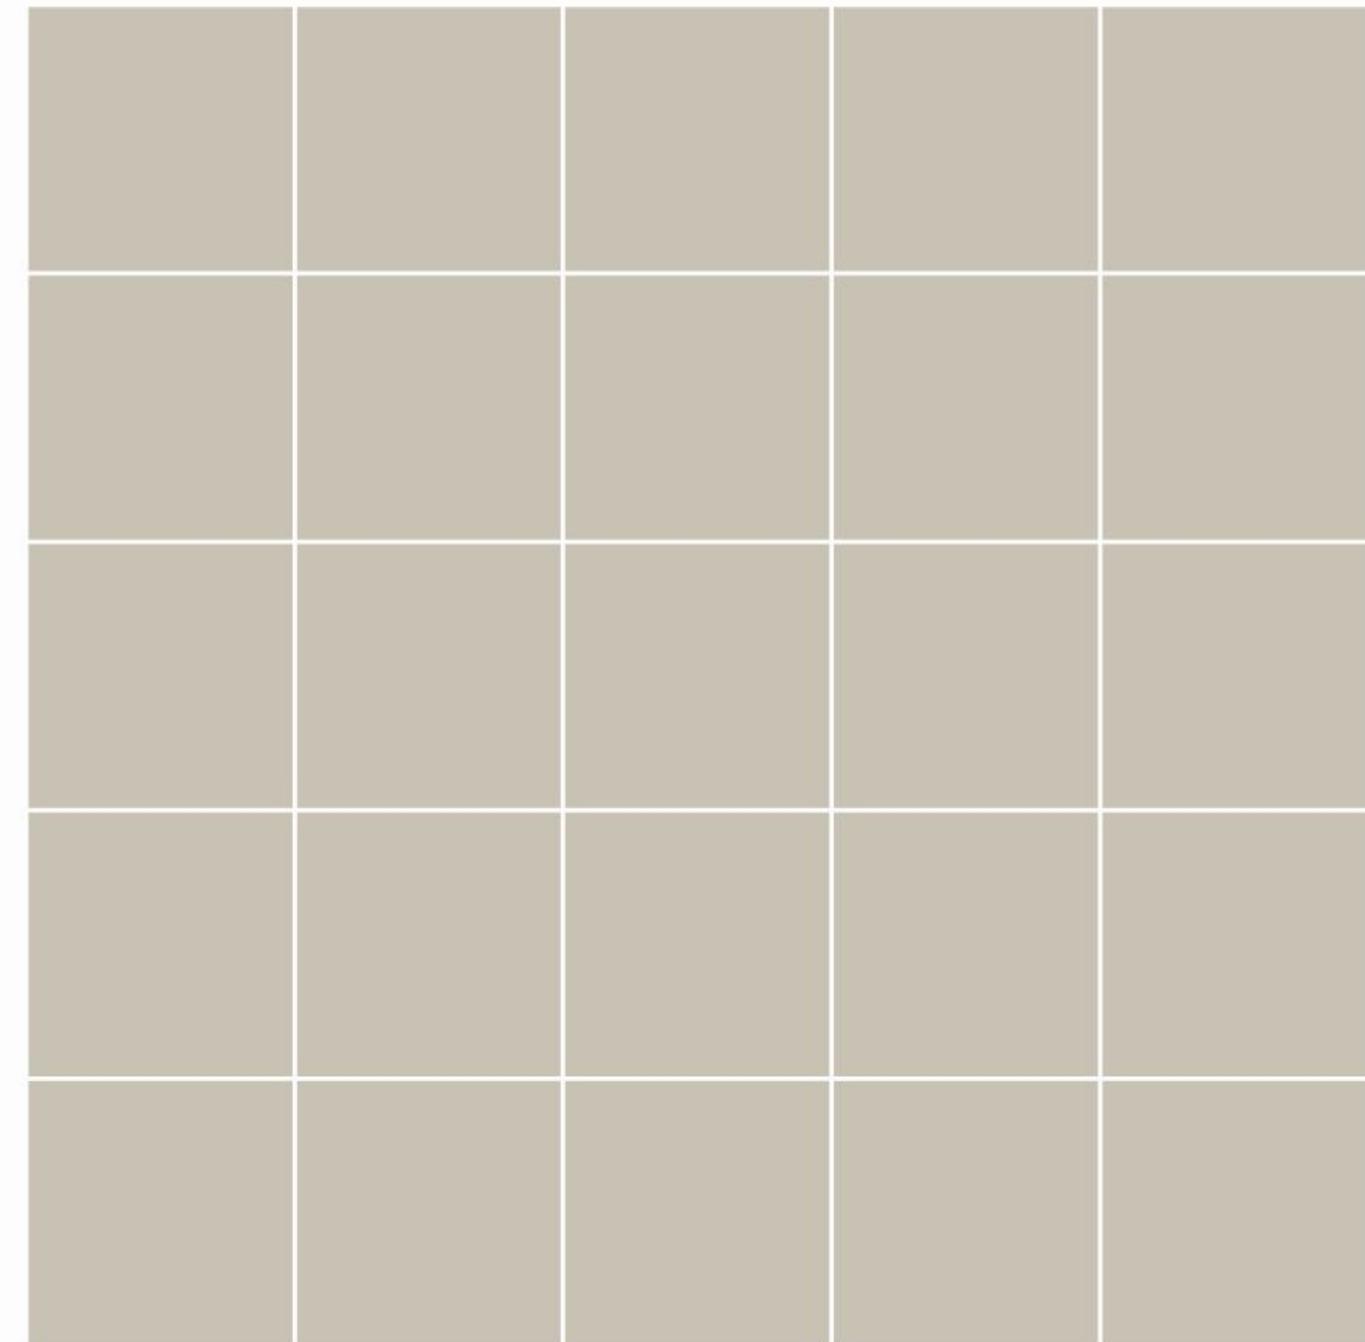


POLO

FINISH: SM


THICKNESS: 12, 14, 16, 20 MM

SIZES: 300X300, 600X300, 600X600 MM

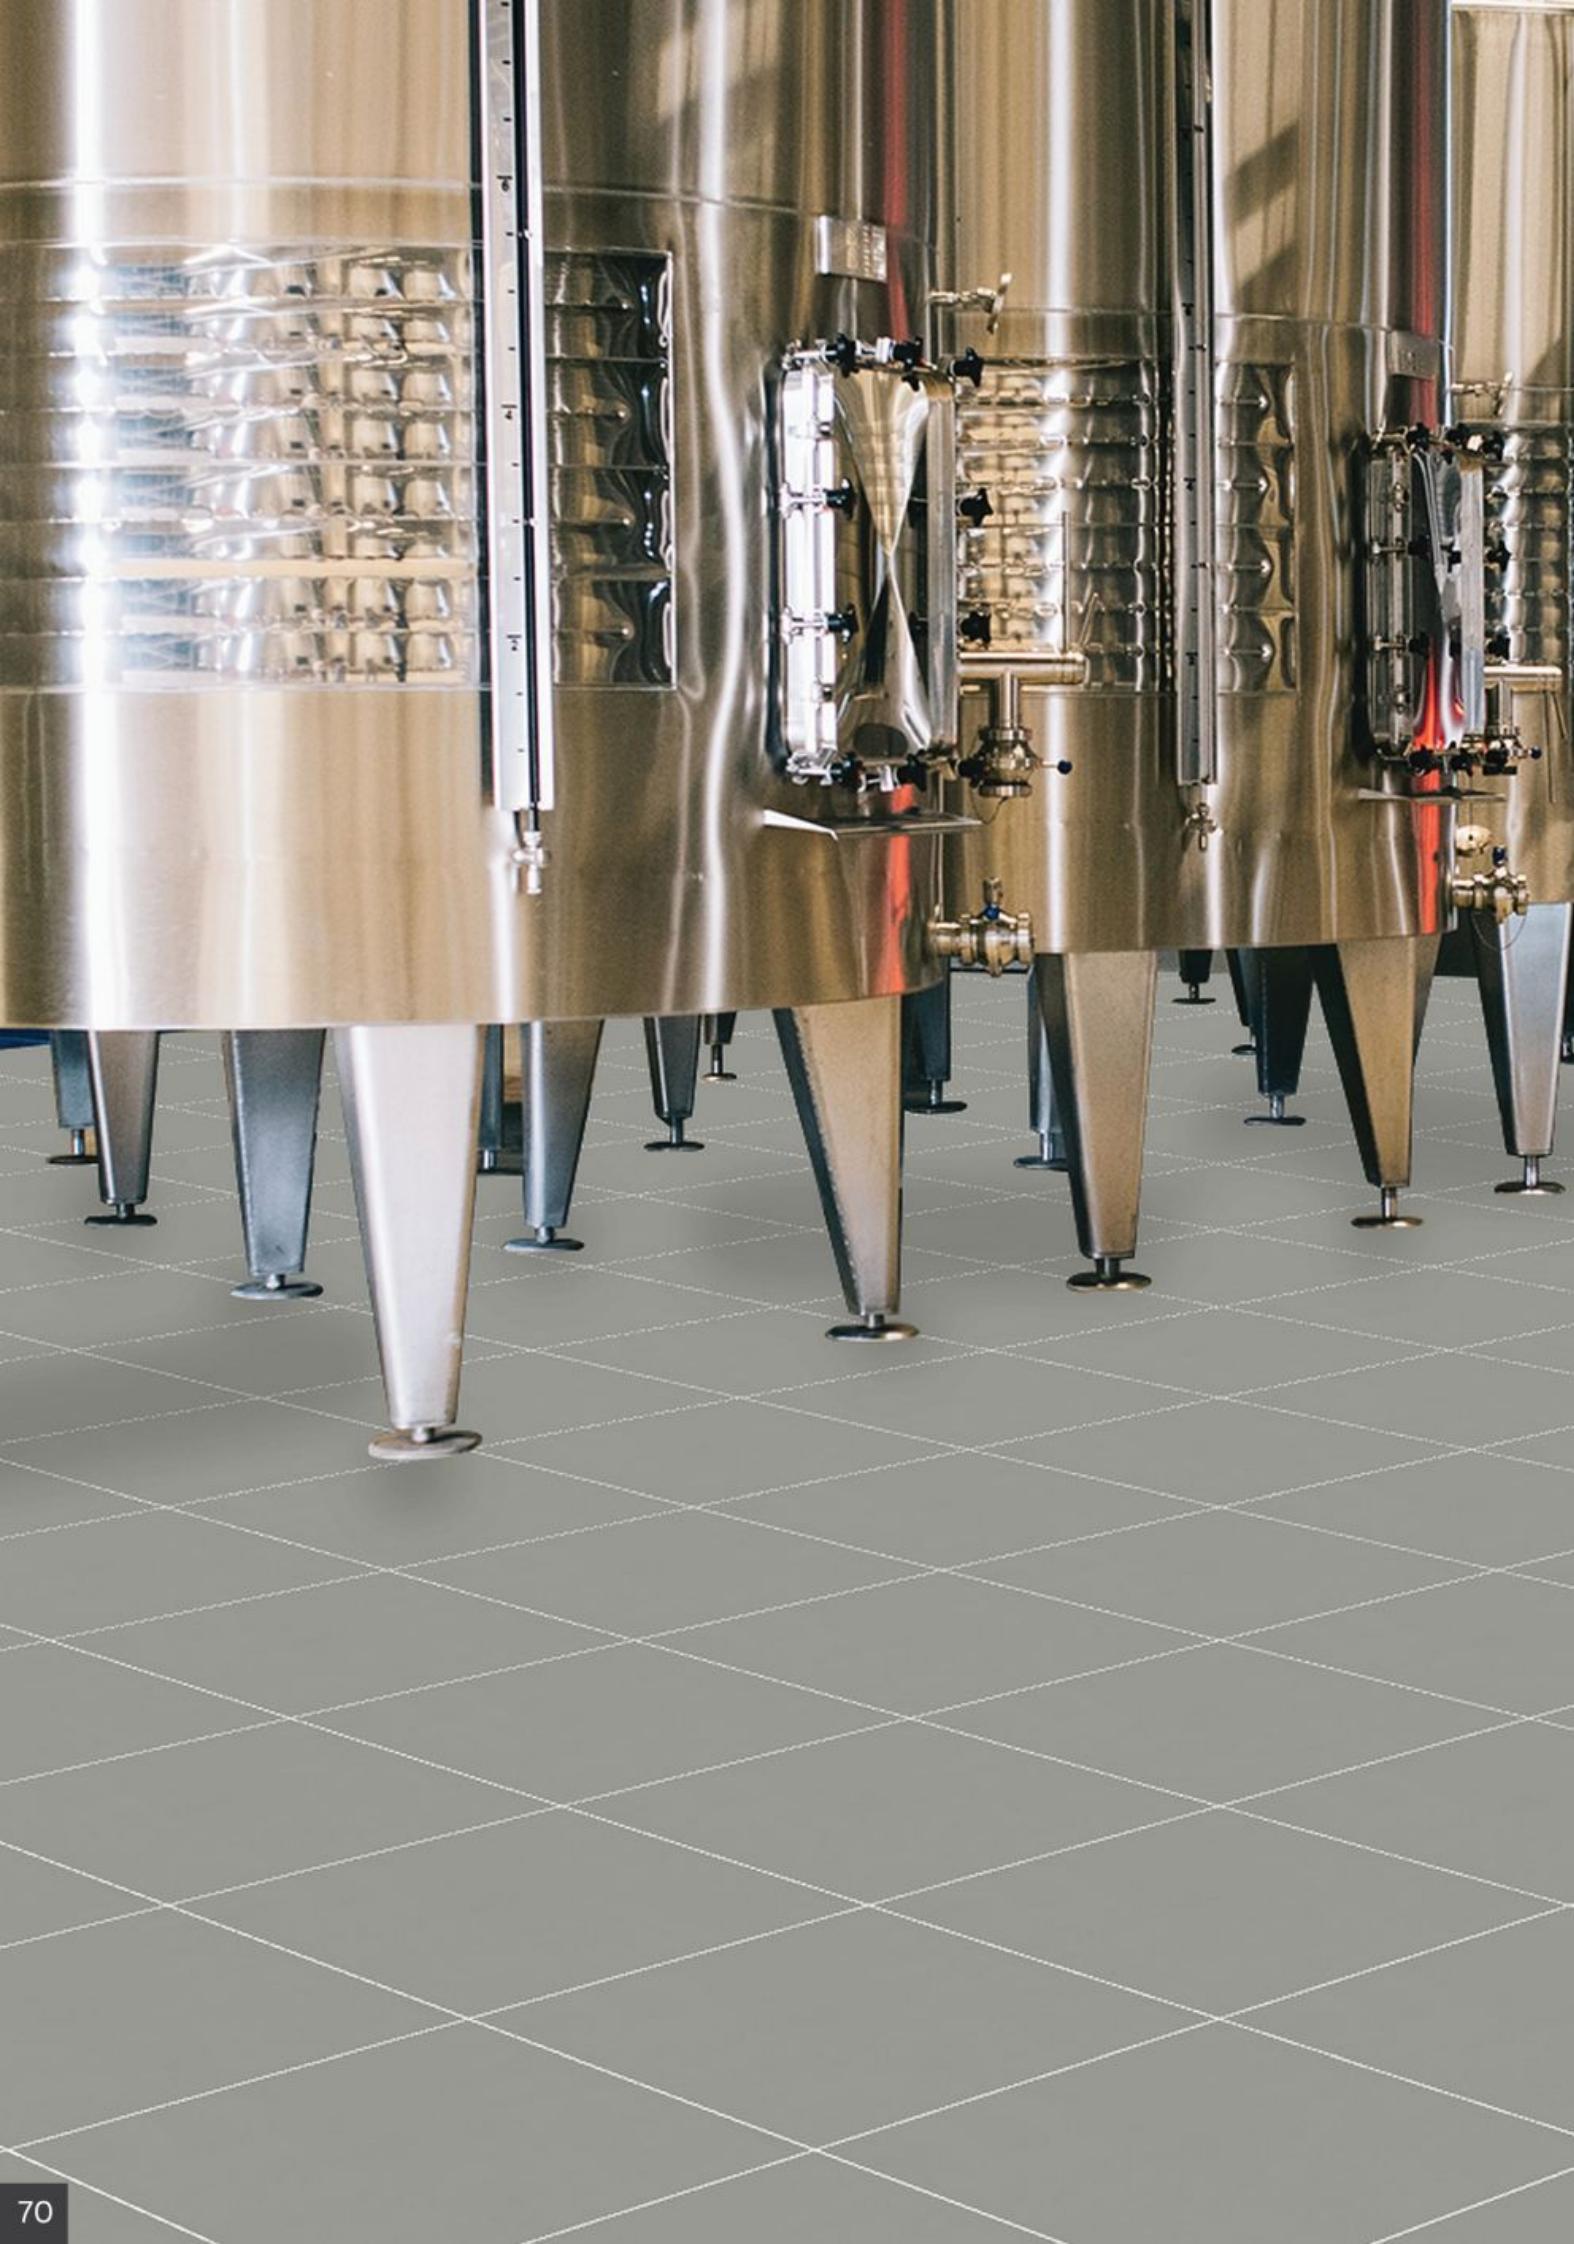

IMPACTA COLLECTION
HEAVY-DUTY TILES

 Restile
every inch of **imagination**

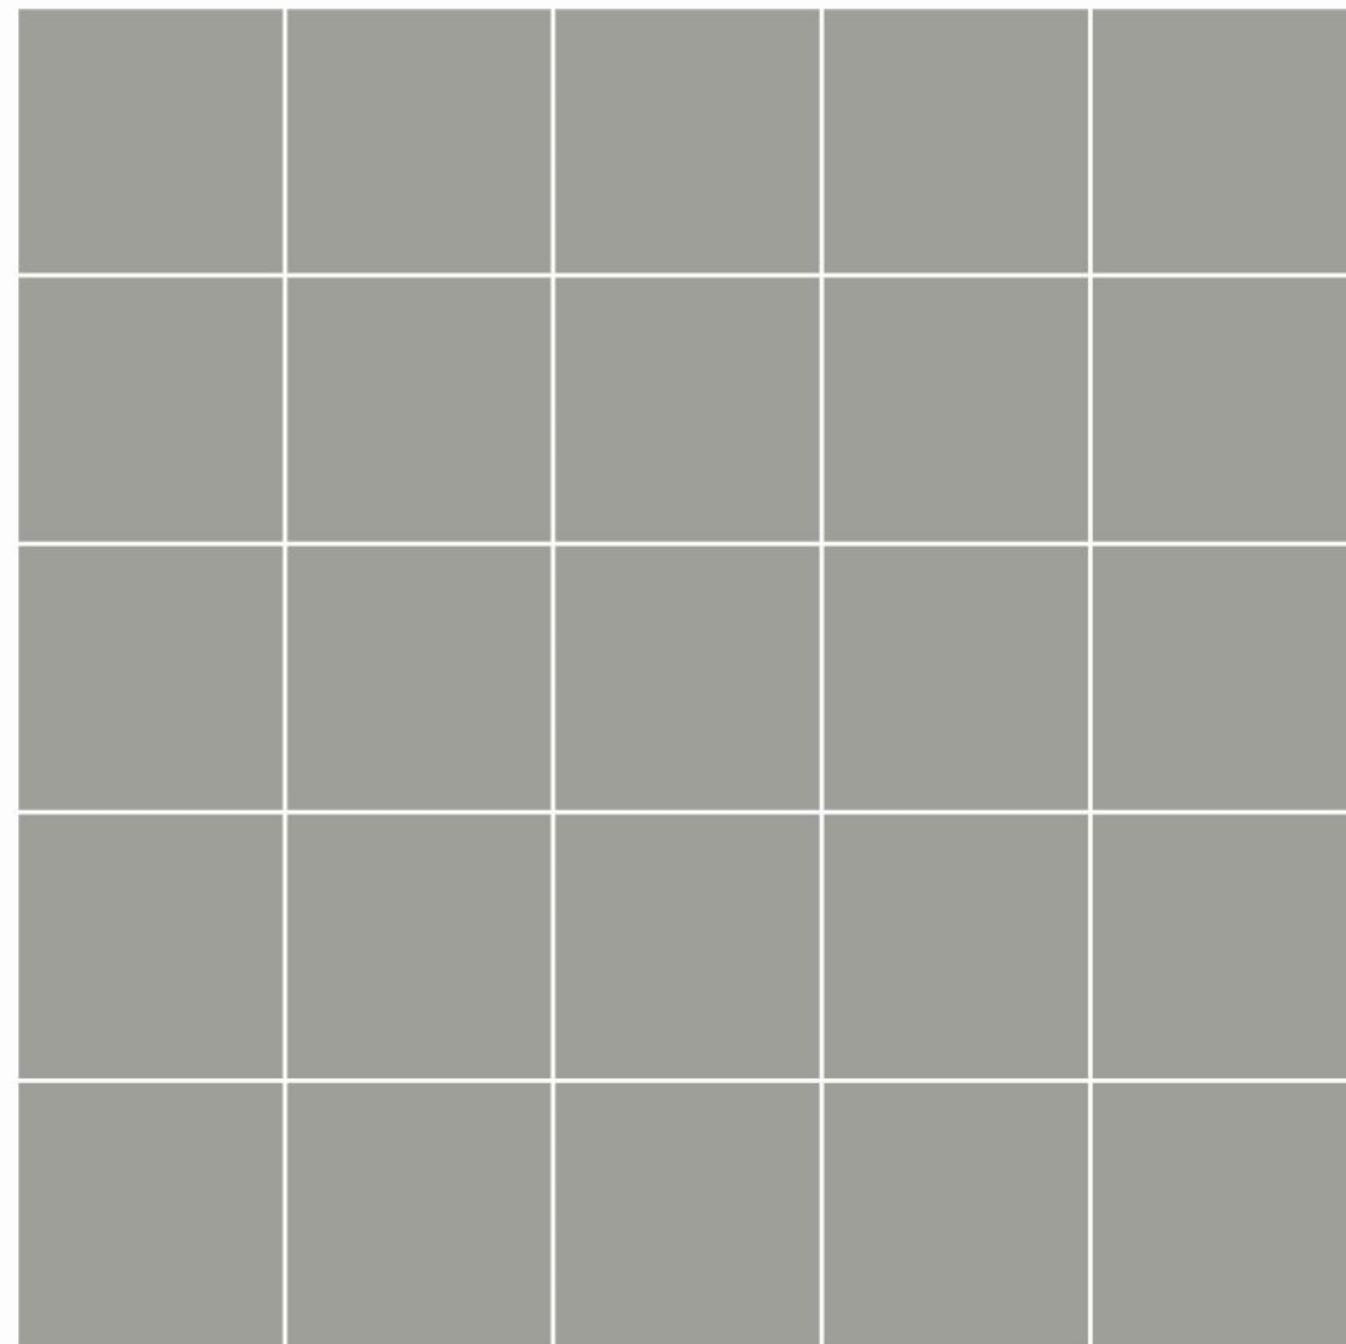

STEEL GREY

FINISH: SM


THICKNESS: 12, 14, 16, 20 MM

SIZES: 300X300, 600X300, 600X600 MM



IMPACTA COLLECTION
HEAVY-DUTY TILES

 **Restile**
every inch of **imagination**

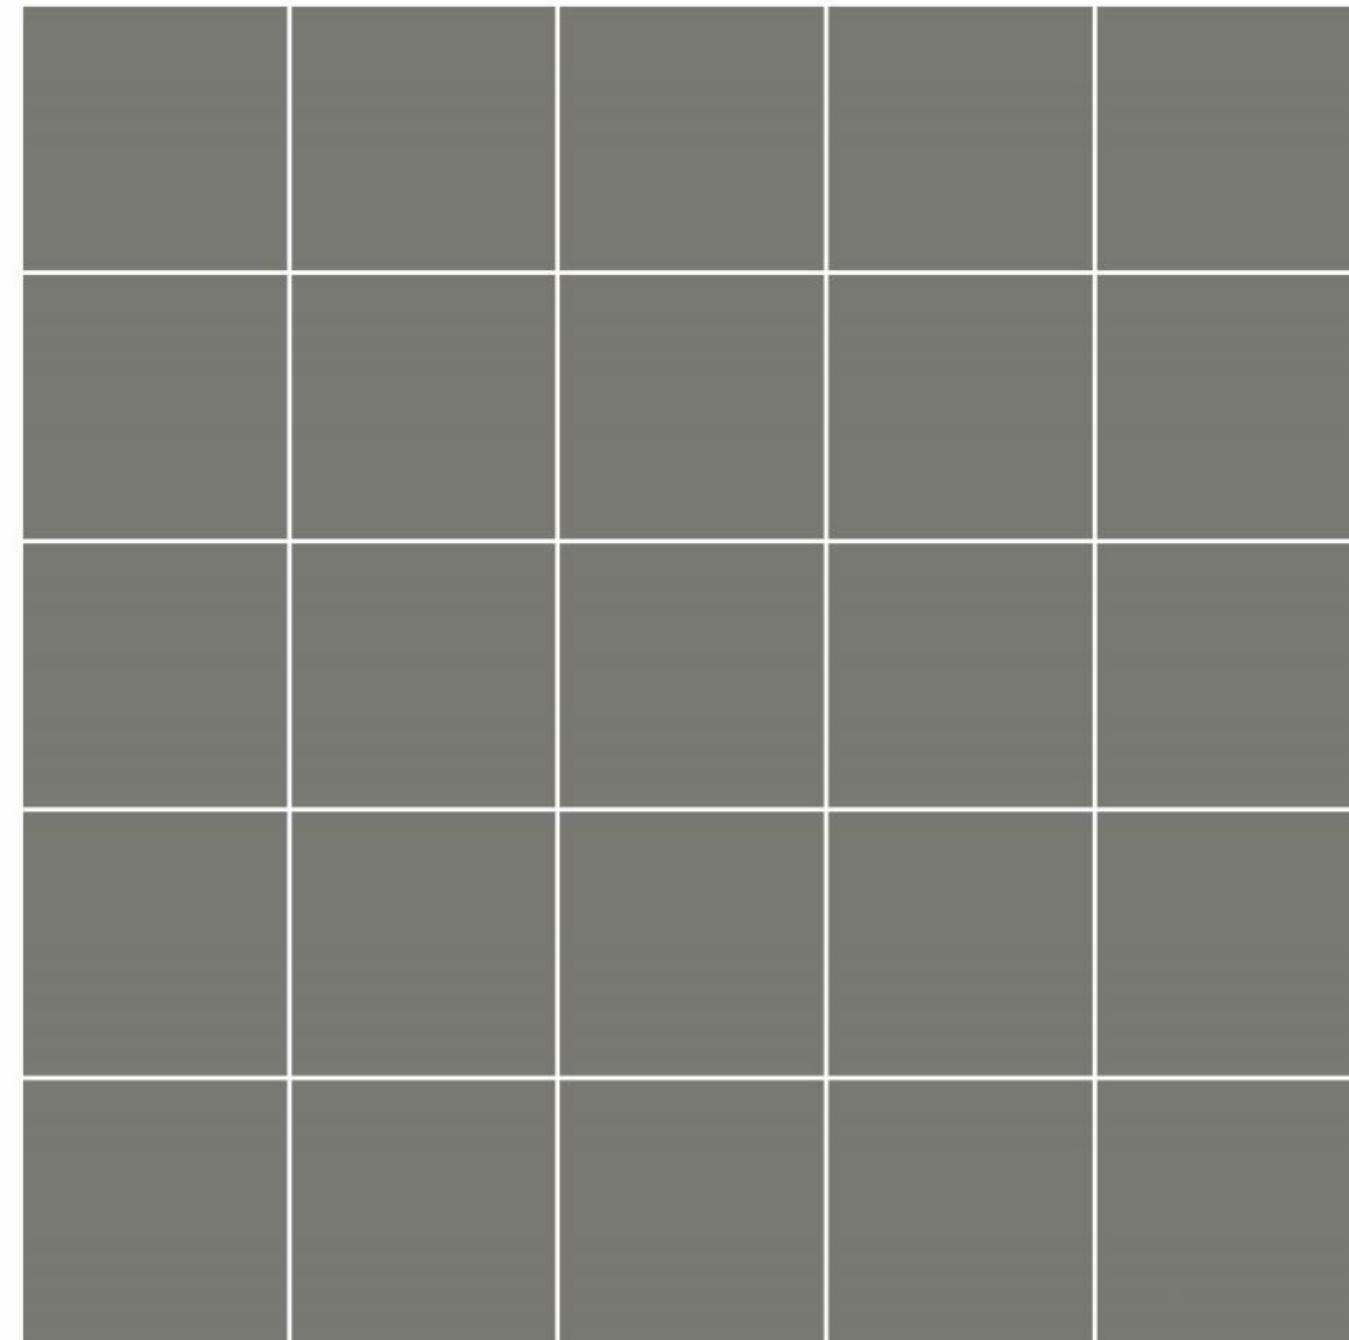

DARK GREY

FINISH: SM


THICKNESS: 12, 14, 16, 20 MM

SIZES: 300X300, 600X300, 600X600 MM



IMPACTA COLLECTION
HEAVY-DUTY TILES

 Restile
every inch of **imagination**

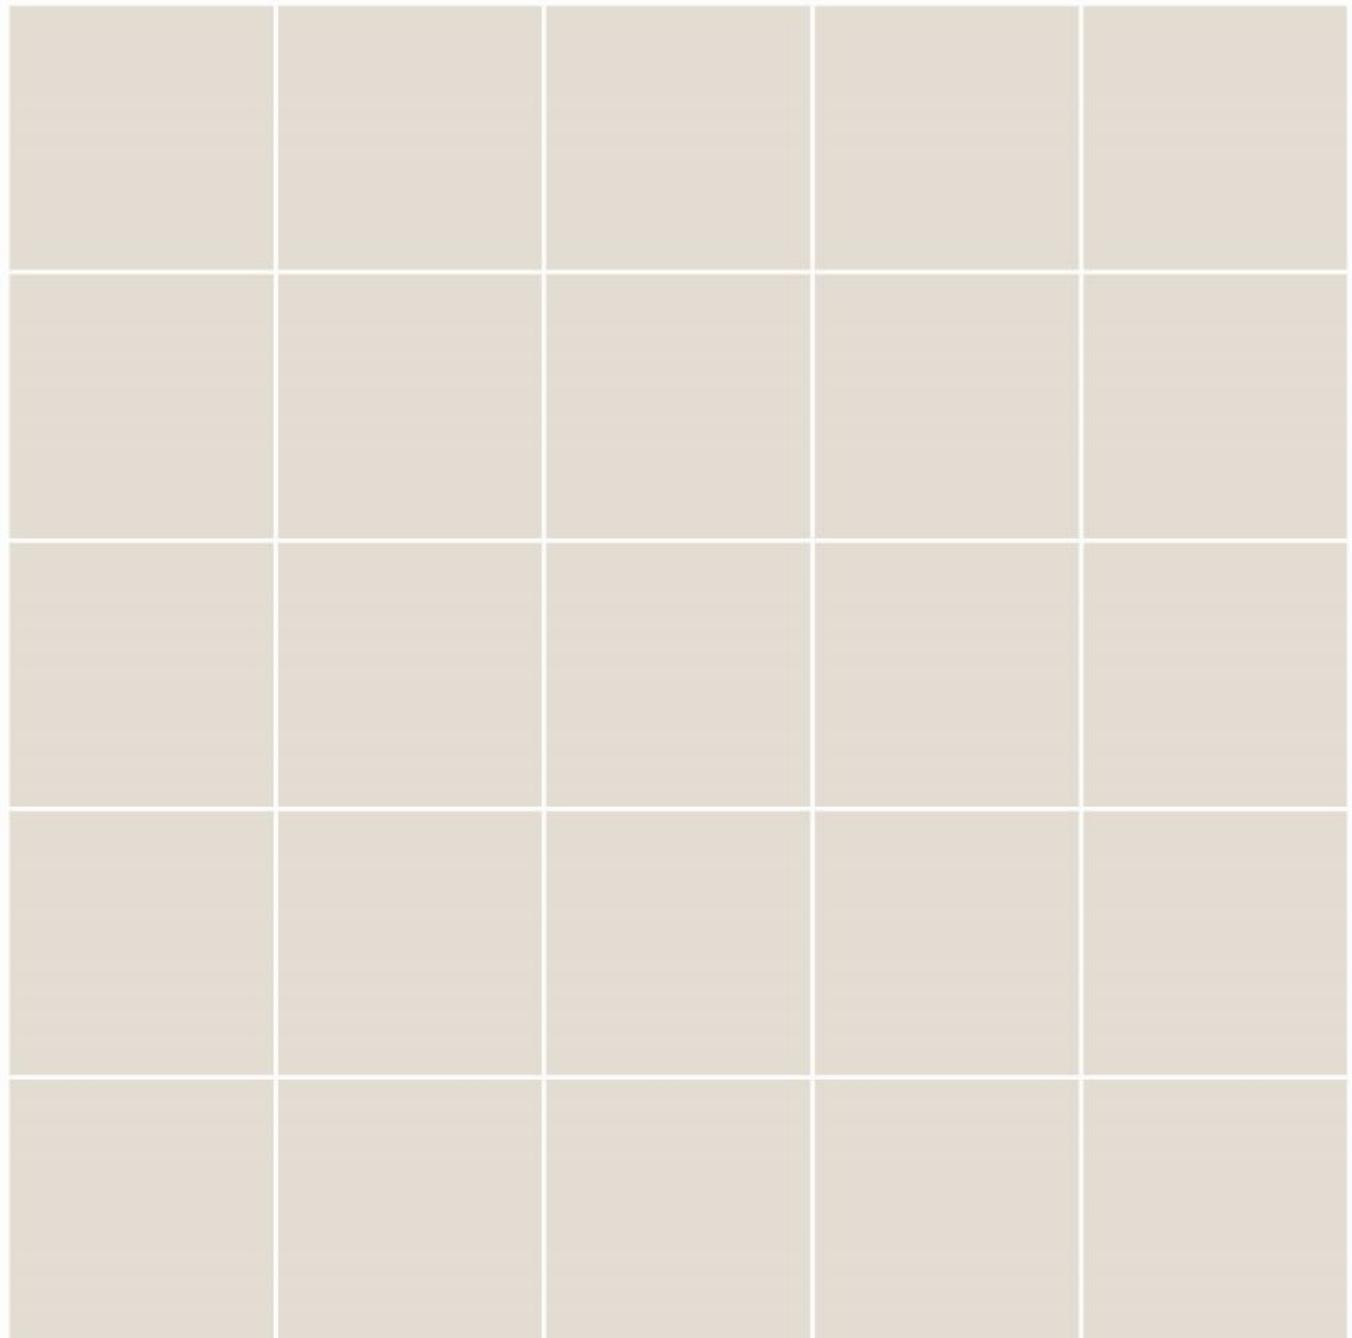

SUPER POLO

FINISH: SM


THICKNESS: 12, 14, 16, 20 MM

SIZES: 300X300, 600X300, 600X600 MM



IMPACTA COLLECTION
HEAVY-DUTY TILES

 Restile
every inch of **imagination**

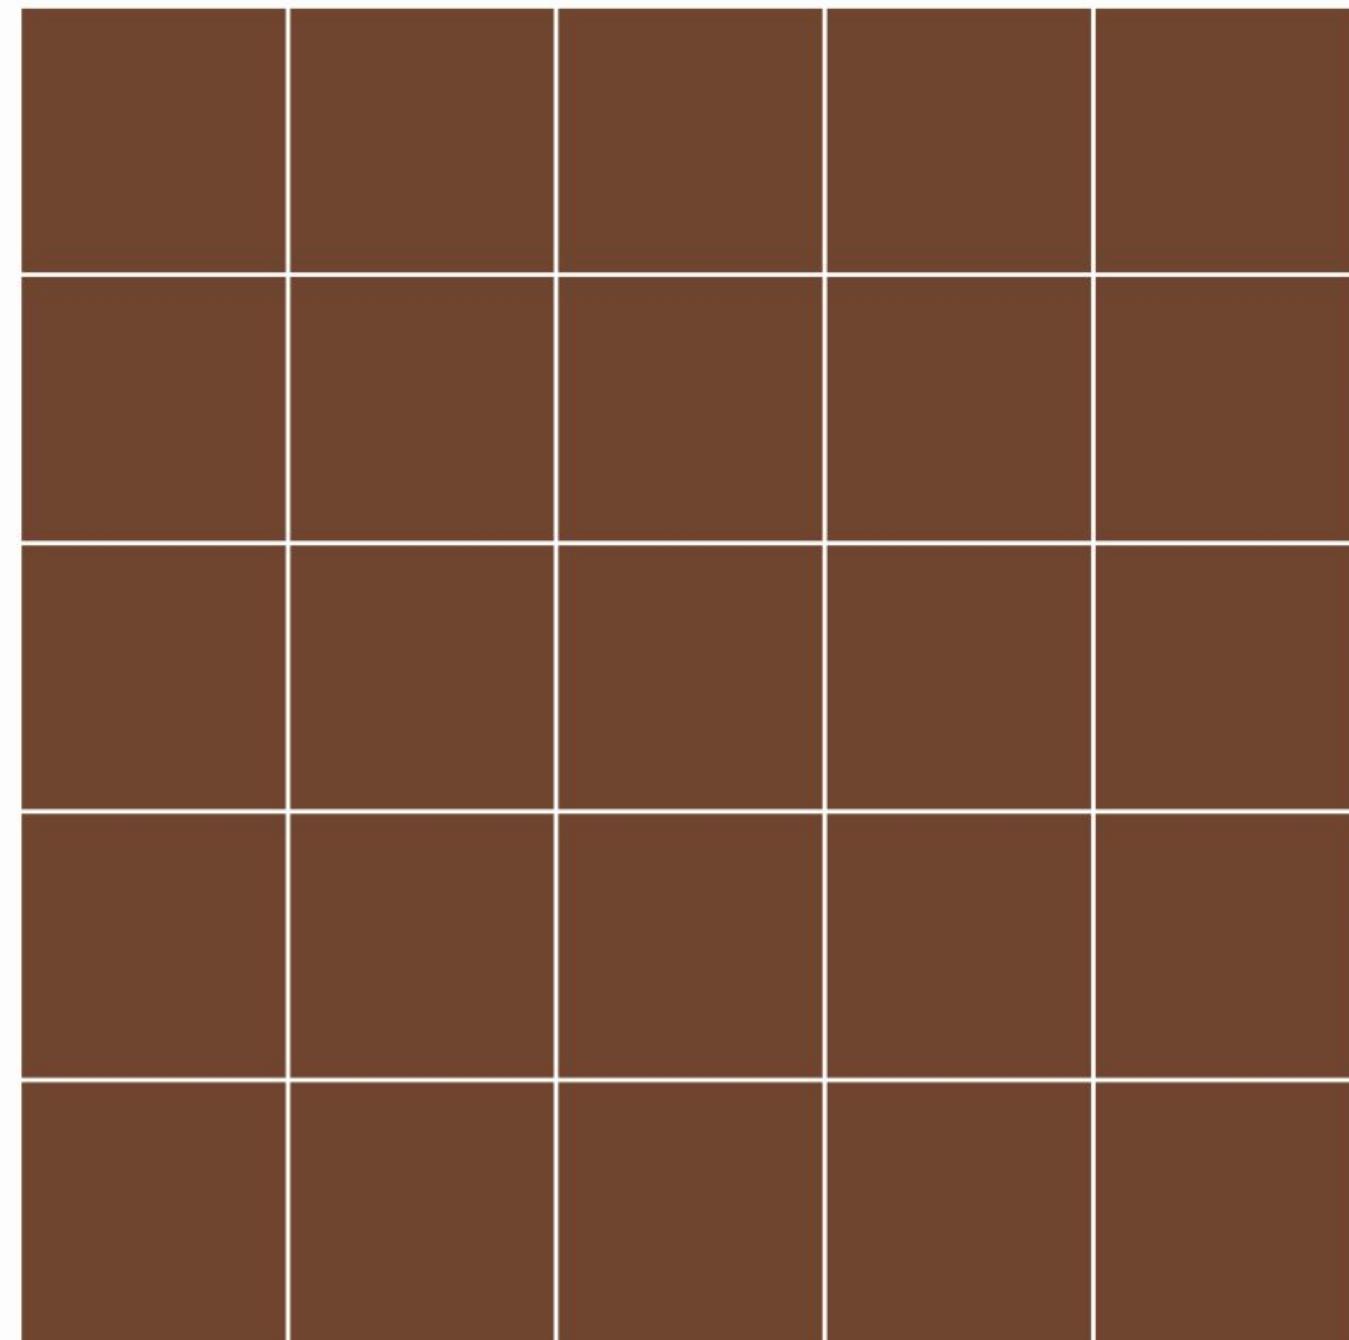


TERACOTTA

FINISH: SM

THICKNESS: 12, 14, 16, 20 MM

SIZES: 300X300, 600X300, 600X600 MM

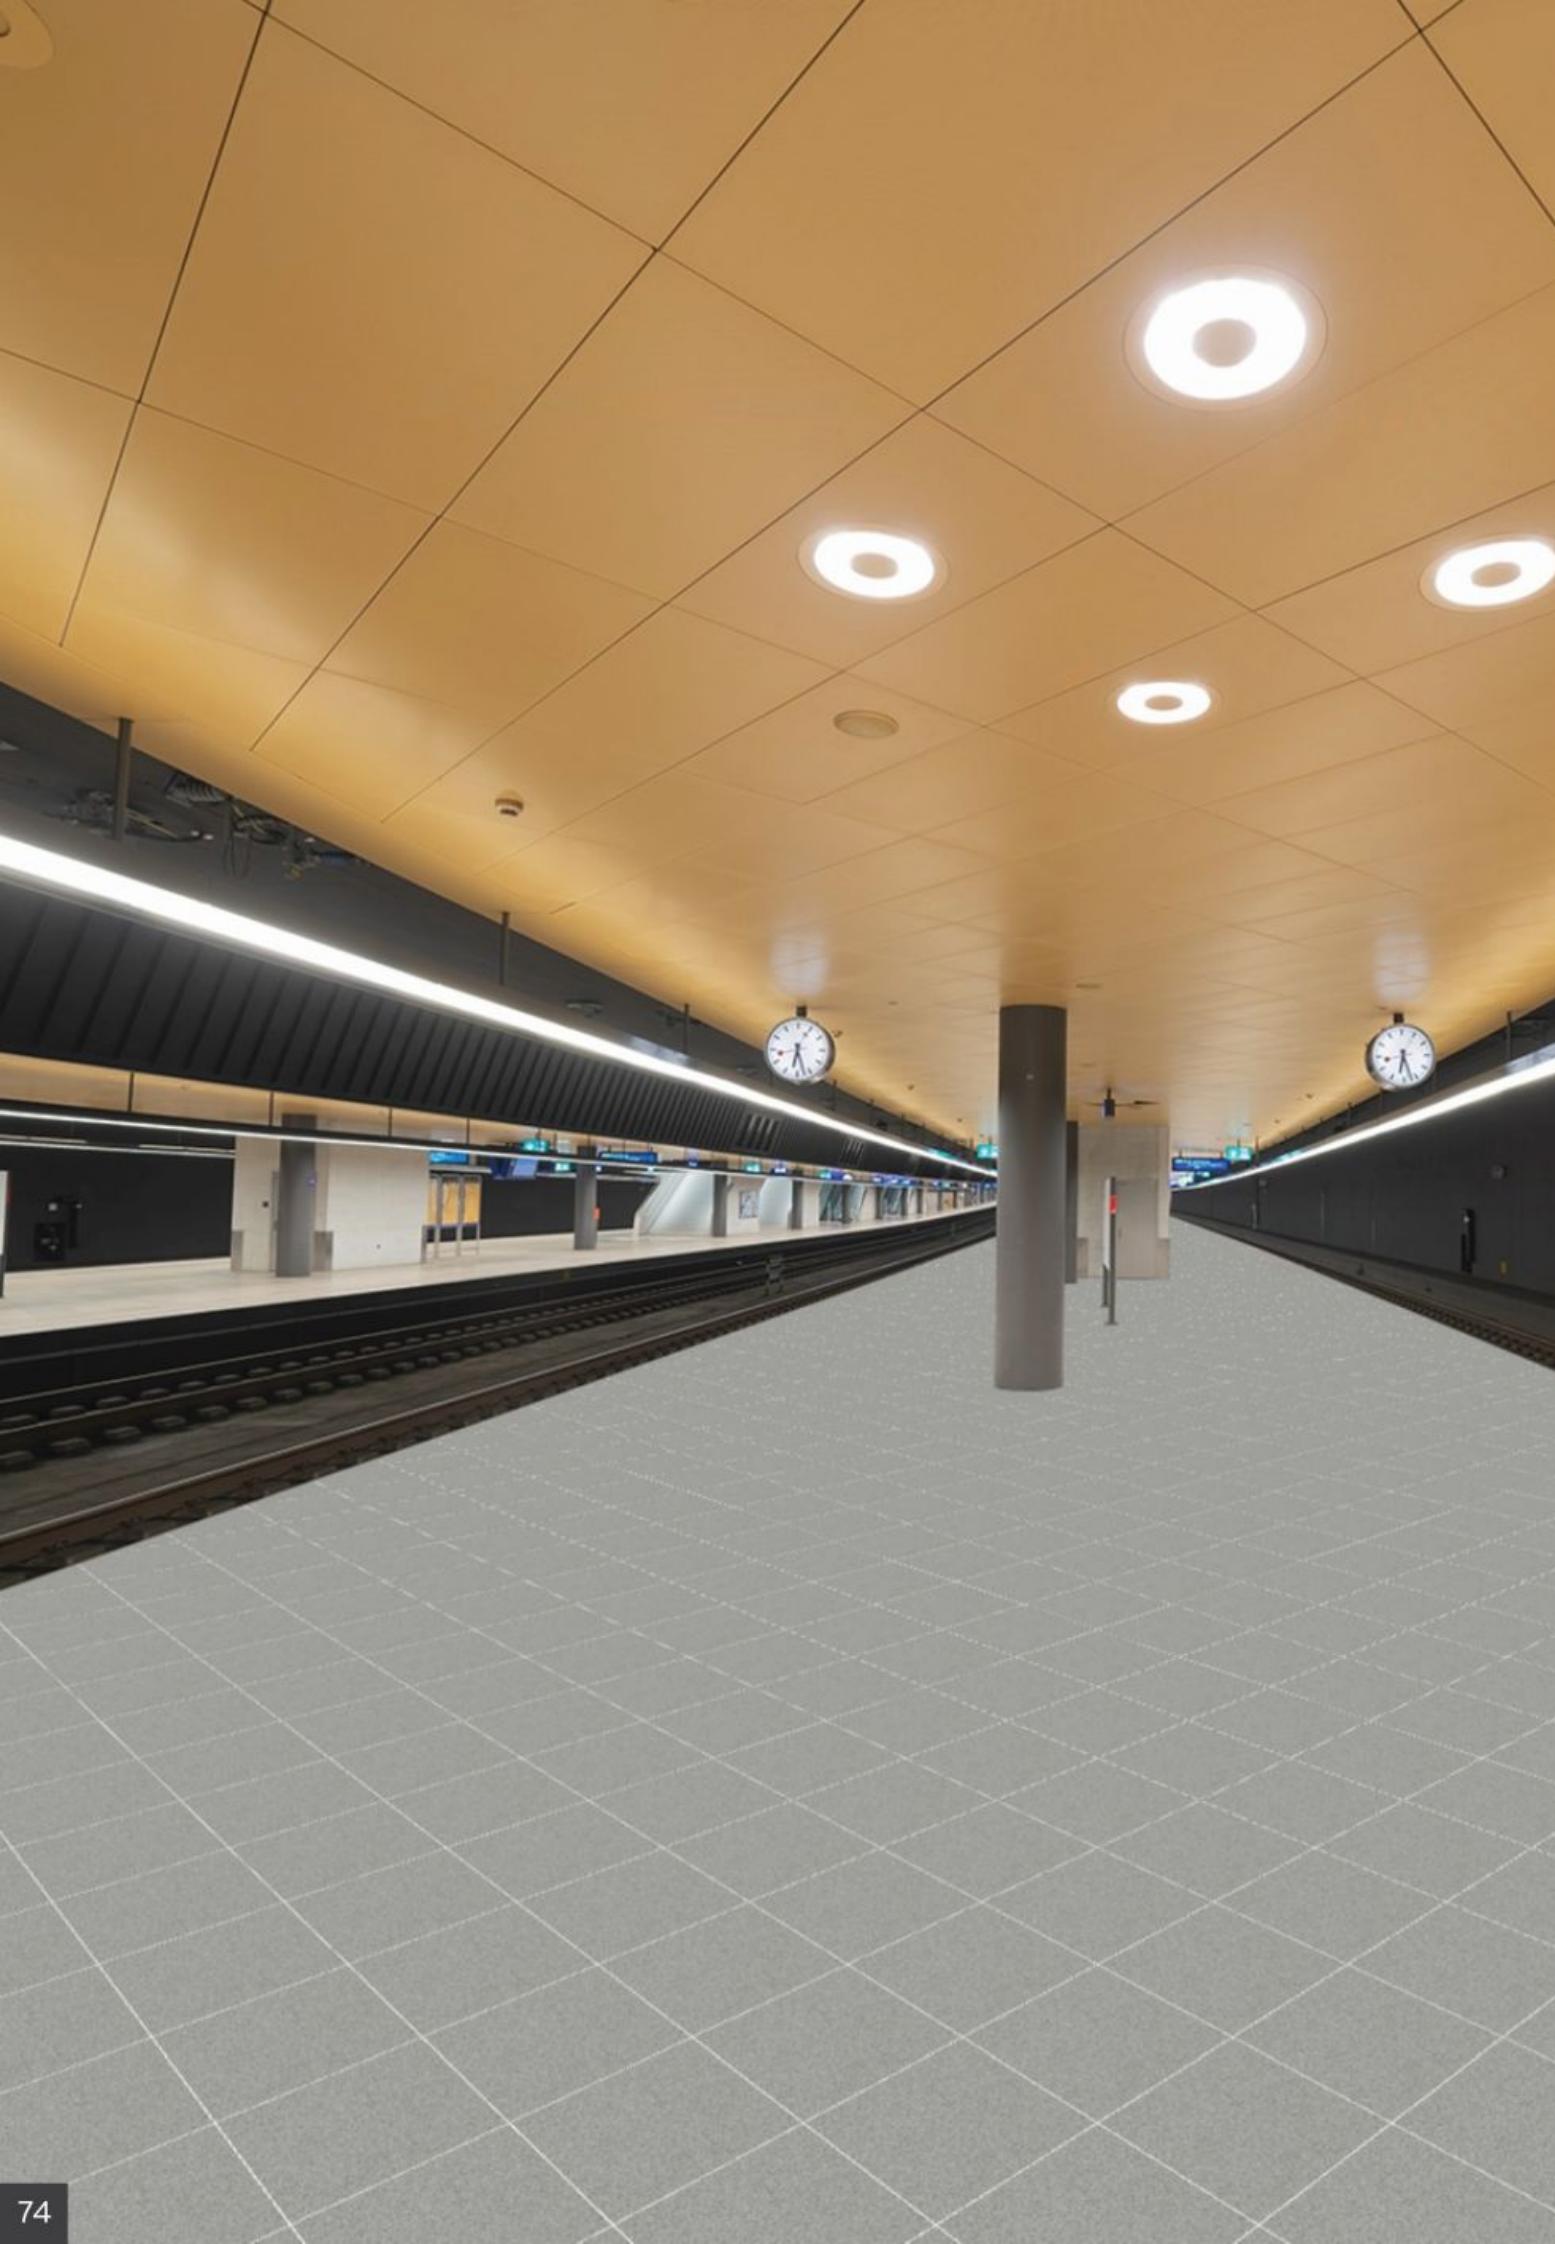

IMPACTA COLLECTION
HEAVY-DUTY TILES

 Restile
every inch of **imagination**



ELENA

FINISH: SM


THICKNESS: 12, 14, 16, 20 MM

SIZES: 300X300, 600X300, 600X600 MM



IMPACTA COLLECTION
HEAVY-DUTY TILES

 Restile
every inch of **imagination**

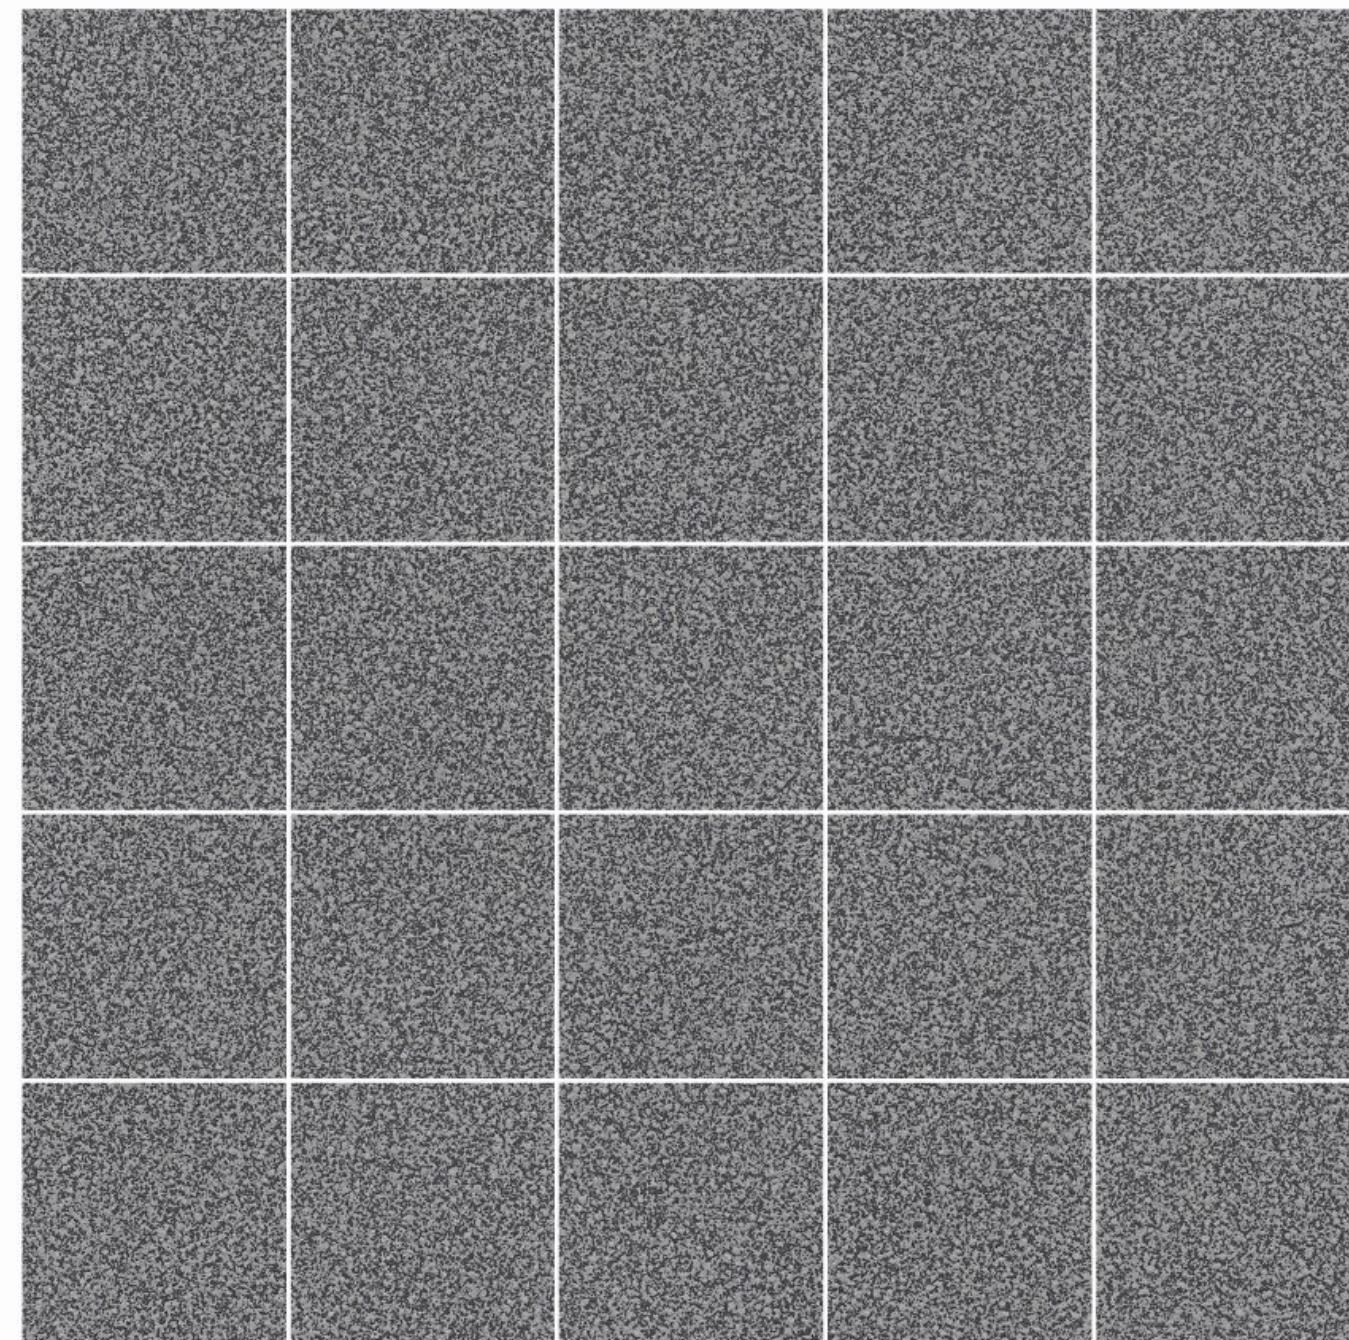

SANDY GREY

FINISH: AS

THICKNESS: 12, 14, 16, 20 MM

SIZES: 300X300, 600X300, 600X600 MM



TECHNICAL GRANITO TILES

300X300, 600X300, 600X600 - 9 MM

800X800 - 10 MM

** other sizes & thickness upon req

TECHNICAL SPECIFICATIONS UNGLAZED TILES

PROPERTIES	TEST METHOD	BIS 15622-2017 GROUP B1A	RESTILE TILE - 9MM	RESTILE TILE - 10MM
	LENGTH & WIDTH	BIS 13630-I ISO 10545-2	±0.1%	±0.1%
	THICKNESS	BIS 13630-I ISO 10545-2	±5%	±3%
	STRAIGHTNESS & RECTANGULARITY	BIS 13630-I ISO 10545-2	±0.1%	±0.1%
	SURFACE FLATNESS	BIS 13630-I ISO 10545-2	±0.5%	±0.15%
	SURFACE QUALITY	BIS 13630-I ISO 10545-2	min 95% no defects	min 95% no defects
	WATER ABSORPTION	BIS 13630-2 ISO 10545-3	avg < 0.08% ind max < 0.1%	<0.08%
	MODULUS OF RUPTURE	BIS 13630-6 ISO 10545-4	avg 35 ind. 32 min.	avg 35
	BREAKING STRENGTH	BIS 13630-6 ISO 10545-4	1300 min.	> 2200 N
	IMPACT RESISTANCE	BIS 13630-14 ISO 10545-5	0.55 min.	> 2400 N
	SCRATCH RESISTANCE	BIS 13630-13	5 min.	5 min.
	DEEP ABRASION RESISTANCE	BIS 13630-12 ISO 10545-6	140 max.	< 140
	THERMAL SHOCK RESISTANCE	BIS 13630-5 ISO 10545-9	10 cycles min.	no damage
	ANTI-SKID RESISTANCE	ISO 10545-17	manufacturer to declare value	SM - R 11 SANDY - R 12 FLAMED - R 13
	CHEMICAL RESISTANCE [UNGLAZED]	BIS 13630-7 ISO 10545-13	required	resistant
	STAIN RESISTANCE [UNGLAZED]	BIS 13630-7 ISO 10545-13	class 2 min.	resistant
RESTILE FINISHES: SM-SMOOTH, PL-POLISH, ANTI SKID-SANDY, ANTI SKID-FLAMED				

TECHNICAL GRANITO SLABS

SLAB : 1200X600, 1520X640 - 10 MM

**thickness of 12,14,16mm upon req

TECHNICAL SPECIFICATIONS UNGLAZED TILES

PROPERTIES	TEST METHOD	BIS 15622-2017 GROUP B1A	RESTILE SLAB 1200X600 MM	RESTILE SLAB 1520X640 MM
	LENGTH & WIDTH	BIS 13630-I ISO 10545-2	±0.1%	±0.1%
	THICKNESS	BIS 13630-I ISO 10545-2	±5%	±3%
	STRAIGHTNESS & RECTANGULARITY	BIS 13630-I ISO 10545-2	±0.1%	±0.1%
	SURFACE FLATNESS	BIS 13630-I ISO 10545-2	±0.5%	±0.15%
	SURFACE QUALITY	BIS 13630-I ISO 10545-2	min 95% no defects	min 95% no defects
	WATER ABSORPTION	BIS 13630-2 ISO 10545-3	avg < 0.08% ind max < 0.1%	<0.08%
	MODULUS OF RUPTURE	BIS 13630-6 ISO 10545-4	avg 35 ind. 32 min.	avg 35
	BREAKING STRENGTH	BIS 13630-6 ISO 10545-4	1300 min.	> 1800 N
	IMPACT RESISTANCE	BIS 13630-14 ISO 10545-5	0.55 min.	0.55 min.
	SCRATCH RESISTANCE	BIS 13630-13	5 min.	5 min.
	DEEP ABRASION RESISTANCE	BIS 13630-12 ISO 10545-6	140 max.	< 140
	THERMAL SHOCK RESISTANCE	BIS 13630-5 ISO 10545-9	10 cycles min.	no damage
	ANTI-SKID RESISTANCE	ISO 10545-17	manufacturer to declare value	SM - R 11 SANDY - R 12 FLAMED - R 13
	CHEMICAL RESISTANCE [UNGLAZED]	BIS 13630-7 ISO 10545-13	required	resistant
	STAIN RESISTANCE [UNGLAZED]	BIS 13630-7 ISO 10545-13	class 2 min.	resistant
RESTILE FINISHES: SM-SMOOTH, PL-POLISH, ANTI SKID-SANDY, ANTI SKID-FLAMED				

READY TO INSTALL - STEPS

STEPS : 1200X300, 1520X310 - 12 MM

**thickness of 14MM upon req

TECHNICAL SPECIFICATIONS UNGLAZED TILES

PROPERTIES	TEST METHOD	BIS I5622-2017 GROUP B1A	RESTILE STEP 1200X300 MM	RESTILE STEP 1520X310 MM
	LENGTH & WIDTH	BIS I3630-1 ISO 10545-2	±0.1%	±0.1%
	THICKNESS	BIS I3630-1 ISO 10545-2	±5%	±3%
	Straightness & Rectangularity	BIS I3630-1 ISO 10545-2	±0.1%	±0.1%
	Surface Flatness	BIS I3630-1 ISO 10545-2	±0.5%	±0.3%
	Surface Quality	BIS I3630-1 ISO 10545-2	min 95% no defects	min 95% no defects
	Water Absorption	BIS I3630-2 ISO 10545-3	avg < 0.08% Ind max < 0.1%	<0.08%
	Modulus of Rupture	BIS I3630-6 ISO 10545-4	avg 35 ind. 32 min.	avg 35
	Breaking Strength	BIS I3630-6 ISO 10545-4	1300 min.	> 1800 N
	Impact Resistance	BIS I3630-14 ISO 10545-5	0.55 min.	0.55 min.
	Scratch Resistance	BIS I3630-13	5 min.	5 min.
	Deep Abrasion Resistance	BIS I3630-12 ISO 10545-6	140 max.	< 140
	Thermal Shock Resistance	BIS I3630-5 ISO 10545-9	10 cycles min.	no damage
	Anti-Skid Resistance	ISO 10545-17	manufacturer to declare value	SM - R 11 SANDY - R 12 FLAMED - R 13
	Chemical Resistance [Unglazed]	BIS I3630-7 ISO 10545-13	required	resistant
	Stain Resistance [Unglazed]	BIS I3630-7 ISO 10545-13	class 2 min.	class 2 min.
RESTILE FINISHES: SM-SMOOTH, PL-POLISH, ANTI SKID-SANDY, ANTI SKID-FLAMED				

HEAVY DUTY - INDUSTRIAL TILES

300X300, 600X300, 600X600

14, 16, 20 MM

TECHNICAL SPECIFICATIONS UNGLAZED TILES

PROPERTIES	TEST METHOD	BIS I5622-2017 GROUP B1A	RESTILE 600X600 - 14MM	RESTILE 600X600 - 16MM	RESTILE 600X600 - 20MM
	LENGTH & WIDTH	BIS I3630-1 ISO 10545-2	±0.1%	±0.1%	±0.1%
	Thickness	BIS I3630-1 ISO 10545-2	±0.3%	±0.3%	±0.3%
	Straightness & Rectangularity	BIS I3630-1 ISO 10545-2	±0.1%	±0.1%	±0.1%
	Surface Flatness	BIS I3630-1 ISO 10545-2	±0.5%	±0.15%	±0.15%
	Surface Quality	BIS I3630-1 ISO 10545-2	min 95% no defects	min 95% no defects	min 95% no defects
	Water Absorption	BIS I3630-2 ISO 10545-3	avg < 0.08% Ind < 0.1%	<0.08%	<0.08%
	Modulus of Rupture	BIS I3630-6 ISO 10545-4	avg 35 ind. 32 min.	avg 37	avg 37
	Breaking Strength	BIS I3630-6 ISO 10545-4	1300 min.	>3800 N	> 4200 N
	Impact Resistance	BIS I3630-14 ISO 10545-5	0.55 min.	0.55 min.	0.55 min.
	Scratch Resistance	BIS I3630-13	5 min.	6 min.	6 min.
	Deep Abrasion Resistance	BIS I3630-12 ISO 10545-6	140 max.	< 140	< 140
	Thermal Shock Resistance	BIS I3630-5 ISO 10545-9	10 cycles min.	no damage	no damage
	Anti-Skid Resistance	ISO 10545-17	manufacturer to declare value	SM - R 11 SANDY - R 12 FLAMED - R 13	SM - R 11 SANDY - R 12 FLAMED - R 13
	Chemical Resistance [Unglazed]	BIS I3630-8 ISO 10545-13	required	resistant	resistant
	Stain Resistance [Unglazed]	BIS I3630-7 ISO 10545-13	class 2 min.	class 2 min.	class 2 min.
IS 4457:2006 SPECIFICATIONS CAN BE PROVIDED AS PER REQUEST					

LAYING INSTRUCTIONS



1. PREPARE THE FLOOR

the surface on which the tiles must be installed needs to be perfectly flat, compact, dry dust-free with no cracks or visible damage.



5. SPACERS

it is always recommended to use spacers of minimum 3mm between each tile. this not only increases the aesthetics of the floor, but it also helps in absorbing any possible deformations liable to be felt in the structures.




2. CEMENT & ADHESIVES

use cement and sand mortar in the ratio of 1:4 and add some water to create a consistent paste. using a notched trowel, apply a 20-30mm of bedding on the laying surface. apply a fine layer on the back side of the tile. for heavy traffic - we recommend a 3inch RCC substrate in 1:2 ratio



6. AIR GAPS

one of the biggest issue with laying is process of eliminating air gaps. if not done properly, this results in the tile to break. gently hit the surface of the tile with rubber hammer or rubber float and ensure the corners are completely stuck.

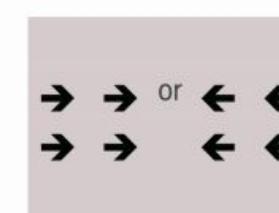

3. LAYING DIRECTIONS

before laying the tile look for the arrow () on the back of the tile and follow the laying as shown for good result of tiling.



7. GROUTING

always wait for the adhesive mix to dry completely before grouting the joints. apply the grout using a rubber trowel. both cement and epoxy grout can be used. when using epoxy grouts, we recommend you clean and remove all excess grout from the tile surface immediately with a clean wet sponge.



4. START TILE LAYING

always prepare a dry laying of the tile before starting the actual laying of the tile. start the laying of the tile from the center and move towards the edges.



8. CLEANING

after the installation of the tiles, it should be properly covered with suitable material to prevent the tiles from damage and only after the 5th day of laying should the floor be washed completely using diluted acid cleaning solutions as per manufacturers recommendations.

FACTORY ADDRESS

BELL GRANITO CERAMICA LIMITED
VILLAGE GAVASAD, TALUKA PADRA
DISTRICT VADODARA 391430
GUJARAT, INDIA

EXPORTS

MR. HARINATHA REDDY
E: EXPORTS@RESTILE.COM
M: +62-8158855781

5TH FLOOR, 501, THE HONEY LADY
BUILDING, JLN PLUIT SELATAN
RAYA KAWASAN, CBD PLUIT
JAKARTA - 14440
INDONESIA

NORTH INDIA

DELHI-NCR
JAY JETHWA
E: JAY.JETHWA@RESTILE.COM
M: +91-9974408673

UP - UK - RJ - HP
JAY JETHWA
E: JAY.JETHWA@RESTILE.COM
M: +91-9974408673

CH-PB-HR
JAY JETHWA
E: JAY.JETHWA@RESTILE.COM
M: +91-9974408673

SOUTH INDIA

TAMILNADU
K. VENKATRAMAN
E: VENKATRAMAN@RESTILE.COM
M: +91-9840098877

KARNATAKA
HASMITA TAUNK
E: HASMITA.TAUNK@RESTILE.COM
M: +91-7738060818

TELANGANA & ANDHRA PRADESH
HASMITA TAUNK
E: HASMITA.TAUNK@RESTILE.COM
M: +91-7738060818

GET YOUR EXCLUSIVE



FULL BODY TILE NOW!

WEST INDIA

GUJARAT
NIKUNJ RAWAL
E: NIKUNJ.RAWAL@RESTILE.COM
M: +91-7600055280

GUJARAT - AHMEDABAD
RAVI SHAH
E: RAVI SHAH@RESTILE.COM
M: +91-8511860074

GUJARAT - SURAT
DARSHIT MEHTA
E: DARSHIT.MEHTA@RESTILE.COM
M: +91-9724340616

MP - INDORE BHOPAL
NIKUNJ RAWAL
E: NIKUNJ.RAWAL@RESTILE.COM
M: +91-7600055280

WEST INDIA

MAHARASHTRA
HASMITA TAUNK
E: HASMITA.TAUNK@RESTILE.COM
M: +91-7738060818

PUNE & REST OF MH
MAHENDRA KARLE
E: MAHENDRA.KARLE@RESTILE.COM
M: +91-7718884690

CHATTISGARH
HASMITA TAUNK
E: HASMITA.TAUNK@RESTILE.COM
M: +91-7738060818

EAST INDIA

WEST BENGAL, ODISHA
JAY JETHWA
E: JAY.JETHWA@RESTILE.COM
M: +91-9974408673

ASSAM, BIHAR, SIKKIM
JAY JETHWA
E: JAY.JETHWA@RESTILE.COM
M: +91-9974408673

KOLKATA
ASHISH SHUKLA
E: ASHISH.SHUKLA@RESTILE.COM
M: +91-7490001796



WWW.RESTILE.COM

