

Restile[®]
The Original **FULBODY** Tiles

RESTILE CERAMICS LIMITED

Regd. Office & Works: Malkapur Village, Hatnoora Mandal, (Via) Ismail Khan Pet, Medak Dist. - 502 296, A.P., India.

Tel: +91-8458-200499/599, 288772 Fax: +91-8458-288502 E-mail: works@restile.com

Gujarat Address: Village: Gavasad, Taluka: Padra, District Vadodara – 391 430.

Tel: +91-2662-242350 Fax: +91-2662-245222 E-mail: barodaworks@restile.com

E-mail: contact@restile.com, investor.relations@restile.com

www.restile.com

The Originals

Homogeneous Body

Large Format

Restile[®]
The Original **FULBODY** Tiles

Marble Series

905mm x 905mm Size



Restile The Originals

MARBOGRANIT range of Bell Granito RESTILE CERAMICS LTD, being a pioneer in vitrified tile and in the business of flooring tiles since 1986 holds excellent reputation in the industry. The company employs the best practices and highest quality standards in the industry. While it works constantly on quality up-gradation, the company is known for introducing innovative product range on frequent intervals.

Restile is the only brand in Indian market to make 100% of its production as full body vitrified tile in right earnest. The competition is fierce affecting the quality standards in general, but at RESTILE quality comes first, the stand vindicated by the numerous repeat purchases from reputed clients from all major sectors viz. Retail, Hospitality, Pharma & Healthcare, Food & Beverages, Airports, Financial / Educational / Government Institutions and so on.

Restile was launched as Fully Vitrified Unglazed and Polished Monolithic floor tiles in smooth, rough as well as Mirror Polished finishes. The commercial production commenced in 1991 with an initial installed capacity of 5,40,000 sq mtrs. per annum. The capacity has been ramped up since then to 52,50,000 sq. mtrs per annum through expansion and addition MARBOGRANIT range of Bell Granito Ceramica Limited from Baroda, Gujarat Unit.



Restile[®]
The Original **FULBODY** Tiles



MARBO GRANIT 905mmx905mm
600mmx600mm
Elegance of marble, Strength of granite

MARBOGRANIT is a well established brand exclusively for original marble admirers as this is the better alternative to natural marble. A wonderful recreation of marble and granite in a unique and absolutely original form. A collection of natural marble designs with high glossy finish surface. It took years of experience and superior technology from Italy to capture the beauty of nature on the vitrified surface.

Full Body Vitrified Tiles




Full Body Design Vitrified Tile surfaces will retain the same look irrespective of wear & tear.

Non Full Body Vitrified Tiles



All other surfaces of non Full Body Design Vitrified Tile will fade away over a period of time due to heavy wear & tear.



I VORY



TULI P



FREESI A



HANA


905mmx905mm
600mmx600mm



CALLA LI LY



ANTHURI UM

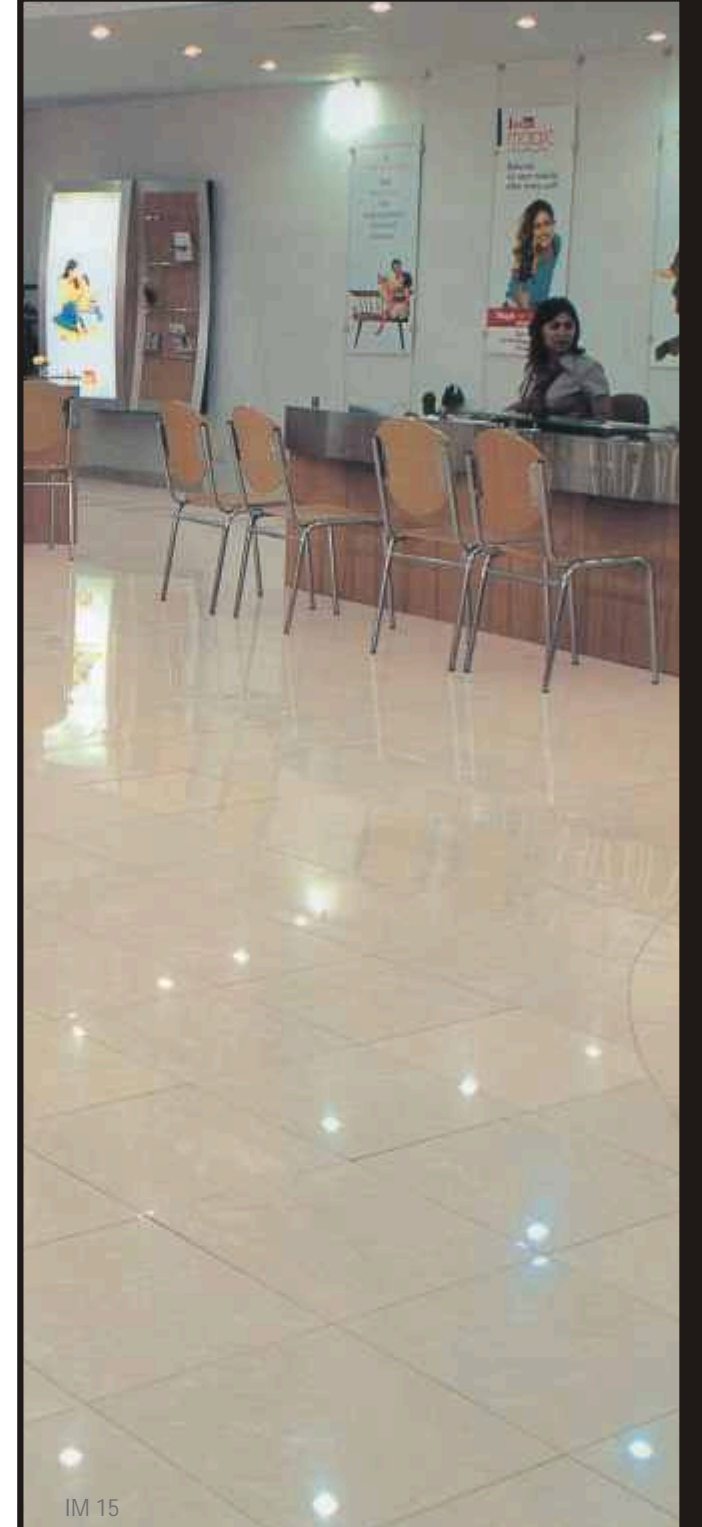

IM 15

905mmx905mm
600mmx600mm



IM-15



CL-25



SG-246




RL-51



IM - 15 & SG - 246

905mmx905mm
600mmx600mm



RL-50




CL-33



NM-701



NM-703

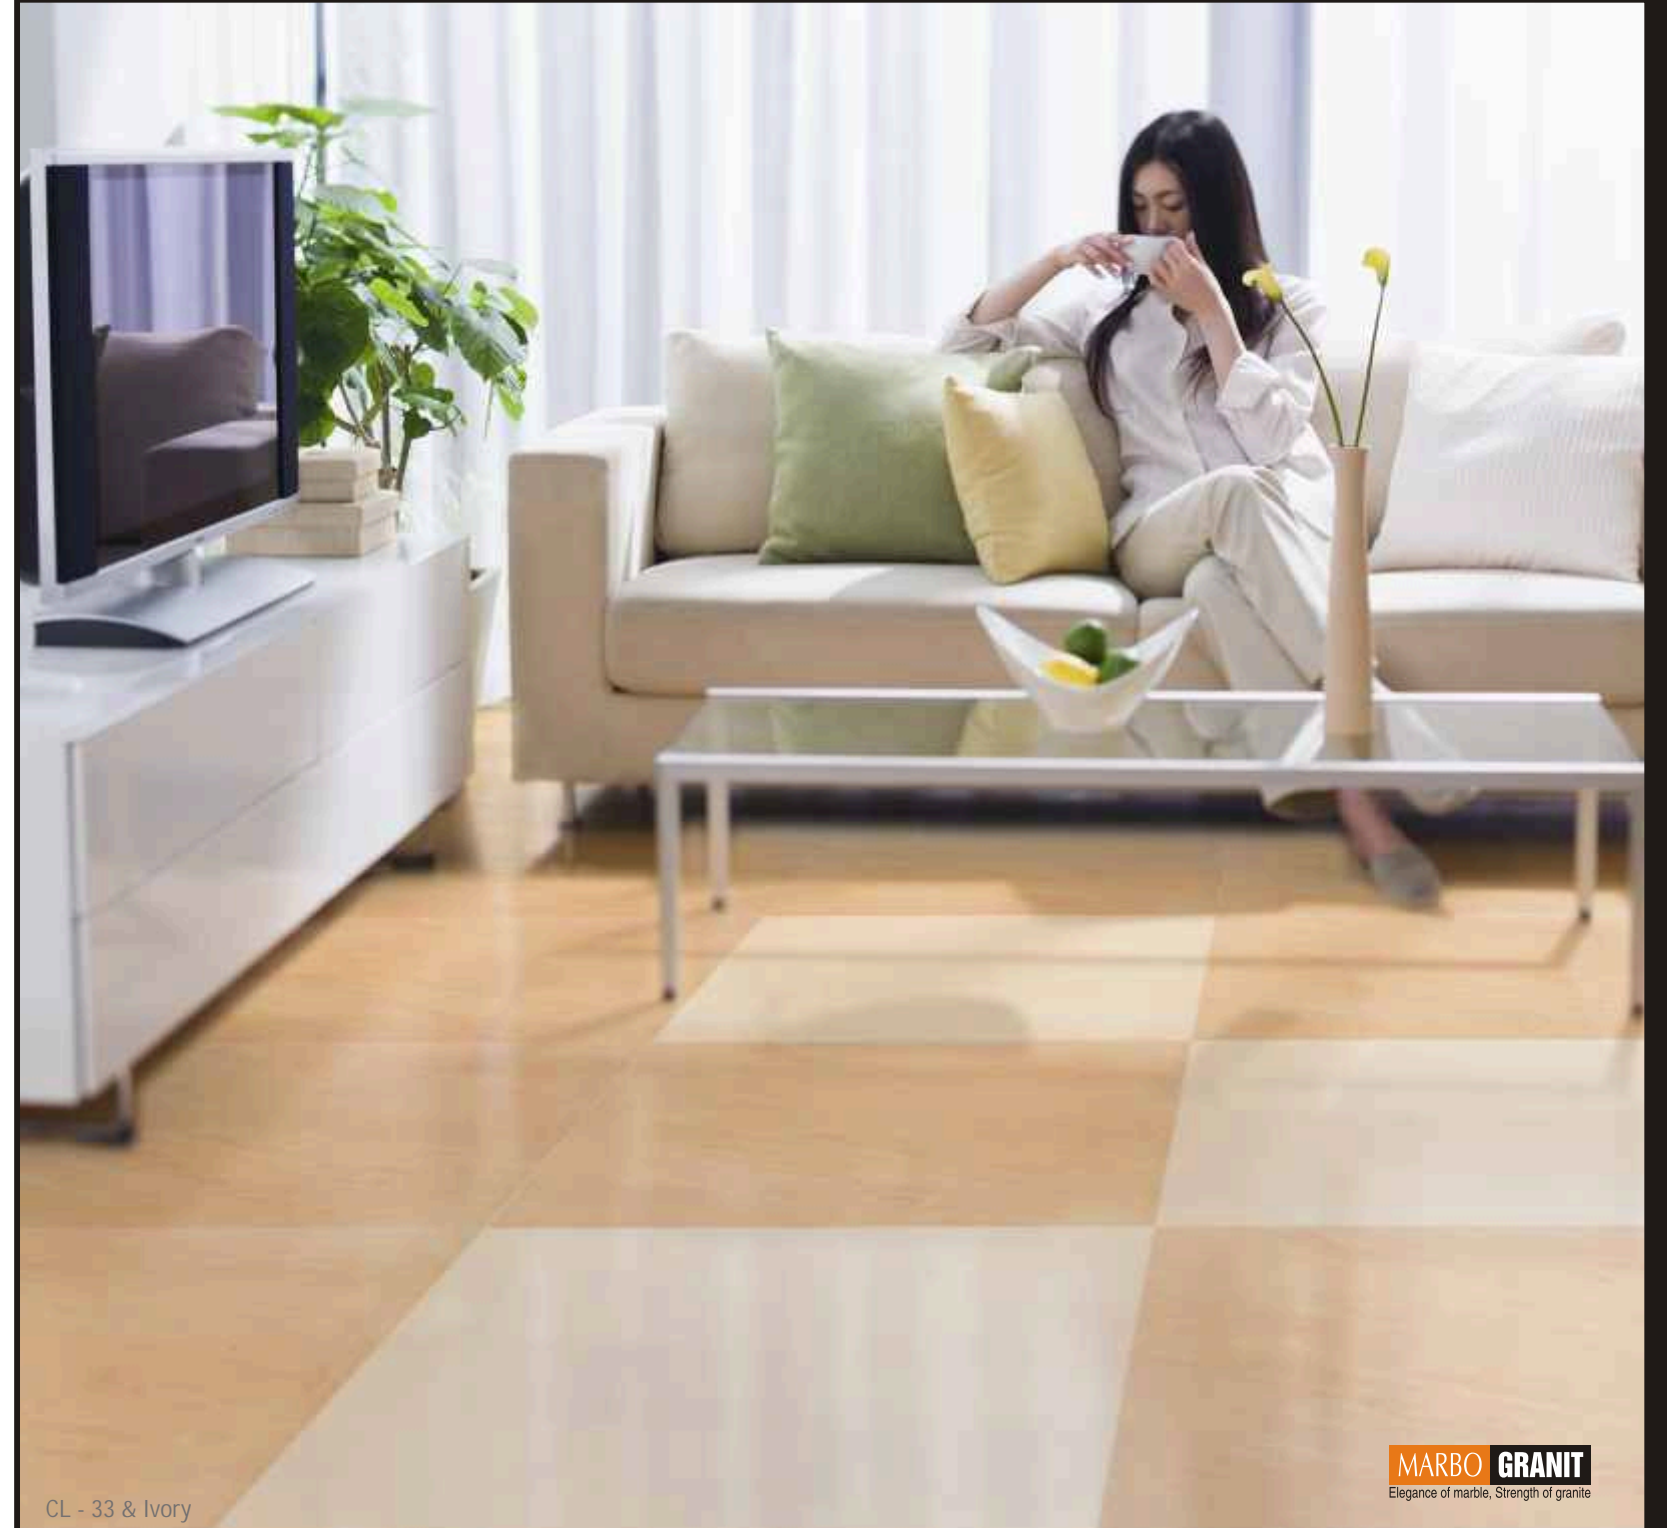

CL - 33 & Ivory


905mmx905mm
600mmx600mm



CL-30



CL-2051

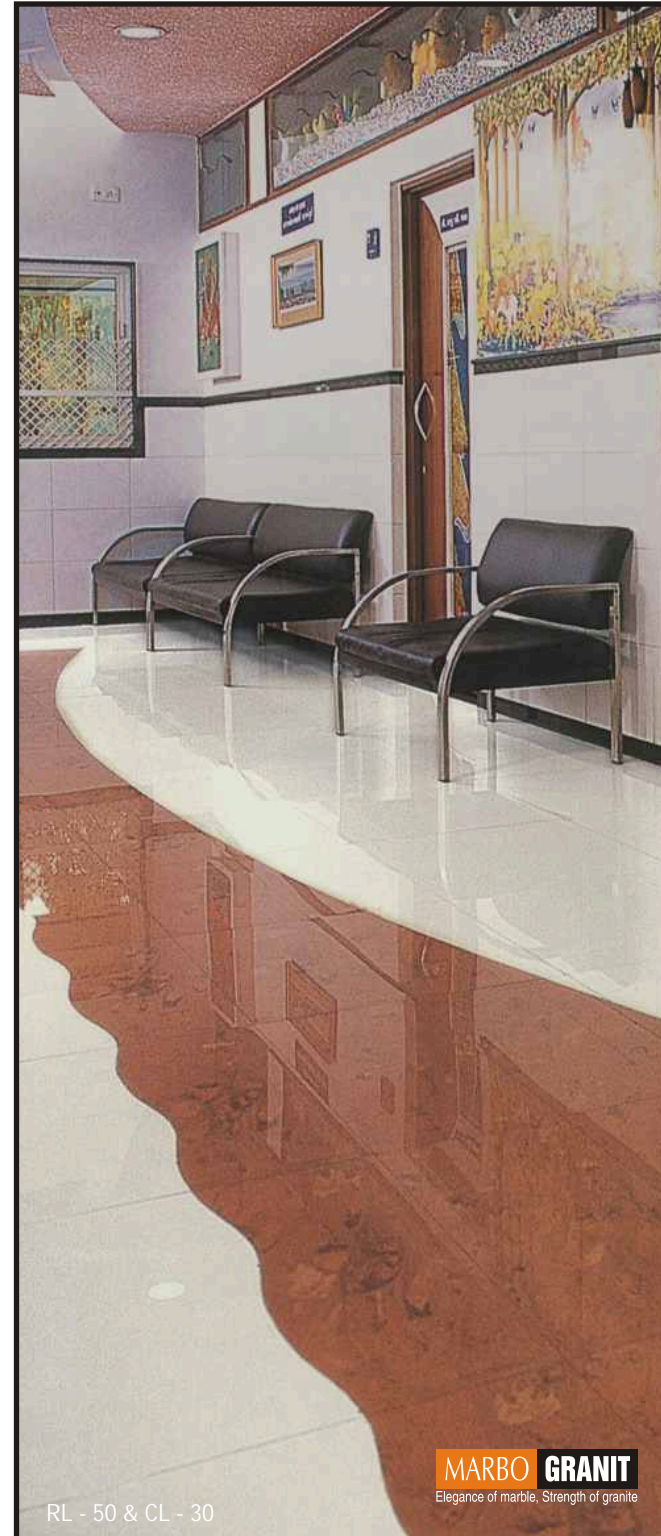

RL - 50 & CL - 30

MARBO GRANIT
Elegance of marble, Strength of granite

Technical Specifications of the Products

Sr. No.	Technical Properties	Method of Testing	International Standards ISO 13006 / EN 176 Group Bla	Our Average Value
1	Chemical Resistance	EN 106	No Damage	No Damage
2	Stain Resistance to Light	ISO 10545 - 14	Resistant	Resistant
3	Breaking Strength	ASTM C - 648	1113 N	2829 N
4	Resistance to Thermal Shock	EN 104	No Damage	No Damage
5	Determination of Dimension	EN 98		
6	Sides	EN 98	± 0.6 %	± 0.1 %
7	Thickness	EN 98	± 5 %	± 1 %
8	Straightness of Sides	EN 98	± 0.5 %	± 0.1 %
9	Rectangularity	EN 98	± 0.6 %	± 0.2 %
10	Surface Flatness	EN 98	± 0.5 %	± 0.2 %
11	Water Absorption	EN 99	0.5 %	0.07 %
12	Flexion Resistance	EN 100	to 27 N / mm ²	> 47.3 N / mm ²
13	MOHS Hardness	EN 101	6 MOHS	8 MOHS
14	Abrasion Resistance	EN 102	205 mm ³	< 144 mm ³
15	Co-efficient of Linear Thermal Expansion	EN 103	9 x 10 ⁻⁶ °C ⁻¹	6.4 x 10 ⁻⁶ °C ⁻¹
16	Resistance to Thermal Shock	EN 104	No Damage	No Damage
17	Frost Resistance	EN 202	Frost Proof	Frost Proof
18	Skid Resistance (Friction co-efficient)	ASTM C - 1028	> 0.4	> 0.6

Packing Details

Size	Nominal Thickness	No. of Tiles per Box	Area Covered
905mm x 905 mm	11.5 mm	2 Pieces	17.63 sq. ft.
600mm x 600 mm	9.5 mm	4 Pieces	15.50 sq. ft.

Applications



Branch Offices :

AHMEDABAD :
3, Shreyas Complex,
Behind Rushika Complex,
Near Dinesh Hall,
Income Tax Cross Road,
Ashram Road,
Ahmedabad - 380 009.
Tel: 079 - 2658 1697,
Telefax: 079 - 4006 9079

CHANDIGARH :
Tel.: 0172 - 2637934

CHENNAI :
Tel.: 044 - 4355 1231

HYDERABAD :
Tel.: 040 - 2375 4060

KOCHI :
Tel.: 0484 - 2809 671

MUMBAI :
506,507 Acme Plaza, Andheri Kurla
Road, Andheri (East), Mumbai-400 059.
Tel.: 022 - 2824 4518,
Fax: 022 - 2822 2410

NEW DELHI :
C- 107, 2nd Floor,
Lajpat Nagar-I, New Delhi -110 024.
Tel: 011 - 2981 0932,
Tel/Fax: 011 - 2981 0931,
Cell: 98100 59745

PUNE :
Office No. 20, 2nd Floor,
Dalal Chambers,
Behind Shivaji Maharaj Statue,
Market Yard, Near Darpan Hotel,
Pune - 411 037.
Tel: 020 - 2426 1257

BANGALORE :
Tel.: 080 - 6454 1565

International Correspondence: C/o. 24, Boon Lay Way, # 01-73, Trade Hub 21, Singapore - 609969
Tel.:- +65-63247787 Fax:- +65-63247797 E-mail: exports@restile.com